



# Glastender®

A family company manufacturing in the USA

[www.glastender.com](http://www.glastender.com)

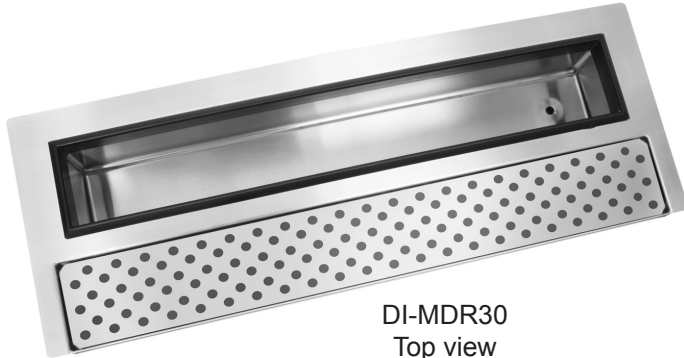

DI-MDR30  
Top view

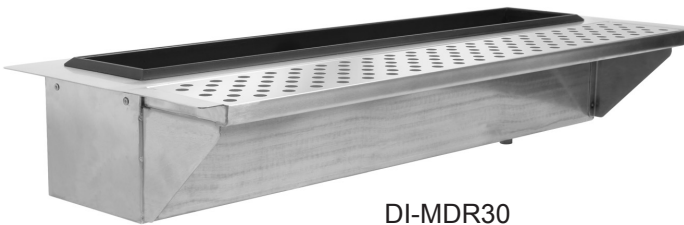

DI-MDR30  
Side view



**Intertek**

4004503  
Conforms to ANSI/NSF STD 2



DI-MDR30  
Shown installed and dressed  
(1/9th pans and bottles not included)

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Mixology Drink Rails

<b>DI-MDR</b>	DI-MDR24, DI-MDR30, DI-MDR36
---------------	------------------------------

### Standard Features

- Stainless steel top and interior liner
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner and acts as thermal barrier to prevent heat transfer
- One-piece top includes drain pan with removable perforated insert
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Stainless steel exterior wrap
- 4" deep well liner is 3-5/8" front-to-back
- Designed to hold up to 3-1/2" wide bottles or 1/9th pans
- Installation kit includes: 10' of clear vinyl drain tube, seven - 4" Ty-wraps, one - 1/2" PVC tee, one - 1/2" nylon elbow, and two drainline splicers

### Specifications

#### Drains

- 1/2" welded tailpiece

#### Liner

- 4" deep and 3-3/4" front-to-back

#### Cut-out Dimensions

The unit includes a flange along the back and sides and is designed to install into a notch cut-out in the bar top. If you desire the front of the drain pan to be flush with the bar top, then a 10" deep notch is required with the left-to-right dimension being 1-3/4" less than the outer flange dimension as listed below:

- Model DI-MDR24 - 10" by 22-1/4"
- Model DI-MDR30 - 10" by 28-1/4"
- Model DI-MDR36 - 10" by 34-1/4"

#### Materials

- 22 gauge galvanized steel parts include: exterior wrap and bottom
- 20 gauge stainless steel parts include: interior liner and perforated insert
- 18 gauge stainless steel parts include: top and drain pan


Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	


# Drop-In Mixology Drink Rails

## Dimensional Information


**X = Left-to-right dimension is 24", 30", or 36"**

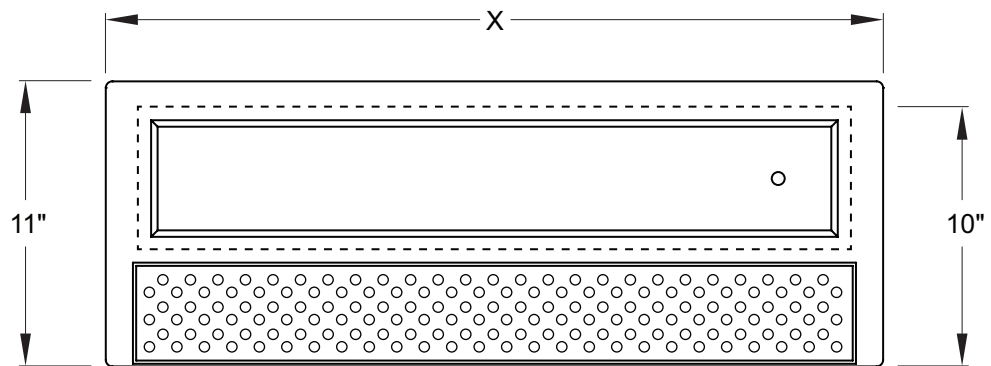

PLAN VIEW

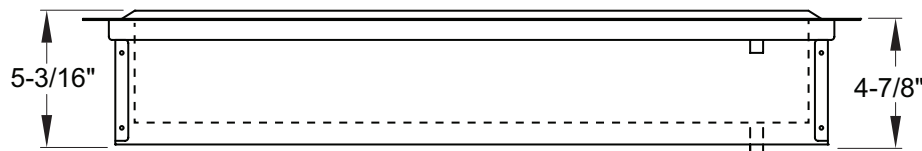

FRONT VIEW




SHOWN WITH DRAIN TUBE CONNECTED

SIDE ELEVATION

## Cut-Out Details

### INSTALLATION INSTRUCTIONS

1. The unit includes a flange along the back and sides and is designed to install into a notch cut-out in the bar top. If you desire the front of the drain pan to be flush with the bar top, then a 10" deep notch is required with the left-to-right dimension being 1-3/4" less than the outer flange dimension.
2. Make initial drain connection, especially if access to drain is limited once the unit is in place.
3. Place unit into appropriate size cut-out for specific model number used.
4. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.

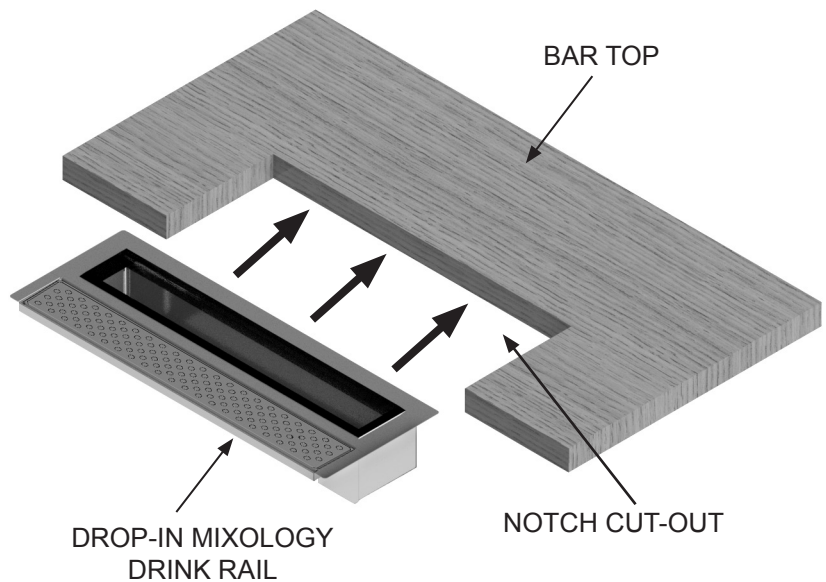

MODEL	X WIDTH =	LEFT-TO-RIGHT CUTOUT
DI-MDR24	24"	22-1/4"
DI-MDR30	30"	28-1/4"
DI-MDR36	36"	34-1/4"