

MI44RF 52-1/4"L x 45-3/4"D x 40-5/8"H
 MI46RF 75"L x 45-3/4"D x 40-5/8"H
 MI48RF 97-3/4"L x 45-3/4"D x 40-5/8"H

Included

- Breeze self-contained refrigeration
- Adjustable wire rack deck
- Casters
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- · Straight insulated glass ends
- Warmest average product temperature adjustable from 0°F to 40°F.
 Low temp for frozen (excluding ice cream) (0°F), Medium temp for raw meat (38°F), Medium temp for produce/deli (40°F)



MI48RF

Specify	Standard Features	Additional Options
EXTERIOR COLOR	Powder coated Silversan Black	Laminate (non-stock colors)
		Laminate (stock colors)
		Powder coated (stock colors, specify RAL#)
		Stainless steel
INTERIOR COLOR	Powder coated Silversan Black	Powder coated Designer White
		Stainless steel
LOWER PANEL COLOR	Powder coated Silversan Black	Stainless steel (must choose stainless exterior)
BASE SUPPORT	Enclosed base with locking casters	
BUMPER	1" bumper, double strip (specify	
	color)	
ELECTRICAL CONNECTION	6' 90° Straight blade power cord	6' Locking power cord (self-cont.)
	(self-cont.)	
THERMOMETER	Digital fahrenheit thermometer	Digital celsius thermometer
MISCELLANEOUS		Second year parts & labor warranty (excludes
		compressor)


Structural Concepts

DELIVERING FRESH. ALWAYS.™


Intende	ded Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.							
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F							
1	Packaged frozen (0°) Packaged raw meat (38°) Packaged produce/deli (40°)-Prechilled. 0-38-40								


EXHAUST AIR EXIT 3" TYP TOE KICK MI44RF CASE FRONT

PLAN VIEW

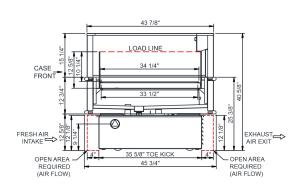

SIDE VIEW

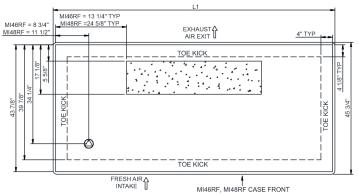



NOTE: ALL DIMENSIONS APPROXIMATE

REFRIGERATION LINE CONNECTION.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

•	LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH $\frac{3}{4}$ " OR 1 $\frac{1}{2}$ " PVC TUBE).



DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wf	
MI44RF	N/A	52.25	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,878	2+G	6-20P or L6-20P	N/A	N/A	N/A	900
MI46RF	N/A	75.00	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,849	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,150
MI48RF	N/A	97.75	.00	Self-Contained (R290)	Circuit #1	208-240	1	60	24.00	4,054	2+G	6-30P or L6-30P	N/A	N/A	N/A	1,500

*** Does not include electric defrost on freezer models.

Regulatory Approvals:						
	Accordance with AHRI Std 1200					
	ETL Listed to UL 471 & UL 60335-2-89					
	ETL Listed to CAN/CSA 22.2 No. 120					







Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Maximum load height is 8-1/4" up from deck.
- 3) Compressor air side intake and side discharge. All louvered panels cannot be blocked

MARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.