





Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

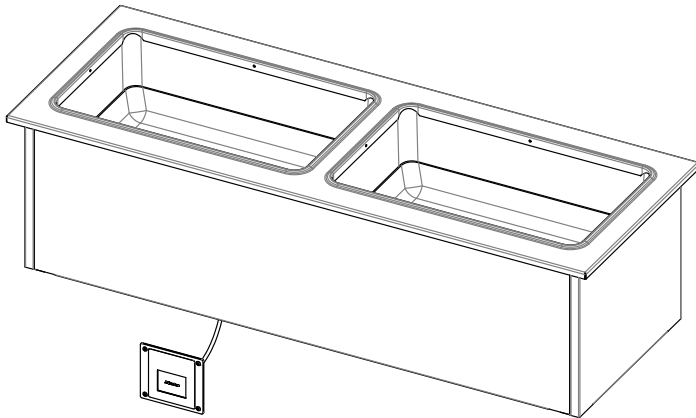

Model WWG2-SL Shown Above



OPTIONS:

- ☐ Hug Edge Top
- ☐ 3 Phase wiring (except WWG1)
- ☐ Designer Foodshields
- ☐ Telescope covers
- ☐ Adapter Plates
- ☐ Adapter Bars

Agency Listings:



NSF/ANSI 4

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1268 Drop In Slimline Ganged Waterless Well

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins - Hot Food

Electric Ganged Waterless Well

- WWG1-SL 24 1/4"L x 17 1/4"W x 12 3/4"H
- WWG2-SL 46 1/4"L x 17 1/4"W x 12 3/4"H
- WWG3-SL 68 1/4"L x 17 1/4"W x 12 3/4"H

BODY:

- Heavy gauge, 300 Series stainless steel top
- Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- Die-stamped openings - 11-7/8" X 19-7/8"

Heat Compartments:

- 6-1/2" deep stainless steel liner for dry operation only
- Includes Silicone bottom pad
- Fully Insulated
- Rope element in each compartment


CONTROLS:

- Standard intuitive, easy to use touch screen control - One control for all wells
- Easily adjusted presets LOW/MED/HIGH
- Built in WIFI and Bluetooth for future connectivity.





EXTERIOR HOUSING:

- Heavy gauge paint grip steel

Specification subject to change



Drop-In Slimline Ganged Waterless Well

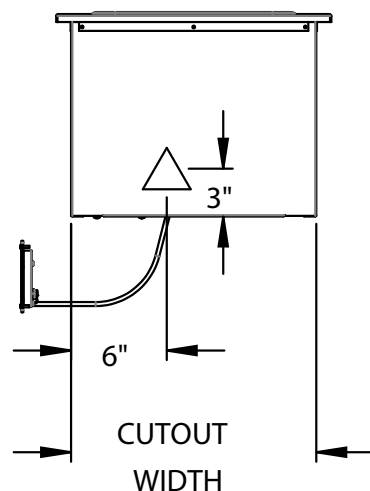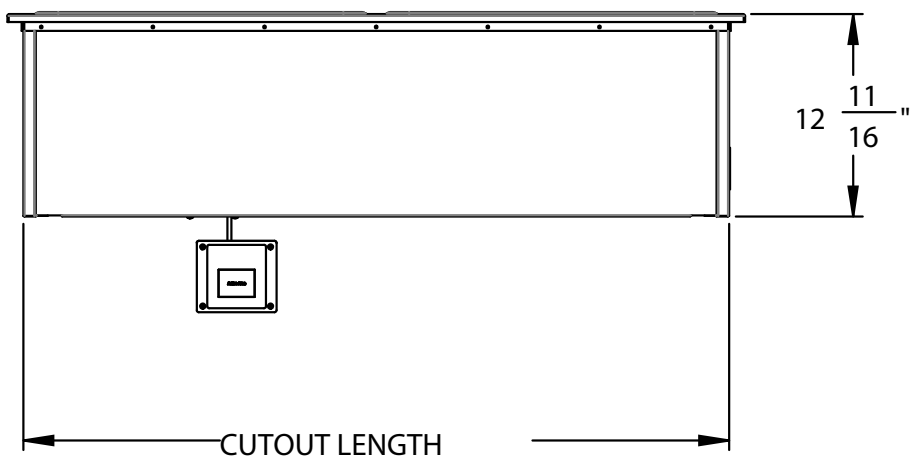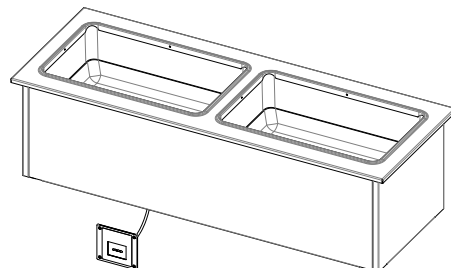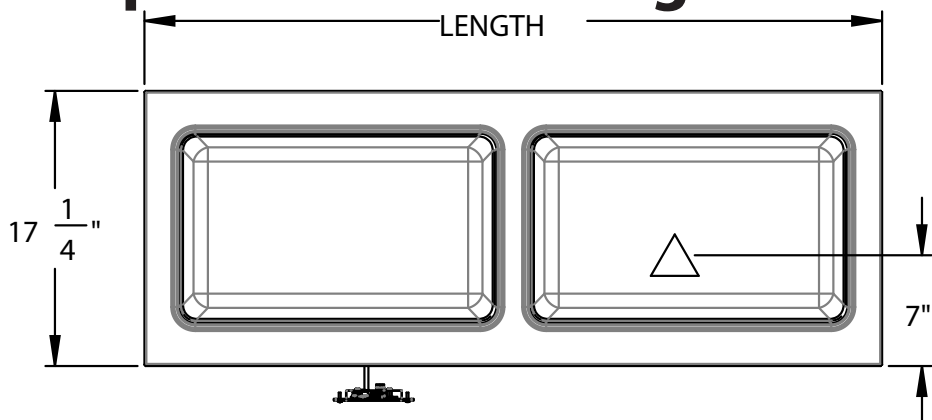

▲ Electrical Connection

DIMENSIONS:


Freight Class: 100

Model	Length		Width		Height		Cutout Length		Cutout Width		Cube ft. Crated	Crated Ship Weight	
	in	cm	in	cm	in	cm	in	cm	in	cm		lbs	kg
WWG1-SL	24.25	61.6	17.25	43.8	12.75	32.4	23.	58.4	16	40.6	7.7	80	36.4
WWG2-SL	46.25	117.5	17.25	43.8	12.75	32.4	45	114.3	16	40.6	13.3	135	61.4
WWG3-SL	68.25	173.3	17.25	43.8	12.75	32.4	67	170.2	16	40.6	19.0	185	84.1


ELECTRICAL SPECIFICATIONS:

Model	120V 665W			208V 500W			240V 665W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
WWG1-SL	749	6.2	5-15	584	2.8	6-20	749	3.1	6-20
WWG2-SL	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20
WWG3-SL	2083	17.4	L5-30	1588	7.6	6-20	2083	8.	6-20

Control Specifications



Control Cutout



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com