

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

MARKETMAX DUAL-TEMP REFRIGERATOR/FREEZER

MMRF72HC White Hinged Triple Glass Door Hydrocarbon Series

MODEL: MMRF72HC-1-C-WW



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable white painted steel
- · Heavy duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- Full electronic control with digital display
- Dual-temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Self-contained bottom mount refrigeration system
- Left: refrigerator double section has double pane lowE glass doors
- Right: freezer single section has triple pane lowE glass door
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- Self-contained bottom mount refrigeration system
- Fifteen (15) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- Leveling feet standard

OPTIONS & ACCESSORIES

- Stainless steel or black exterior option
- Stainless steel or black interior option
- Shelves black or white
- Stainless steel clips
- Flow track
- · Gravity-Flo track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door locks (swing doors only)
- Custom signage & decals
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Refrigerator has non-electric defrost with hot gas condensate evaporation
- Freezer has electric defrost with hot gas condensate evaporation
- Epoxy coated evaporator coil
- Freezer maintains product temperature to -10°F
- Refrigerator maintains product temperatures between 36°F to 38°F





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	MMRF72HC-1-C-WW	
EXTERNAL DIMENSIONAL DATA		
Width Overall	75"	
Depth Overall (with handle)	33 ½"	
Height Overall	78 ⅓ "	
Number of Doors	3	
Depth with Door Open 90 ⁰	55 ¹ ⁄8"	
Door Openings (in)	21 ⁷ ⁄8" x 52 ³ ⁄4"	
INTERNAL DIMENSIONAL DATA		
NET Capacity Refrigerator (cubic ft.)	(F) 44.85 (R) 19.62	
Internal Width Overall (in)	(R) 47" (F) 22"	
Internal Depth Overall (in)	28 ½"	
Internal Height Top Usable (in)	55"	
Number of Shelves	15	
ELECTRICAL DATA		
Full Load Amperes Refrigerator	(R) 3.9 (F) 6.34	
Voltage	115/60/1	
Nema Plug (8' cord)	(2) 5-15P	
REFRIGERATION DATA		
Horsepower	(R) 1/3 (F) 3/4	
Capacity (BTU/Hr)	(R) 2291 (F) 2097	
Heat Rejection (BTU/Hr)	6582	
Charge (lbs/grams/ounces)	(R) .2425 / 110 / 3.88 (F) .2094 / 95 / 3.35	
SHIPPING DATA		
Gross Weight - Crated	842 lbs	
Height - Crated	85"	
Width - Crated	77"	
Depth - Crated	36"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- $1/4^{\rm n}$. Metric dimensions (MM).

Dual-Temp Glass Door Merchandisers

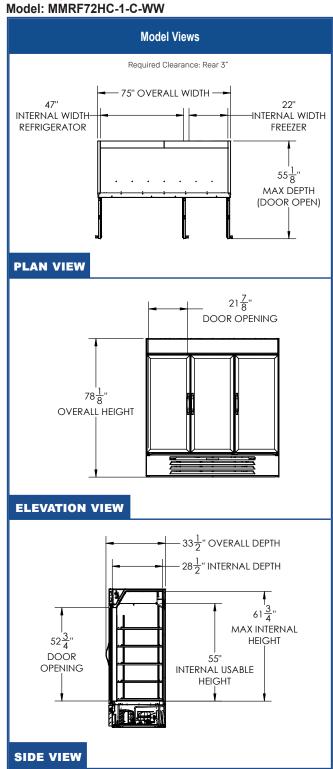

ELECTRICAL CONNECTION



115/60/1 (2) NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.



