

# VUF27A/48A

## Undercounter 27"/48" Freezer

VUF27A/48A  
02/16/26  
Item #13739

VALIANCE<sup>®</sup>

by  HOSHIZAKI

Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

### W x D x H

27" x 30" x 33.75"  
(including 4" casters)

### W x D x H

47.75" x 30" x 33.75"  
(including 4" casters)



VUF27A ★



VUF48A ★



### Dimensions / Capacity

	One Section VUF27A	Two Section VUF48A
<b>Interior Storage Capacity</b> (CF) (AHAM)	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>
<b>Overall Width x Depth</b> (including 1" bumper)	27" x 31.25"	47.75" x 31.25"
<b>Height</b> (including 4" casters)	33.75"	33.75"
<b>Door Opening (W x H)</b>	22.6" x 22.75"	19.5" x 22.75"
<b>Depth with Door Open at 90°</b>	55.75"	52.75"
<b>Adjustable Shelves</b>	1	2
<b>Shelf Dimensions (W x D)</b>	22" x 16"	21.25" x 16"
<b>Crated Shipping Weight</b>	200 lbs.	290 lbs.
<b>Crated Length x Depth x Height</b>	33" x 29" x 37"	52" x 33" x 37"

### Electrical / Refrigeration

	One Section VUF27A	Two Section VUF48A
<b>Voltage</b>	115/60/1	115/60/1
<b>HACR Breaker</b>	15.0 Amps	15.0 Amps
<b>Electrical Connection</b> (NEMA)	5-15P Ⓢ	5-15P Ⓢ
<b>Voltage Range</b>	115-127	115-127
<b>Ambient Temp. Range</b>	45° to 100°F	45° to 100°F
<b>Control Setpoint Range</b>	-5° to 5°F	-5° to 5°F
<b>Amperage</b>	1.2	1.7
<b>Energy Consumption</b> (kWh/day) @ASHRAE	1.92	3.44
<b>Approx. Nominal Compres.</b> BTU/HR (HP)	993(1/5)	1468(1/3)
<b>Refrigerant / Charge Amount</b> (oz.)	R290 / (1.9oz)	R290 / (2.3oz)

### Options

- 6" Casters (set of 4) (HS-5036)
- 2.25" Casters (set of 4) (HS-5037)
- Rearmount undrcntr shelf for 27" (HS-5794)
- Rearmount undrcntr shelf for 48" (HS-5795)
- Single overshelf for 27" (HS-5172)
- Single overshelf for 48" (HS-5173)
- Double overshelf for 27" (HS-5163)
- Double overshelf for 48" (HS-5164)

## FEATURES

- Engineered to maintain NSF-7 temperatures of 100° ambient
- Stainless steel exterior front, sides, and top
- Front breathing air flow design
- Environmentally friendly R290 hydrocarbon refrigerant
- Spring assisted self-closing doors with stay open feature
- Stainless steel exterior doors, sides, and top
- Single section doors are field reversible (no kit needed)
- Stainless steel interior floor with aluminum sides, rear, and top
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 1 per section. 105 lbs. capacity
- Aluminum shelf supports are adjustable in 1/2" increments
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty:  
VUF27A: 88  
VUF48A: 46

### Warranty

- 3 Year - Labor on entire machine.
- 4 Year - Parts on entire machine.
- 5 Year - Parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories.  
Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.


# VUF27A/48A

VALIANCE<sup>®</sup>


by HOSHIZAKI

VUF27A/48A  
02/16/26  
Item #13739

## FRONT VIEW

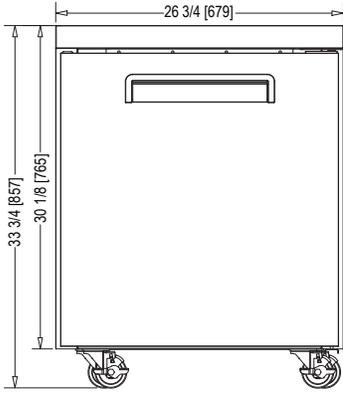


VUF27A

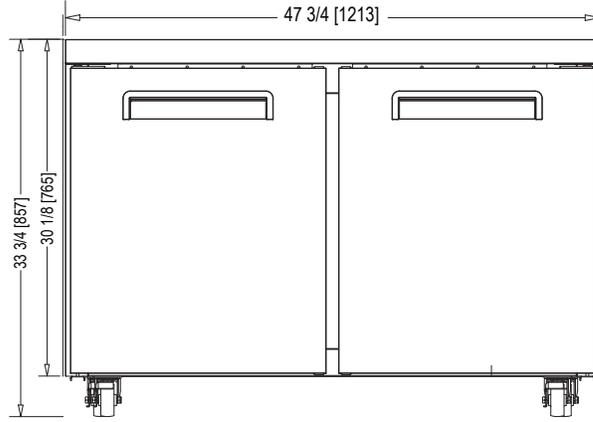


VUF48A

## SIDE VIEW

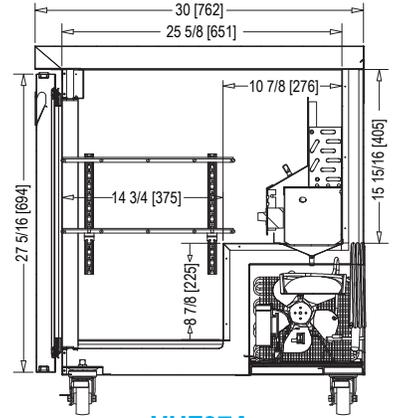


VUF27A

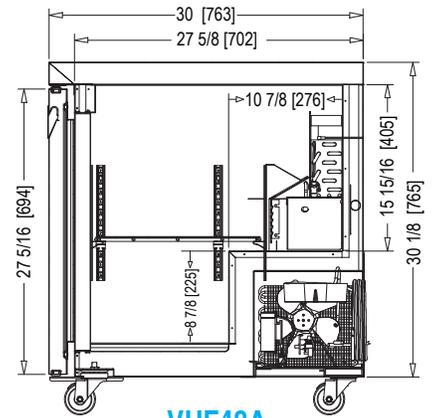


VUF48A

## PLAN VIEW

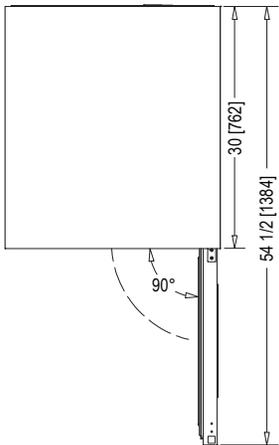


VUF48A

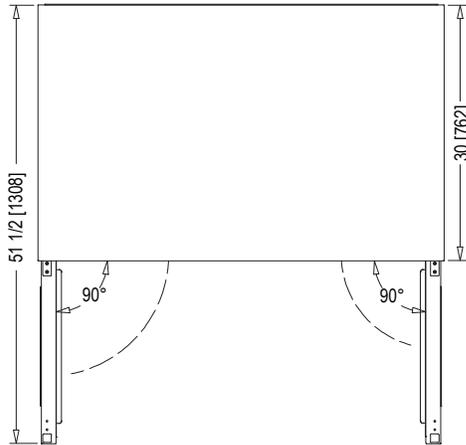


VUF48A

## REAR VIEW

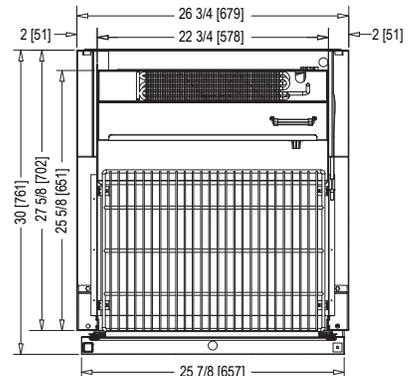

VUF27A

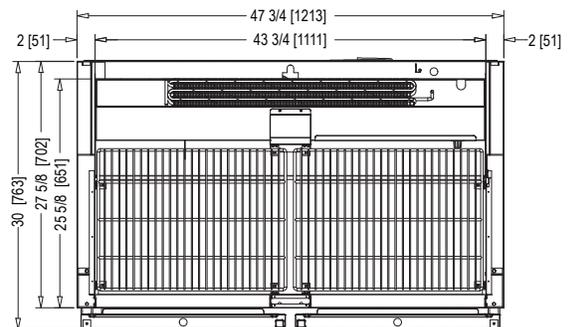

VUF48A