

|                          |            |
|--------------------------|------------|
| Project: _____           | AIA# _____ |
| Item #: _____ Qty: _____ | SIS# _____ |
| Model #: _____           |            |

## Beer Drainers

|           |  |
|-----------|--|
| <b>BD</b> | BDA-18, BDA-24, BDA-30, BDB-36, BDB-18, BDB-24, BDB-30, BDB-36 |
|-----------|--|

### Standard Features

- All stainless steel construction
- Designed with lowered work surface to work in conjunction with undercounter mounting beverage dispensers
- Adjustable stainless steel bullet feet
- Rear deck with tubing chase notch allows beer lines to be installed prior to beer drainer
- Front drain pan with lift-out stainless steel perforated insert



BDB-18  
shown in an installation setting



**Intertek**  
4004503  
Conforms to ANSI/NSF STD 2

### Specifications

**Drain**

- 1/2" welded tailpiece. Clear vinyl drain line is connected to the tailpiece at the factory. A 1/2" by 1/2" barbed plastic elbow is provided to make the connection at the bottom of the unit.

**Legs**

- 1-5/8" diameter, 16 gauge stainless steel
- Stainless steel bullet feet

**Materials**

- 20 gauge stainless steel


Underbar installation instructions: <https://www.glastender.com/support/documents/manuals/underbar-installation-instructions>  
 Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

|   |                 |
|---|-----------------|
| <b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780<br>989.752.4275 • 800.748.0423 • Fax 989.752.4444<br><a href="http://www.glastender.com">www.glastender.com</a> | Approval/Notes: |
| Specifications subject to change without notice. For current specifications please visit our website.   |                 |

# Beer Drainers

## Drawings

### "A" Depth-19" Deep Models

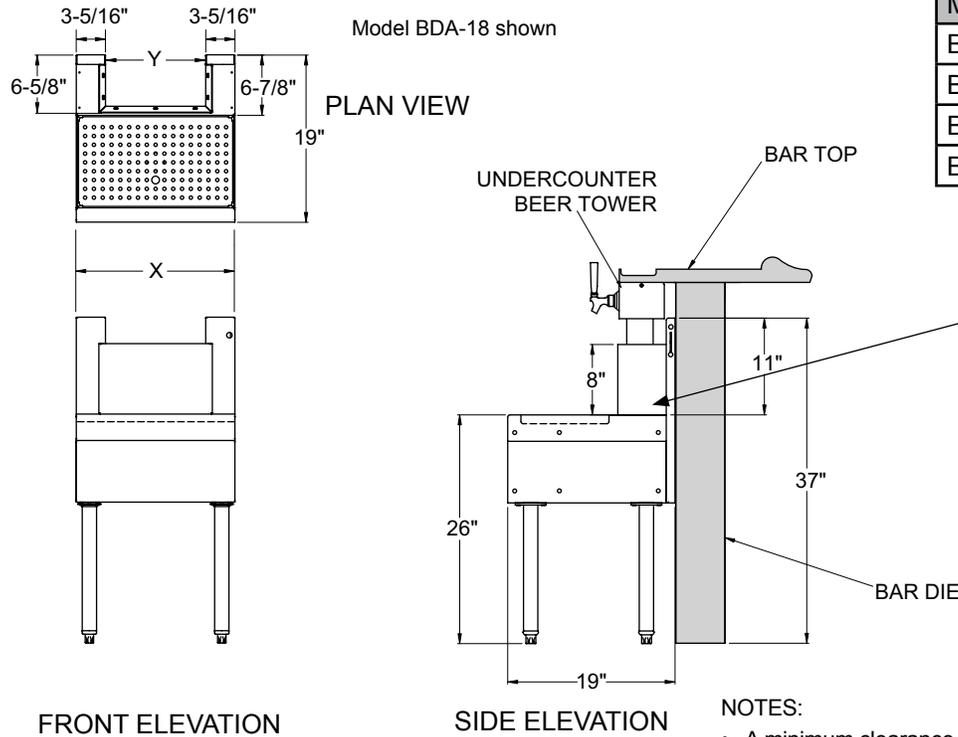


| Model Number | X   | Y       |
|--------------|-----|---------|
| BDA-18       | 18" | 11-3/8" |
| BDA-24       | 24" | 17-3/8" |
| BDA-30       | 30" | 23-3/8" |
| BDA-36       | 36" | 29-3/8" |

When specified along with a Glastender UC model undercounter tower, the front-to-back dimension of the rear chase will be extended if necessary to align the tower properly based on the bar top overhang specified by the customer.

#### NOTES:

- A minimum clearance height below the bar top of 38-1/2" and a minimum 7" bar top overhang is required when BDA or BDB models are used in conjunction with a Glastender UC model undercounter tower.
- The beer drainer must be set in place after the UC model undercounter tower is mounted.
- BDA models will accommodate 7" to 10" deep bar top overhangs.
- BDB models will accommodate 7" to 14" deep bar top overhangs.
- The bar top overhang must be specified when ordered.

### "B" Depth-24" Deep Models

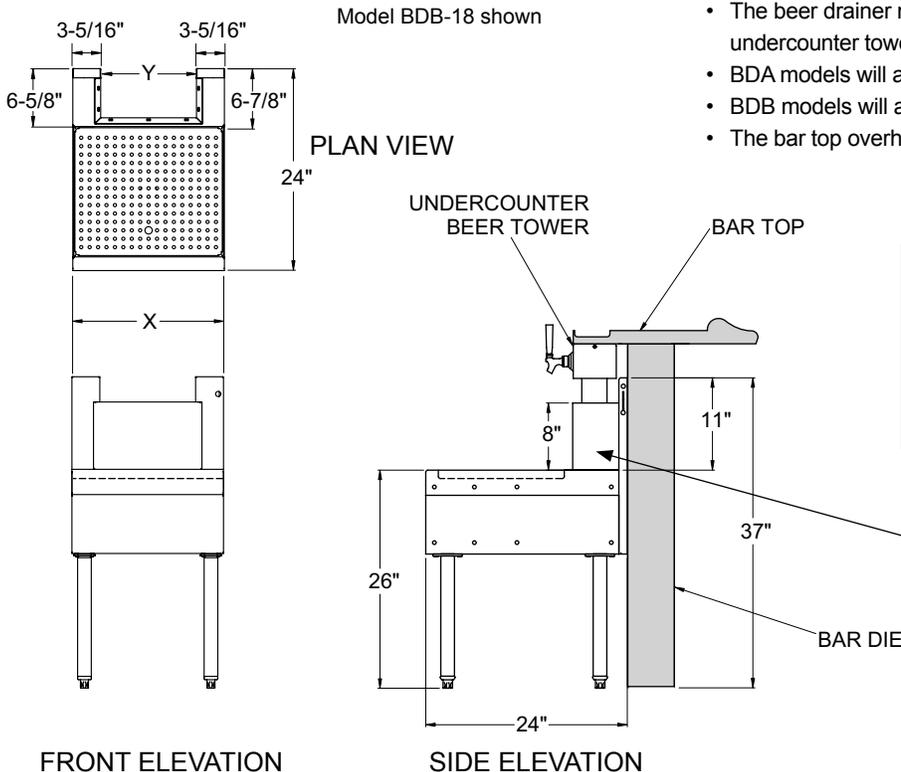

| Model Number | X   | Y       |
|--------------|-----|---------|
| BDB-18       | 18" | 11-3/8" |
| BDB-24       | 24" | 17-3/8" |
| BDB-30       | 30" | 23-3/8" |
| BDB-36       | 36" | 29-3/8" |

When specified along with a Glastender UC model undercounter tower, the front-to-back dimension of the rear chase will be extended if necessary to align the tower properly based on the bar top overhang specified by the customer.

