



ELECTRIC
PROVECTION OVEN

IMPERIAL



PRVE-1

Model Numbers

PRVE-1
PRVE-2
PRVE-3


OVEN FEATURES

- All stainless steel exterior.
- 1/2 HP, 2 speed motor.
- Cool down feature.
- Two low watt density elements for long life.
- 7.5 KW output.
- Removable rack guide assembly.
- Five rack positions.
- Three oven racks included.
- Stainless steel oven door handle.
- Doors with tempered glass windows.
- Two HID oven interior lights with momentary switch.
- Full porcelain interior.
- Stackable up to three units high.
- Can be used as a base for countertop units or built-in as part of Spec and Pro Series ranges.
- Available in 208, 240 and 480 volts.
- Tested to UL197 threshold of 5mg/m3.



ELECTRIC

PROVECTION OVEN

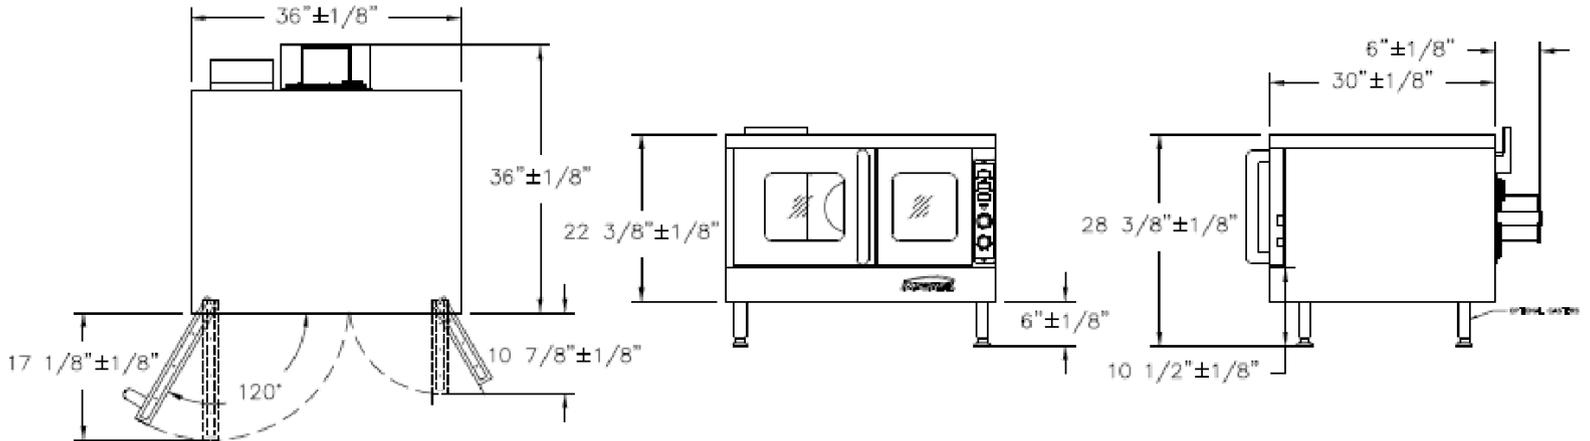

PROVECTION OVENS

MODEL	WIDTH INCHES (MM)	OUTPUT KW	SHIP WEIGHT	
			KG	LBS
PRVE-1	36" (914)	7.5	193	425
PRVE-2	36" (914)	7.5	386	850
PRVE-3	36" (914)	7.5	579	1275

ELECTRICAL REQUIREMENTS PER OVEN				
TOTAL KW	VOLTS	PH	HERTZ	AMPS
7.5	208	1	50/60	40
7.5	208	3	50/60	25
7.5	240	1	50/60	35
7.5	240	3	50/60	22
7.5	480	3	50/60	13

MODEL	DIMENSIONS	CRATED DIMENSIONS
PRVE-1	36" W X 39" D X 21.5" H (914) W X (990) D X (546) H	39" W X 42" D X 24" H (990) W X (1069) D X (610) H
PRVE-2	36" W X 39" D X 43" H (914) W X (990) D X (1092) H	39" W X 42" D X 45" H (990) W X (1069) D X (1143) H
PRVE-3	36" W X 39" D X 64" H (914) W X (990) D X (1626) H	39" W X 42" D X 66" H (990) W X (1069) D X (1676) H

CLEARANCE REQUIREMENTS

Legs or stand required for non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

