

+ HMO3936R
+ HMO5136R
+ HMO7536R
38-3/4"L x 34-1/8"D x 37-3/4"H
50-3/4"L x 34-1/8"D x 37-3/4"H
75-1/8"L x 34-1/8"D x 37-3/4"H

Included

- Breeze self-contained refrigeration
- Clear glass shelves, lighted (LED 3500K)
- Condensate pan (self-contained refrig. only)
- Flat front panel
- Full end panel w/mirror interior
- LED 3500K top & shelf lights
- One year parts & labor; 5 year compressor warranty
- · Open reach-in front
- Upper & lower rear areas white
- Warmest average product temperature of 40°F or less
- 1" Price tag molding (matches interior color)



Specify	Standard Features	Additional Options					
EXTERIOR COLOR	Laminate (stock colors)	Laminate (non-stock colors)					
		Stainless steel					
INTERIOR COLOR	Powder coated Silversan Black	Powder coated Designer White					
		Stainless steel					
REAR EXTERIOR COLOR	Powder coated Designer White	Powder coated Silversan Black					
		Stainless steel (must choose stainless exterior)					
BASE SUPPORT	• Levelers	6"H legs (self-cont.)					
		Casters (self-cont.)					
PRICE TAG MOLDING	• None						
REAR DOORS	None (solid back panel)	Clear glass rear sliding doors w/o lock					
ELECTRICAL CONNECTION	6' Straight blade power cord	6' Locking power cord (self-cont.)					
	(self-cont.)	Electrical leads (remote)					
REFRIGERATION	Breeze self-contained refrigeration	• Remote w/thermostat, solenoid & TXV					
MISCELLANEOUS		Rear door lock					
		Second year parts & labor warranty (excludes					
		compressor)					
ACCESSORIES		• 2"H Display steps					
		Clean Sweep® coil cleaner (self-cont.)					
		Night curtain, retractable, non-locking					
		Removable wire security cover, locking					


Option Notes: 1 - Read important notes for remote options


Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intende	nded Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative hur	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.								
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F								
1	Packaged refrigerated products	40								

PLAN VIEW

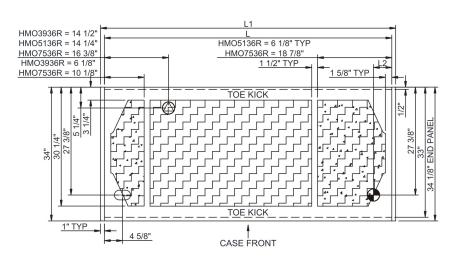



SIDE VIEW

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). LOCATION OF DRAIN TUBE FOR REMOTE REF ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

REFRIGERATION LINE CONNECTION. REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts				Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wf
HMO3936R	36.75	38.75	4.63	Remote (DX)	Circuit #1	110-120	1	60	1.15	95	2+G	Leads Multiple	24.00	2544	2356	650
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.17	1,607	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO5136R	48.75	50.75	4.63	Remote (DX)	Circuit #1	110-120	1	60	1.57	146	2+G	Leads Multiple	20.00	2592	2400	750
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.66	1,633	2+G	5-20P or L5-20P	N/A	N/A	N/A	i l
HMO7536R	73.13	75.13	4.63	Remote (DX)	Circuit #1	110-120	1	60	2.23	210	2+G	Leads Multiple	20.00	3974	3680	950
				Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,890	2+G	6-20P or L6-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models Accordance with AHRI Std 1200

ETL Listed to UL 471

ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF/ANSI 7







Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 3) 35" Minimum door entry clearance required (without shipping skid).
- 4) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and
- 5) Compressor air rear intake, front discharge. Toe kick cannot be blocked.

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.