

- **HMO3936R** 39"L x 34-3/8"D x 37-3/4"H
- **HMO5136R** 51"L x 34-3/8"D x 37-3/4"H
- **HMO7536R** 75-3/8"L x 34-3/8"D x 37-3/4"H

### Included

- Breeze self-contained refrigeration
- Clear glass shelves, lighted (LED 3500K)
- Condensate pan (self-contained refig. only)
- Flat front panel
- Full end panel w/mirror interior
- LED 3500K top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Open reach-in front
- Upper & lower rear areas white
- Warmest average product temperature of 40°F or less




**HMO3936R**

Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Laminate (stock colors)	• Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Powder coated Designer White • Stainless steel
<b>REAR EXTERIOR COLOR</b>	• Powder coated Designer White	• Powder coated Silversan Black • Stainless steel (must choose stainless exterior)
<b>BASE SUPPORT</b>	• Levelers	• 6"H legs (self-cont.) • Casters (self-cont.)
<b>PRICE TAG MOLDING</b>	• None	• 1" Price tag molding (matches interior color)
<b>REAR DOORS</b>	• None (solid back panel)	• Clear glass rear sliding doors w/o lock
<b>ELECTRICAL CONNECTION</b>	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.) • Electrical leads (remote)
<b>REFRIGERATION</b>	• Breeze self-contained refrigeration	<sup>1</sup> • Remote w/thermostat, solenoid & TXV
<b>MISCELLANEOUS</b>		• Rear door lock • Second year parts & labor warranty (excludes compressor)
<b>ACCESSORIES</b>		• 2"H Display steps • Clean Sweep® coil cleaner (self-cont.) • Night curtain, retractable, non-locking • Removable wire security cover, locking


**Option Notes:** 1 - Read important notes for remote options

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.		
<b>Zone</b>	<b>Intended Product To Be Displayed</b>	<b>Warmest Avg Prod Temp ° F</b>
1	Packaged refrigerated products-Prechilled to Warmest Avg Prod Temp.	40

PLAN VIEW

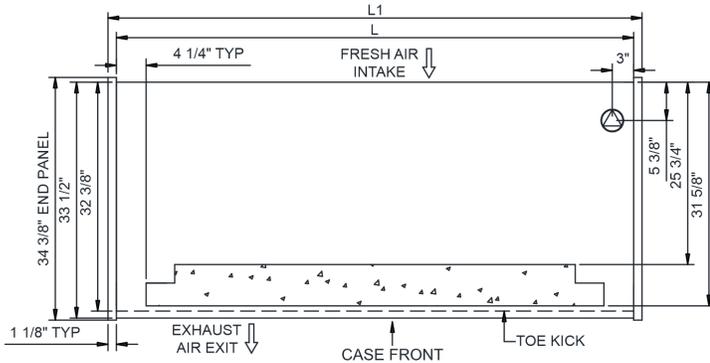

SIDE VIEW

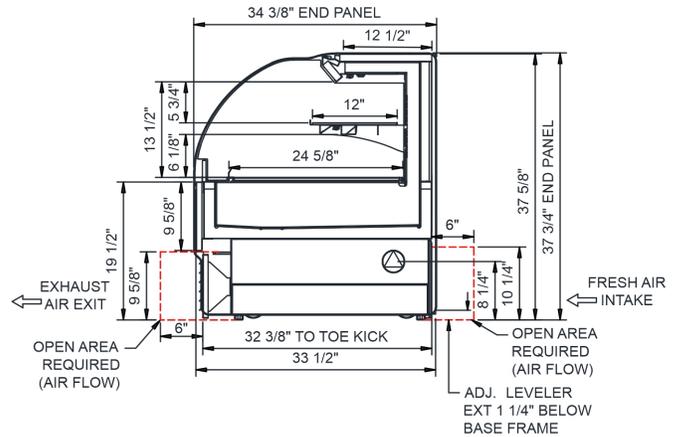

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt	
HMO3936R	36.75	39.00	.00	Remote (DX)	Circuit #1	110-120	1	60	1.15	95	2+G	Leads Multiple	24.00	2544	2356	650
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.17	1,607	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO5136R	48.75	51.00	.00	Remote (DX)	Circuit #1	110-120	1	60	1.57	146	2+G	Leads Multiple	20.00	2592	2400	750
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.66	1,633	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMO7536R	73.13	75.38	.00	Remote (DX)	Circuit #1	110-120	1	60	2.23	210	2+G	Leads Multiple	20.00	3974	3680	950
				Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	2,890	2+G	6-20P or L6-20P	N/A	N/A	N/A	

\*\*\* Does not include electric defrost on freezer models.

**Regulatory Approvals:**

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF/ANSI 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

**Important Notes:**

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 3) 35" Minimum door entry clearance required (without shipping skid).
- 4) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.
- 5) Compressor air rear intake, front discharge. Toe kick cannot be blocked.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).