

- **CGSV3422** 34"L x 18"D x 22"H
- **CGSV4522** 45"L x 18"D x 22"H
- **CGSV5722** 57"L x 18"D x 22"H
- **CGSV6922** 69"L x 18"D x 22"H

Included

- Clear glass swinging doors w/o lock
- Designed for service or self-service applications
- Glass end
- LED top light
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers. Can be angled at 10°, 0° or -10° allowing for service or self-service applications



CGSV4522

Specify	Standard Features	Additional Options
MODEL FINISH	• Powder coated Silversan Black	• Stainless steel
SHELVING	• (1) Upper clear glass shelf, lighted (LED 3500K) and (1) lower shelf, non-lighted	• (2) Clear glass shelves, lighted (LED 3500K)
ELECTRICAL CONNECTION	• 6' Straight blade power cord	• Electrical leads (non-refrigerated)
MISCELLANEOUS		• Second year parts & labor warranty

Impulse

Non-Refrigerated Service/Self-Service Countertop Case - Vertical Front


Structural Concepts®

DELIVERING FRESH. ALWAYS.™


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

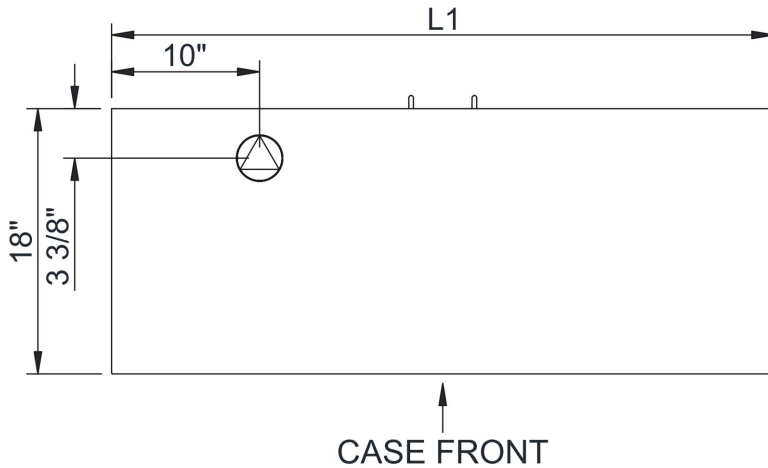

SIDE VIEW

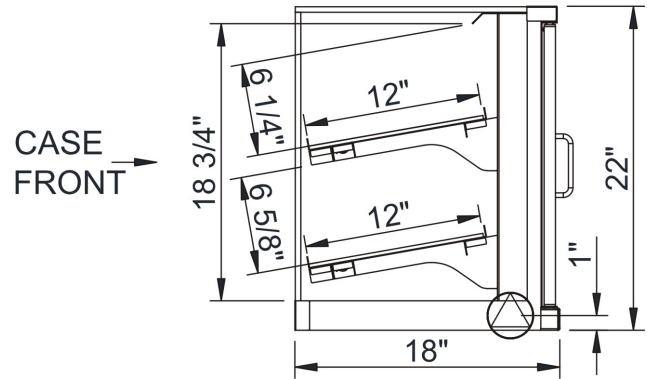

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).
⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
⊞ REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.

⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.
⊞ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
CGSV3422	N/A	34.00	.00	Ambient/Lights (N/A)			1	60	0.70	11	2+G	5-15P	N/A	N/A	N/A	350
CGSV4522	N/A	45.00	.00	Ambient/Lights (N/A)			1	60	0.70	17	2+G	5-15P	N/A	N/A	N/A	375
CGSV5722	N/A	57.00	.00	Ambient/Lights (N/A)			1	60	0.70	21	2+G	5-15P	N/A	N/A	N/A	400
CGSV6922	N/A	69.00	.00	Ambient/Lights (N/A)			1	60	0.70	26	2+G	5-15P	N/A	N/A	N/A	425

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models ETL Listed to UL 65
ETL Sanitation to NSF/ANSI 2



DOE 2017
Energy Efficiency
Compliant

Important Notes:

1) Electrical Note: If GFCI is required, a GFCI breaker Must be used in lieu of a GFCI receptacle.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.