

Refrigerated Display Case with Four-Sided Glass

ITEM:	44471	44472	44473	44474
MODEL:	RS-CN-0270-L	RS-CN-0350	RS-CN-0400-T	RS-CN-0550



44472
33" Wide / 59" Tall

44474
33" Wide / 75" Tall



44471
26" Wide / 59" Tall


44473
26" Wide / 75" Tall

Attractively display food merchandise and increase impulse sale with product visibility.

Omcan's Refrigerated Display Case with four-sided glass offers an economical and effective solution for showcasing your products. It features brilliant internal LED illumination on the sides to enhance visibility and a durable stainless steel exterior for a sleek, professional look. The unit includes adjustable chrome-plated shelves to accommodate a variety of items, as well as a digital temperature controller and display for precise cooling management. The front flat glass door and four-sided double glass design provide excellent product visibility. Additionally, the ventilated cooling system ensures even air distribution, while the automatic defrost function simplifies maintenance.

FEATURES:

- Brilliant internal LED illumination
- Digital temperature controller & display
- Adjustable chrome plated shelves
- Four-sided double glass
- Front flat glass door
- Automatic defrost
- Ventilated cooling system
- Stainless steel




TECHNICAL SPECIFICATION


Features	26" Wide - 59" Tall with 270L capacity	26" Wide- 75" Tall with 400L capacity	33" Wide- 59" Tall with 350L capacity	33" Wide- 75" Tall with 550L capacity
Item	44471	44473	44472	44474
Model	RS-CN-0270-L	RS-CN-0400-T	RS-CN-0350	RS-CN-0550
Capacity:	270 L / 9.53 cu. ft.	400 L / 14.13 cu. ft.	350 L / 12.36 cu. ft.	550 L / 19.42 cu. ft.
Number of Shelves:	2	3	2	3
Shelve Size:	17.8" x 20.3"	17.8" x 20.3"	25.7" x 20.3"	25.7" x 20.3"
Rated Current	2.8 A	2.8 A	2.8 A	2.8 A
Power:	475 W	495 W	640 W	500 W
Lamp Power	10 W	16.8 W	10 W	16.8 W
Electrical:	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph
Temperature Range:	2°C - 10°C / 35.6°F - 50°F	2°C - 10°C / 35.6°F - 50°F	2°C - 10°C / 35.6°F - 50°F	2°C - 10°C / 35.6°F - 50°F
Refrigerant & Injection:	R290 & 110g	R290 & 110g	R290 & 110g	R290 & 110g
Blowing Gas	C5H10	C5H10	C5H10	C5H10
Weight:	308.6 lbs / 140 kg	385.8 lbs / 175 kg	335 lbs / 152 kg	423.3 lbs / 192 kg
Gross Weight:	363.76 lbs / 165 kg	452 lbs / 205 kg	399 lbs / 181 kg	500 lbs / 227 kg
Dimensions (WDH):	25.6" x 25.6" x 59"	25.6" x 25.6" x 75"	33.46" x 25.6" x 59"	33.46" x 25.6" x 75"
Gross Dimensions (WDH):	29.5" x 29.5" x 65"	29.5" x 29.5" x 81"	37.36" x 37.36" x 65"	37.36" x 29.5" x 81"

TECHNICAL DRAWING


44471 - 26" Wide / 59" Tall

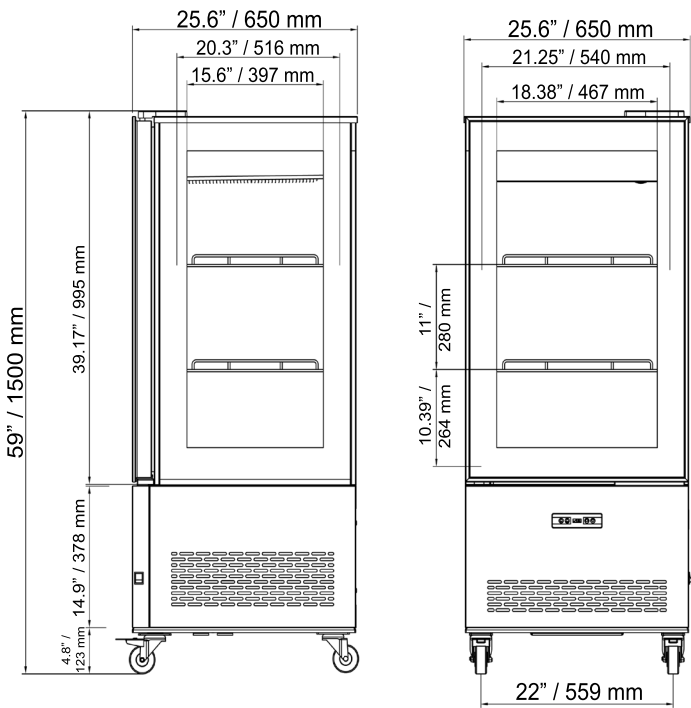

44473 - 26" Wide / 75" Tall

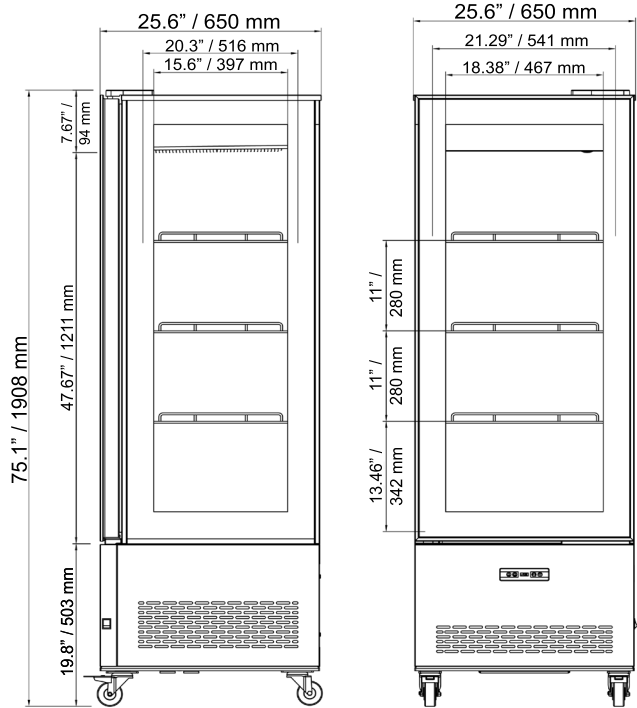

44472 - 33" Wide / 59" Tall

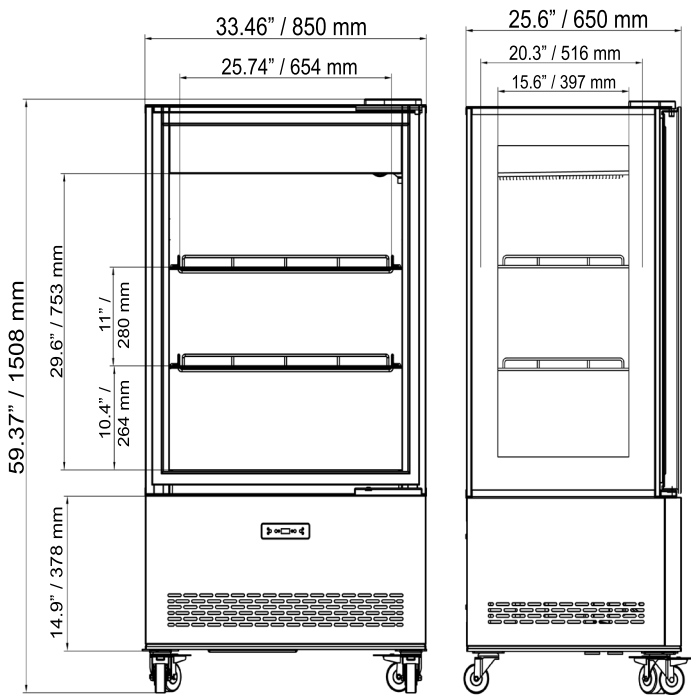

44474 - 33" Wide / 75" Tall

