





A family company manufacturing in the USA

www.glastender.com



DI-FR-DW

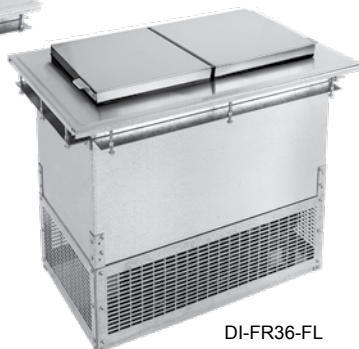

DI-FR36-FL



Intertek

EP 5016978
Energy Performance
Verified / Rendement
Énergétique Vérifié



Intertek

4004503
Conforms to NSF/ANSI STD 7
and UL STD 471
Certified to CSA STD C22.2 No. 120



Intertek



**All faucets are NSF/ANSI 372
low lead compliant**

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Ice Cream Freezers

DI-FR

DI-FR, DI-FR-DW, DI-FR36, DI-FR36-FL,
DI-FR36-DW or DI-FR36-DW-FL

Standard Features

- Stainless steel work surface, lid, and interior liner with galvanized steel exterior wrap
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Available with integral 6" diameter draining dipper well and faucet
- Eight foot grounded cord and plug provided
- Available sizes for one or two 3-gallon containers
- Refer to reverse side for mounting instructions
- Special angle brackets, U-channels, and mounting bolts provided for easy installation and allows unit to be removed if necessary

NOTE: The standard top lifts up and the special hinges allow the lid to remain open while dipping. A special "flip lid" is available on the models that hold two 3-gallon containers. The flip lid is hinged in the middle and opens from each end. The flip lid models are specified with the suffix '-FL' on the end of the model number.

Specifications

Drains

- 1-1/2" I.P.S. (when ordered with dipper well). Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.

Faucet

- Accepts 3/8" cold water leads (when ordered with dipper well)

Capacities

- DI-FR models holds one 3-gallon container
- DI-FR36 models holds two 3-gallon containers

Product Storage Clearance Dimensions

- DI-FR - 10-1/16" x 10-1/16" x 12-1/4"H
- DI-FR36 - 10-1/16" x 20-1/16" x 12-1/4"H

Electrical

- 120V, 1 phase, 60 Hz, 3.5 full load amps
- Dedicated 15 amp circuit is recommended
- Includes 8 foot NEMA 5-15P grounded cord and plug



5-15P

Refrigeration


- 1/4 HP, 0.06 Ton, R290 100g (3.53 oz)
- 1,433 BTU/hr heat rejection

Operating Range

- -5°F (-20°C) to 10°F (-12°C)

Materials

- Stainless steel parts include: work surface, interior liner, lid, and dipper well
- Galvanized steel parts include: exterior wrap and condensing unit base plate

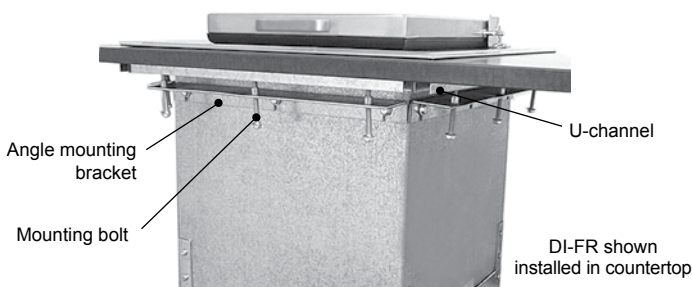

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:


Drop-In Ice Cream Freezers

Dimensional Information

PLAN VIEWS

<p>CUT-OUT DIMENSION 14-3/4" X 14-3/4"</p> <p>18" 14" AIR FLOW 14" 18" MINIMUM 5" CLEARANCE FOR AIR FLOW AROUND ALL SIDES</p> <p>DI-FR</p>	<p>CUT-OUT DIMENSION 22-3/4" X 14-3/4"</p> <p>24" 14" AIR FLOW 14" 18" MINIMUM 5" CLEARANCE FOR AIR FLOW AROUND ALL SIDES</p> <p>DI-FR-DW</p>	<p>CUT-OUT DIMENSION 24-3/4" X 14-3/4"</p> <p>28" 24" AIR FLOW 14" 18" MINIMUM 5" CLEARANCE FOR AIR FLOW AROUND ALL SIDES</p> <p>DI-FR36 DI-FR36-FL</p>	<p>CUT-OUT DIMENSION 32-3/4" X 14-3/4"</p> <p>34" 24" AIR FLOW 14" 18" MINIMUM 5" CLEARANCE FOR AIR FLOW AROUND ALL SIDES</p> <p>DI-FR36-DW DI-FR36-DW-FL</p>
<p>23" 14"</p>	<p>6-1/4" DRAIN 14"</p>	<p>23" 24"</p>	<p>6-1/4" DRAIN 24"</p>

FRONT VIEWS

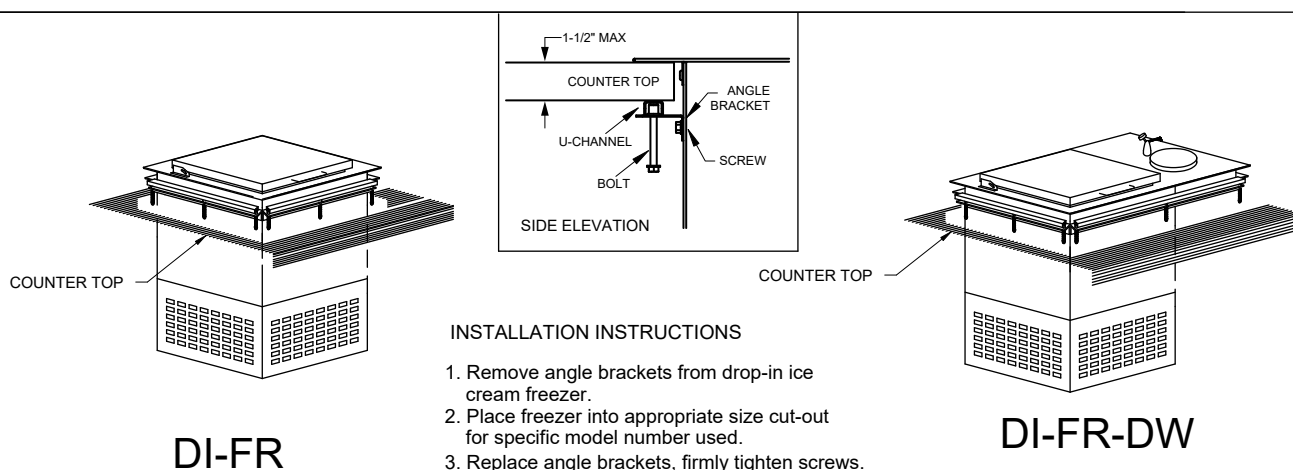

INSTALLATION INSTRUCTIONS

1. Remove angle brackets from drop-in ice cream freezer.
2. Place freezer into appropriate size cut-out for specific model number used.
3. Replace angle brackets, firmly tighten screws.
4. Place U-channels on top of bolts.
5. Tighten each bolt evenly along U-channels.
6. Seal as necessary.

NOTE: THIS UNIT REQUIRES PROPER VENTILATION. AIR FLOW RESTRICTIONS AND/OR LACK OF VENTILATION OF CABINET SPACE WILL CAUSE COMPRESSOR FAILURE AND WILL VOID WARRANTY. CONDENSER NEEDS 150 CFM OF SUPPLY AIR TO MAINTAIN PROPER OPERATION.