

# DESIGNER LINE DISPLAY REFRIGERATOR

## Model: **D2RSNSGD**

Natural Refrigerant R-290 Model

*Designer line*

### 2-Section Display Reach-In Refrigerator with Sliding Glass Doors - Shallow Depth

**D2RSNSGD** - Stainless steel front, aluminum end panels and interior

**D2RSNSASGD** - Stainless steel exterior, aluminum interior

**D2RSNSSGD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

|                                       |                                           |
|---------------------------------------|-------------------------------------------|
| Stainless steel case back             | Wine rack                                 |
| Additional epoxy coated steel shelves | Casters                                   |
| Chrome or stainless steel shelves     | Special electrical req. (consult factory) |

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system (coil in the cabinet zone)

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

Expansion valve system

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Double-pane, tempered sliding glass doors

Snap in door wiper

Door lock

Self closing door

Heavy duty, epoxy coated steel shelves

Heavy-duty pilaster strips

Adjustable 6" stainless steel legs

### MODEL FEATURES

LED interior lighting

Electronic control, off cycle defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                              |                                          |
|----------------------------------------------|------------------------------------------|
| Net Capacity (cubic feet)                    | 32 (813 l)                               |
| Width, Overall (inches)                      | 52 (1321 mm)                             |
| Depth, Overall (inches) (including grill)    | 27 <sup>7</sup> / <sub>8</sub> (708 mm)  |
| Depth (inches) (less grill)                  | 25 <sup>7</sup> / <sub>8</sub> (657 mm)  |
| Clear Door Width (inches)                    | 17 <sup>3</sup> / <sub>4</sub> (451 mm)  |
| Clear Door Height (inches)                   | 54 <sup>3</sup> / <sub>4</sub> (1391 mm) |
| Height, Overall (inches) (including 6" legs) | 83 <sup>1</sup> / <sub>4</sub> (2115 mm) |
| Number of Doors                              | 2                                        |
| Number of Shelves                            | 8                                        |
| Shelf Area (square feet)                     | 40.8 (3.8 sq m)                          |

### REFRIGERANT DATA

|                             |                             |
|-----------------------------|-----------------------------|
| Condensing Unit Size (H.P.) | <sup>1</sup> / <sub>3</sub> |
| Capacity (BTU per hour)*    | 2940                        |

### ELECTRICAL DATA

|                                             |                     |
|---------------------------------------------|---------------------|
| Voltage (International)                     | 115/60/1 (220/50/1) |
| Feed Wires (including ground)               | 3                   |
| Total Amps (International)                  | 8.4 (5.1)           |
| 10 ft. Cord/Plug [attached] (International) | Yes (No)            |

### SHIPPING DATA

|                              |                                          |
|------------------------------|------------------------------------------|
| Height - Crated (inches)     | 85 <sup>1</sup> / <sub>2</sub> (2172 mm) |
| Width - Crated (inches)      | 64 (1626 mm)                             |
| Depth - Crated (inches)      | 42 (1067 mm)                             |
| Volume - Crated (cubic feet) | 133 (3766 cu l)                          |
| Weight Std - Crated (pounds) | 470 (214 kg)                             |
| Weight SS - Crated (pounds)  | 550 (250 kg)                             |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

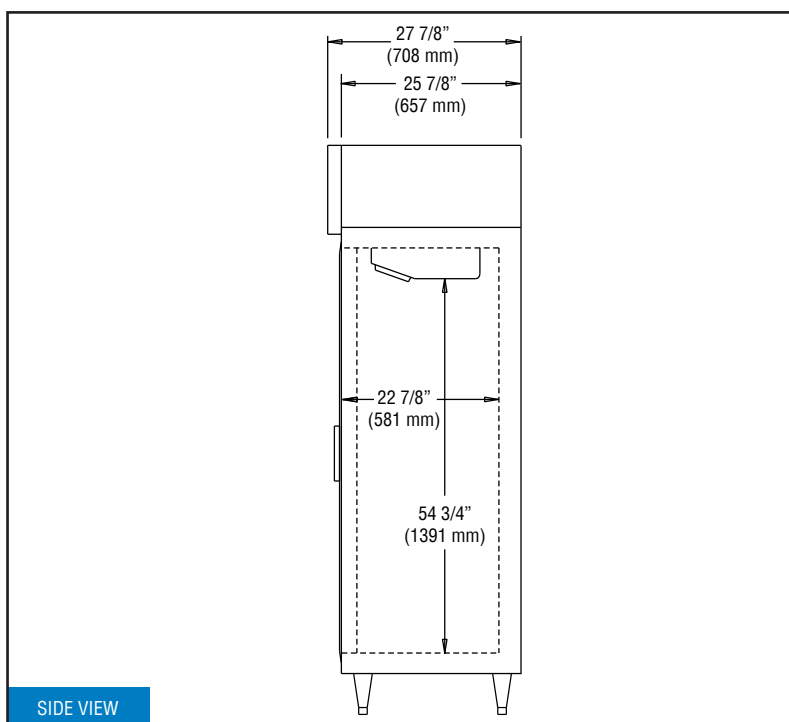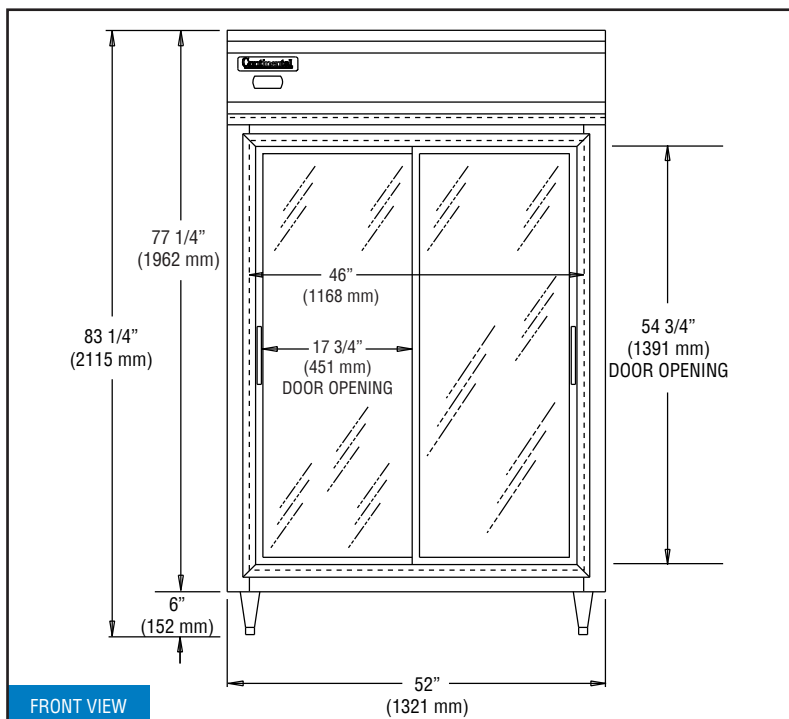

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

REVISED: 9/18/25