

"PTS1" PASS-THROUGH SHELVES

Single Tier, 16GA

FEATURES:

- 16GA Stainless Steel Hat Channel Allows Shelf To Be Freely Positioned In Field
- Includes Wall Mount Brackets To Securely Fasten Shelf To Wall
- Furnished With Stallion Edge Turned Down 1-1/2" 90 Degrees And 1/2" Back 45 Degrees Along Front And Rear
- Ends Are Square Turned Down 1-1/2" At Wall

SPECIFICATIONS:

- All TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- 16GA Type 300 Stainless Steel

CERTIFICATIONS:





PTS16K-2460

"PTS1" SINGLE PASS-THROUGH SHELVES

LENGTH	12" WIDTH	A	WT (LBS)	18" WIDTH	A	WT (LBS)	24" WIDTH	A	WT (LBS)
24"	PTS16K-1224	4-3/4"	13	PTS16K-1824	10"	16	PTS16K-2424	7-1/2"	18
36"	PTS16K-1236	4-3/4"	20	PTS16K-1836	10"	23	PTS16K-2436	7-1/2"	27
48"	PTS16K-1248	4-3/4"	26	PTS16K-1848	10"	31	PTS16K-2448	7-1/2"	36
60"	PTS16K-1260	4-3/4"	33	PTS16K-1860	10"	39	PTS16K-2460	7-1/2"	45
72"	PTS16K-1272	4-3/4"	39	PTS16K-1872	10"	46	PTS16K-2472	7-1/2"	54
84"	PTS16K-1284	4-3/4"	46	PTS16K-1884	10"	54	PTS16K-2484	7-1/2"	63
96"	PTS16K-1296	4-3/4"	52	PTS16K-1896	10"	62	PTS16K-2496	7-1/2"	72
108"	PTS16K-12108	4-3/4"	59	PTS16K-18108	10"	70	PTS16K-24108	7-1/2"	81
120"	PTS16K-12120	4-3/4"	65	PTS16K-18120	10"	77	PTS16K-24120	7-1/2"	89
132"	PTS16K-12132	4-3/4"	72	PTS16K-18132	10"	85	PTS16K-24132	7-1/2"	98
144"	PTS16K-12144	4-3/4"	78	PTS16K-18144	10"	93	PTS16K-24144	7-1/2"	107

ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

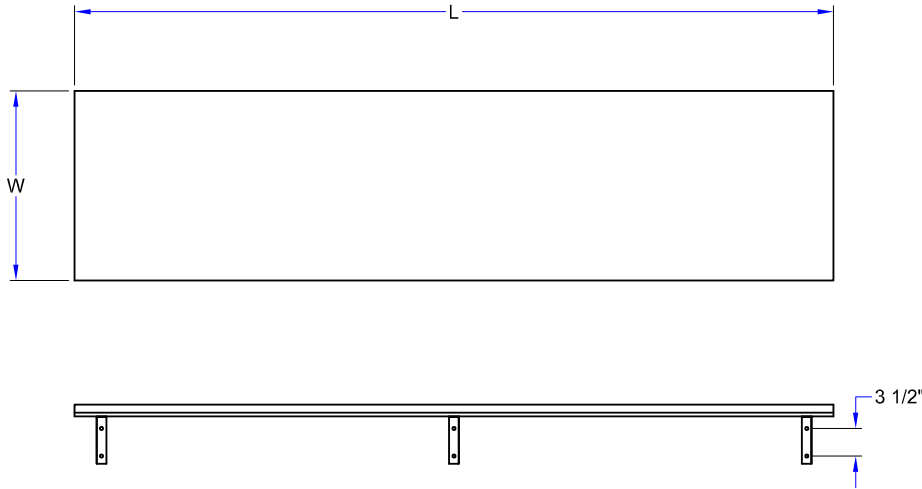

"PTS1" SINGLE PASS-THROUGH SHELVES

LENGTH	12" WIDTH	A	WT (LBS)	18" WIDTH	A	WT (LBS)	24" WIDTH	A	WT (LBS)
24"	PTS16K-1224	4-3/4"	13	PTS16K-1824	10"	16	PTS16K-2424	7-1/2"	18
36"	PTS16K-1236	4-3/4"	20	PTS16K-1836	10"	23	PTS16K-2436	7-1/2"	27
48"	PTS16K-1248	4-3/4"	26	PTS16K-1848	10"	31	PTS16K-2448	7-1/2"	36
60"	PTS16K-1260	4-3/4"	33	PTS16K-1860	10"	39	PTS16K-2460	7-1/2"	45
72"	PTS16K-1272	4-3/4"	39	PTS16K-1872	10"	46	PTS16K-2472	7-1/2"	54
84"	PTS16K-1284	4-3/4"	46	PTS16K-1884	10"	54	PTS16K-2484	7-1/2"	63
96"	PTS16K-1296	4-3/4"	52	PTS16K-1896	10"	62	PTS16K-2496	7-1/2"	72
108"	PTS16K-12108	4-3/4"	59	PTS16K-18108	10"	70	PTS16K-24108	7-1/2"	81
120"	PTS16K-12120	4-3/4"	65	PTS16K-18120	10"	77	PTS16K-24120	7-1/2"	89
132"	PTS16K-12132	4-3/4"	72	PTS16K-18132	10"	85	PTS16K-24132	7-1/2"	98
144"	PTS16K-12144	4-3/4"	78	PTS16K-18144	10"	93	PTS16K-24144	7-1/2"	107

ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.