

HMG3953R
HMG5153R
HMG6353R
38-3/4"L x 34-1/8"D x 53"H
50-3/4"L x 34-1/8"D x 53"H
62-5/8"L x 34-1/8"D x 53"H

Included

- Breeze self-contained refrigeration
- Clear glass shelves, lighted (LED 3500K)
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refrig. only)
- Curved double pane, lift-up front glass w/o lock
- Flat front panel
- LED 3500K top & shelf lights
- One year parts & labor; 5 year compressor warranty
- Shelving removable and adjustable on 1" centers
- Warmest average product temperature of 40°F or less




Specify	Standard Features	Additional Options						
EXTERIOR COLOR	Laminate (stock colors)	Laminate (non-stock colors)						
		Stainless steel						
INTERIOR COLOR	Powder coated Silversan Black	Powder coated Designer White						
		Stainless steel						
REAR EXTERIOR COLOR	Powder coated Designer White	Powder coated Silversan Black						
		Stainless steel (must choose stainless exterior)						
BASE SUPPORT	• Levelers	6"H legs (self-cont.)						
		Casters (self-cont.)						
END PANELS	Full w/stainless steel mirror interior	Cutaway w/glass						
PRICE TAG MOLDING	• None	1" Price tag molding (matches interior color)						
REAR DOORS	Clear glass rear sliding doors w/o	Reflective glass rear sliding doors w/o lock						
	lock							
ELECTRICAL CONNECTION	6' Straight blade power cord	6' Locking power cord (self-cont.)						
	(self-cont.)	Electrical leads (remote)						
REFRIGERATION	Breeze self-contained refrigeration	¹ • Remote w/thermostat, solenoid & TXV						
MISCELLANEOUS		Front glass lock						
		Rear door lock						
		Second year parts & labor warranty (excludes						
		compressor)						
ACCESSORIES		Clean Sweep® coil cleaner (self-cont.)						

Option Notes: 1 - Read important notes for remote options

Intende	ed Environment:	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.								
Zone	Intended Product To I	Be Displayed	Warmest Avg Prod Temp ° F							
1	Unpackaged refrigera	ted products	40							

PLAN VIEW SIDE VIEW

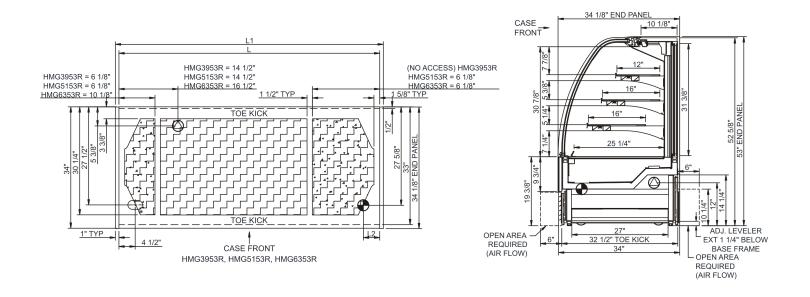

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REFRIGERATION LINE CONNECTION.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	. L1"	L2"	System Circuit Volts			Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wf
HMG3953R	36.75	38.75	4.75	Remote (DX)	Circuit #1	110-120	1	60	1.35	141	2+G	Leads Multiple	20.00	1793	1660	850
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.32	1,624	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMG5153R	48.75	50.75	4.75	Remote (DX)	Circuit #1	110-120	1	60	2.31	236	2+G	Leads Multiple	20.00	1944	1800	950
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.84	1,654	2+G	5-20P or L5-20P	N/A	N/A	N/A	
HMG6353R	60.63	62.63	4.75	Remote (DX)	Circuit #1	110-120	1	60	2.69	248	2+G	Leads Multiple	20.00	2290	2120	1,150
				Self-Contained (R290)	Circuit #1	110-120	1	60	15.92	1,664	2+G	5-20P or L5-20P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals: All Models

Accordance with AHRI Std 1200 ETL Listed to UL 471

ETL Listed to CAN/CSA 22.2 No. 120

ETL Sanitation to NSF/ANSI 7







Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 3) 35" minimum door entry clearance required (without shipping skid).
- 4) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.