

WORKTOP FREEZER (0°F)

Model: SWF48NBS-D

Natural Refrigerant R-290 Model

48" Worktop Freezer with Drawers and 5½" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)

| | |
|--------------------------------|---|
| Stainless steel interior | Different caster sizes |
| Stainless steel back | Adjustable legs |
| Overshelves (single or double) | Drawer locks |
| Expansion valve system | Special electrical requirements (consult factory) |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer handles

Stainless steel roll out drawers

Magnetic snap in Santoprene™ drawer gaskets

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Electronic control, automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|--|
| Net Capacity (cubic feet) | 13.4 (379 l) |
| Width, Overall (inches) | 48 (1219 mm) |
| Depth, Overall (inches) (including handles & bumpers) | 32 ³ / ₁₆ (818 mm) |
| Height, Overall (inches) (including 5" casters) | 40 ³ / ₄ (1035 mm) |
| Number of Drawers (two tier) | 4 |

REFRIGERANT DATA

| | |
|-------------------------------|------|
| Condensing Unit Size (H.P.) | 1/2 |
| R-290 Refrigerant Charge (oz) | 4.06 |
| Capacity (BTU per hour)* | 1980 |

ELECTRICAL DATA

| | |
|--|---------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Total Amps (International) | 6.0 (3.0) |
| Defrost Amps (International) | 4.4 (2.2) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| | |
|--------------------------|--|
| Weight (pounds) | 350 (159 kg) |
| Height - Crated (inches) | 48 ³ / ₄ (1238 mm) |
| Width - Crated (inches) | 56 (1422 mm) |
| Depth - Crated (inches) | 37 ¹ / ₄ (946 mm) |

DRAWER PAN CONFIGURATIONS



Two Tier: (1) 12 x 18 x 6 pan per drawer
or (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

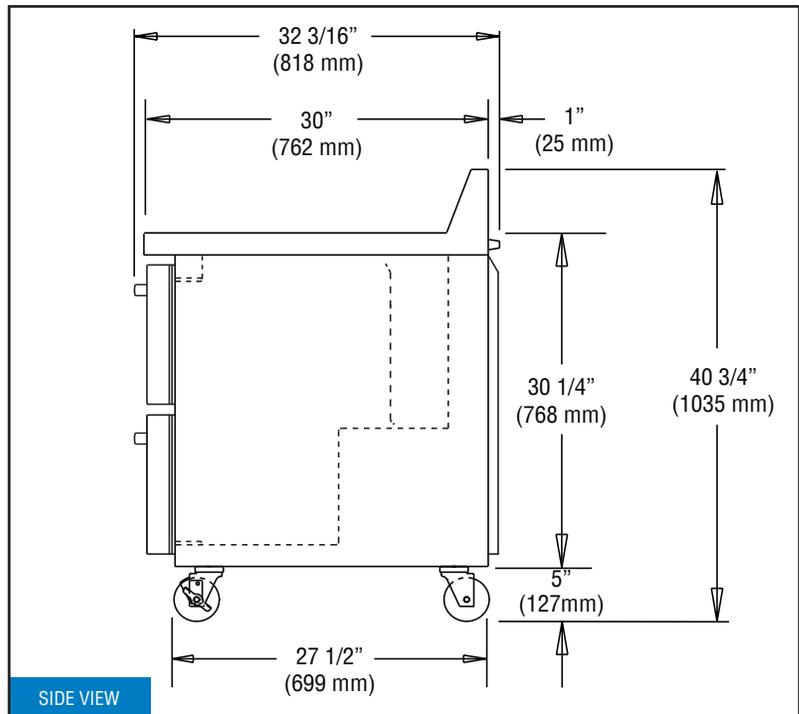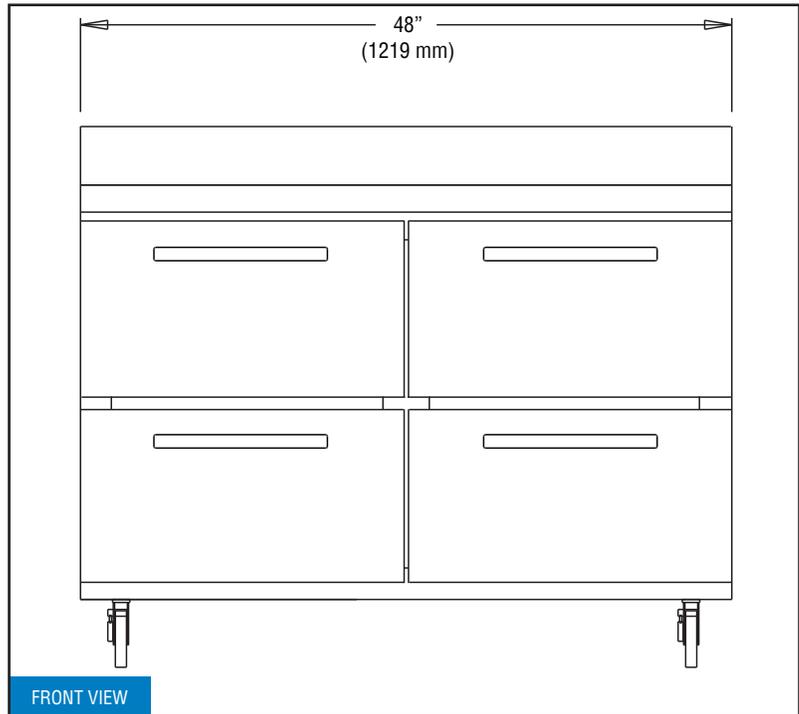

IMPORTANT NOTE: If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.