

Project		
AIA #	SIS#	
Item#	Quantity	C.S.I. Section 114000

# **R Series**

30" Wide Reach-In Freezer 32" Deep, Self-Contained











Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

# **AVAILABLE CONFIGURATIONS**

R Series Models

RLT132WUT-FHS RLT132WUT-HHS Door(s)

Full Height Solid Half Height Solid

\*Remote application without R-290 refrigerant available, see form TR35837 for details.

# STANDARD PRODUCT FEATURES

- Stainless Steel Exterior & Interior
- Variable Speed Compressor Adapts to the Work Environment
- Traulsen's Smart Control with LED Display
- -10°F Capable in up to 100°F Ambient
- StayClear™ Condenser Coil
- Balanced, Self-Contained Refrigeration System Using R-290
- Full or Half-Height Stainless Steel Door(s) with Lock(s)
- Anti-Condensate Door Perimeter Heater
- Self-Closing Door with Stay Open Feature
- Standard Door Hinging: 132W = Right (other hingings available)
- Automatically Activated LED Lights
- Stainless Steel Breaker Caps
- Three Adjustable, Coated Wire Shelves Per Section, Supported on Shelf Pins (factory installed)
- Automatic Non-Electric Condensate Evaporator
- Magnetic Snap-In EZ-Clean Door Gasket
- Gasket-Protecting Raised Door Liner
- Thermostatic Expansion Valve Metering Device
- Stainless Steel One-Piece Louver Assembly
- 9' Cord & Plug Attached
- Set of (4) 6" High Adjustable Stainless Steel Legs

### **ACCESSORIES & OPTIONS**

- SmartConnect<sup>™</sup> Monitoring App with Wi-Fi Connectivity
- Accommodates EZ-Clean™ Tray Racks
- Stainless Steel Finished Back with Rear Louvers
- Option to Relocate Electrical Box
- #1 Type Trayslides to Accommodate (1) 18" x 26" or (2) 14" x 18" Pans
- #4 Type Trayslides to Accommodate 18 to 19 Levels for 18" x 26" Pans
- Universal Type Trayslides to Accommodate (1) 18" x 26", (2) 14" x 18", or (2) 12" x 20" Pans
- · Additional Coated Wire or Optional Stainless Steel Shelves
- Stainless Steel Banking Strip
- EZ-Open™ Foot Pedal (full-height doors only)
- Positive Action Latch (consult factory)
- Kool Klad™ Exterior Laminate Decor (consult factory)
- Locking Haps (padlocks supplied by others)
- Optional 208-230/115/60/1, 208-230/60/1, or Export 220-240/50/1 Voltage
- Set of (4) 41/8" or 6" High Casters in Lieu of Legs
- 6" Stainless Steel Flanged Legs
- Other Support Options: 4<sup>1</sup>/<sub>2</sub>" High Base or 6" High Kickplate (for use with standard legs)
- Heat Shield



ENERGY STAR® Listed Commercial Freezer For full listing visit energystar.gov

- GUARANTEED FOR LIFE CAM-LIFT HINGES
- GUARANTEED FOR LIFE HORIZONTAL WORKFLOW DOOR HANDLES

Approved by	Date	Approved by	Date




30" Wide Reach-In Freezer 32" Deep, Self-Contained



# MODEL: RLT132WUT-HHS



https://traulsen.kclcad.com/

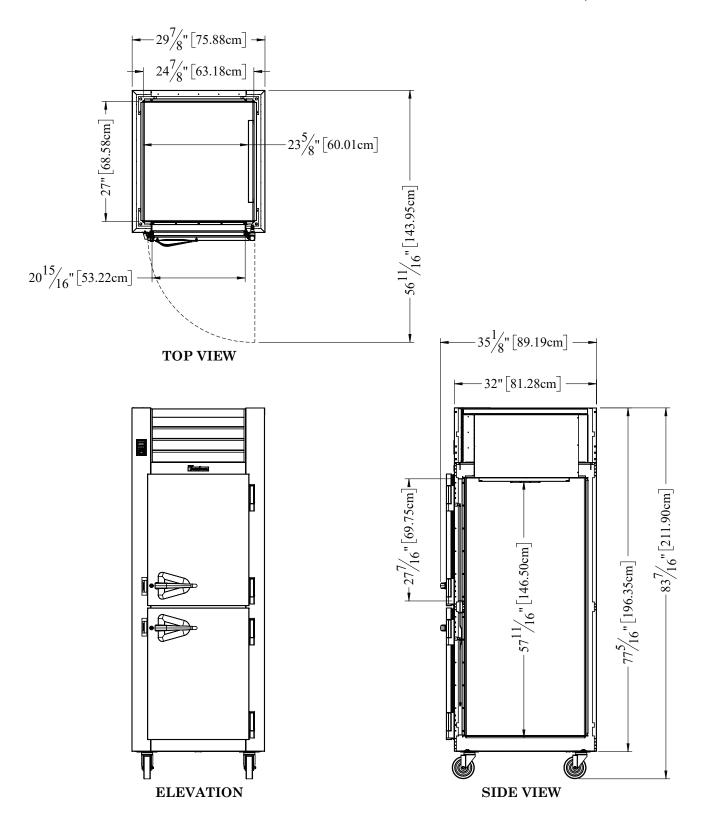








CAD and/or Revit Files Available

https://traulsen.kclcad.com/

# MODEL: RLT132WUT-FHS

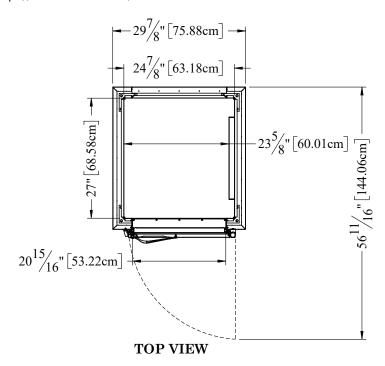

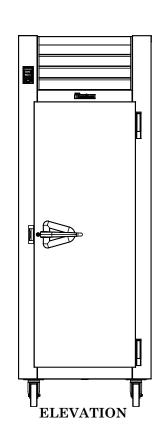

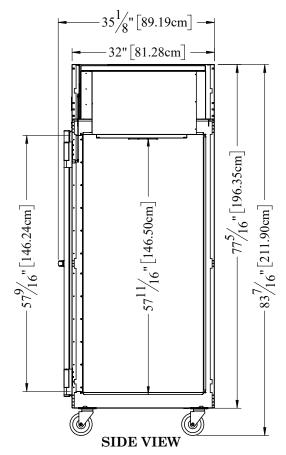



## **MODELS:**

#### RLT132WUT-HHS, RLT132WUT-FHS

MODELS	RLT132WUT	
DIMENSIONAL DATA		
Net capacity cu. ft.	23.43 (663.5 cu l)	
Length - overall in.	29 <sup>7</sup> / <sub>8</sub> " (75.9 cm)	
Depth - overall in.	35 ½" (89.2 cm)	
Depth - over body in.	32" (81.3 cm)	
Depth - door open 90° in.	56 <sup>11</sup> / <sub>16</sub> " (144 cm)	
Clear door width in.	20 <sup>15</sup> / <sub>16</sub> " (53.2 cm)	
Clear half-door height in.	27 <sup>7</sup> / <sub>16</sub> " (69.7 cm)	
Clear full-door height in.	57 <sup>9</sup> / <sub>16</sub> " (146.3 cm)	
Height - overall on 6" legs²	83 <sup>7</sup> / <sub>16</sub> " (211.9 cm)	
No. Standard Shelves	3	
Shelf area sq. ft.	13.46 (1.25 sq. m)	
ELECTRICAL DATA		
Voltage   Plug	115/60/1   NEMA 5-15P	
Full Load Amperes   KWH/24HR³	9.4   4.8	
REFRIGERATION DATA		
Refrigerant	R290	
Refrigerant Charge Amount oz.	4.8 (136 g)	
BTU/HR   H.P. <sup>1</sup>	1750   ½ HP	
SHIPPING DATA		
Length - Crated in.	48" (121.9 cm)	
Width - Crated in.	42" (106.7 cm)	
Height - Crated in.	85" (215.9 cm)	
Volume - Crated cu. ft.	99.17 (2808.2 cu l)	
Weight - Crated lbs.	462 (209.6 kg)	

**NOTES:** Figures in parentheses reflect metric equivalents.

- 1. Based on a 90°F ambient and -10°F evaporator.
- 2. 12" Top clearance preferred for optimum performance & service access.
- 3. KWH/24HR = Kilowatt usage per 24 hours

### **EQUIPMENT SPECIFICATIONS**

#### CONSTRUCTION, HARDWARE, INSULATION

The interior is made from stainless steel and the cabinet exterior front, one piece sides, louver assembly, door and door liner is constructed of heavy gauge stainless steel. The exterior cabinet top, back and bottom are constructed of heavy gauge galvanized steel. A set of four (4) adjustable 6" high stainless steel legs are included.

Door is equipped with a gasket-protecting metal door pan, removable plug cylinder locks & guaranteed for life gravity action, self-closing metal, cam-lift hinges with a stay open feature. Hinges include a concealed switch to automatically activate the interior LED lighting. Guaranteed for life, workflow door handle is mounted horizontally over recess in door which limits protrusion from door face into aisleways. Doors have seamless, polished metal corners.

Gasket profile & EZ-Clean™ material simplify cleaning & increase overall gasket life. Anti-condensate heaters are located behind the door opening. Both the cabinet & door is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

#### **SELF-CONTAINED REFRIGERATION SYSTEM**

A top mounted, self-contained, balanced refrigeration system using environmentally friendly, low GWP R290 refrigerant is conveniently located behind the one piece louver assembly. It features a finless StayClear  $^{\text{TM}}$  condenser, thermostatic expansion valve, air-cooled, hermetic variable speed compressor, large, high humidity evaporator coil located outside the food zone & top mounted non-electric condensate evaporator. A 9' cord & plug is provided. Standard operating temperature is 0 to -5°F (all models are -10°F capable in up to 100°F ambient).

# CONTROL

Traulsen's Smart Control<sup>TM</sup> features advanced control algorithms & sophisticated diagnostic capabilities to optimize performance. Utilizing smart sensors, it adapts the operation of the refrigeration system to a variety of environments & usage patterns. The Smart Control<sup>TM</sup> also offers a complete set of visual alarms designed to alert the user to critical events such as power outages or a prolonged door opening. In the event of an alarm, a dedicated Alarm LED will illuminate, informing the user of the critical event and duration.

#### INTERIOR

Standard interior arrangements include three (3) coated wire shelves per section, mounted on shelf pins. Shelves are full-width & do not have any large gaps between them requiring the use of "bridge" or "junior" shelves. Recommended load limit per shelf should not exceed 225 lbs. Interior arrangements are installed at the factory.

#### WARRANTY

Both a six year parts and labor warranty and a seven year compressor warranty (self-contained models only) are provided standard.

When ordering please specify: Voltage, Hinging, and Options.

Equipped with one NEMA 5-15P Plug

