



# UR27B-GLP01

## Undercounter 27" Low Profile Refrigerator with One Glass Door



UR27B-GLP01  
06/27/25  
Item # 13584

**W x D x H**  
27" x 31" x 31.9"\*  
\*with 2.25" casters



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- Specifically designed to fit under an ADA compliant 34" work surface height counter
- Engineered to maintain NSF-7 temperatures in 100°F ambient



- Stainless steel exterior sides and top with stainless steel interior sides, back, and floor

- Energy efficient LED interior lights with on/off switch
- Environmentally friendly R290 hydrocarbon refrigerant
- Cabinet and door are insulated with 2" of CFC free, foamed in place polyurethane
- Innovative air distribution system distributes air evenly to maintain product temperature
- Exclusive "stepped" door design to protect door gasket
- One piece, full length chrome handle
- Spring assisted self-closing door with stay open feature
- Extruded aluminum flush mount door handle
- Magnetic door gasket is easily removable for cleaning
- Hot gas condensate removal
- E-coated evaporator coil
- Anodized aluminum shelf supports adjustable in 1/2" increments
- Standard with 2.25" casters (two with brakes)
- 10 ft. cord and plug



### Dimensions / Capacity

**Interior Storage Capacity** (CF) (AHAM)

**Overall Width x Depth** (including 1" plate/bumper)

**Height** (including 2.25" casters)

**Door Opening Width x Height**

**Depth with Door Open at 90°** (including 1" bumper)

**Adjustable Shelves**

**Shelf Dimensions** (W x D)

**Crated Weight**

**Crated Length x Width x Height**

### One-Section UR27B-GLP01

6.21 ft<sup>3</sup>

27" x 32.5"

31.9"

22.75" x 23"

54.5"

1

22" x 16"

183 lbs.

36" x 31.5" x 35.5"

### Electrical / Refrigeration

**Voltage**

**HACR Breaker**

**Electrical Connection** (NEMA)

**Voltage Range**

**Ambient Temp. Range**

**Control Setpoint Range**

**Amperage**

**Energy Consumption** (kWh/day) @ASHRAE

**Heat Rejection** (BTU/Hr.) @NSF

**Approx. Nominal Compress.** BTU/HR (HP)

**Refrigerant / Charge Amount** (oz)

### One-Section UR27B-GLP01

115/60/1

15.0 Amps

5-15P Ⓢ

104-126

45° to 100°F

32° to 52°F

3

1.15

263

988 (1/6HP)

R290 (2.3oz)

### Options

- ☐ 4" Casters (HS-5035, set of 4)
- ☐ 6" Casters (HS-5036, set of 4)
- ☐ Foot pedal kit (HS-5555, Lft hinge)
- ☐ Foot pedal kit (HS-5556, Rt hinge)
- ☐ Overshelves (HS-5172 single)
- ☐ Overshelves (HS-5163 double)
- ☐ Lower epoxy shelves (HS-5161)
- ☐ Lower stainless shelves (HS-5169)
- ☐ Stainless steel back panel (factory request)



Seven year warranty on labor, parts, and compressor. Valid in United States, Canada, Puerto Rico and U.S. Territories.

For more information, please visit [hoshizakiamerica.com/support/warranty/](http://hoshizakiamerica.com/support/warranty/)

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.




# UR27B-GLP01

Undercounter 27" Low Profile  
Refrigerator with One Glass Door




UR27B-GLP01  
06/27/25  
Item # 13584


FRONT VIEW

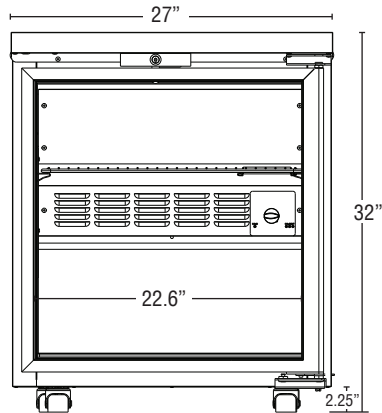

SIDE VIEW

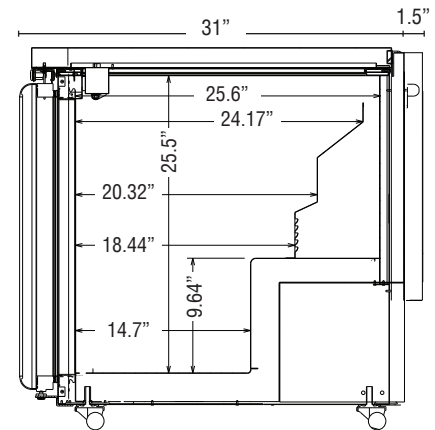

PLAN VIEW

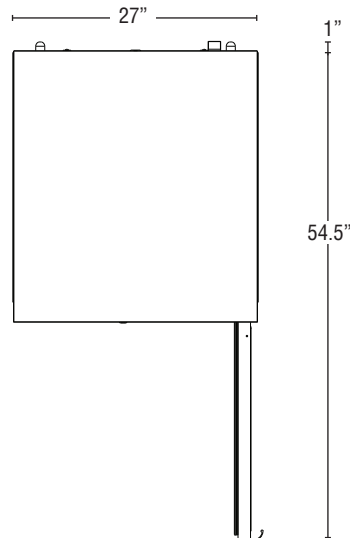

## Cabinet Construction

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior features stainless steel back, sides, floor and ceiling. One heavy duty epoxy coated shelf per section is standard. Mounted on anodized aluminum pilasters the shelf is adjustable in 1/2" increments. Cabinet walls and doors are insulated with 2" of environmentally friendly, CFC free, foamed in place polyurethane. 2.25" polyolefin, stem casters (two with brakes) are standard.

## Door Construction

Glass doors are constructed of high grade silver anodized aluminum with a full length chrome handle. Door glass is energy efficient multi pane, argon filled with locks. The door hinges are all metal and include an adjustable torsion spring closure that will not wear out like traditional cam-lift hinges. Hinge plates are constructed of heavy duty stainless steel. Doors stay open at 90° and are self-closing at 75°. Snap-in magnetic door gaskets are durable and easily removed for cleaning. Door hinging is field reversible (with an optional door reversal hinge kit).

## Refrigeration System

The high efficiency refrigeration system is self-contained with an E-coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes an "off cycle" defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).