

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Beverage Line Chillers

BLC	BLC-1/3, BLC-1/3-2, BLC-1/2, BLC-1/2-2, BLC-3/4, BLC-3/4-2, BLC-3/4-3
------------	--



BLC-3/4-2

Standard Features

- Enhanced cooling capacity allows longer line runs and more faucets per chiller
- 1/2" ID glycol connections with 100 GPH pump
- Durable stainless steel exterior with 16 gauge galvanized steel base
- Stainless steel, eco friendly, foamed-in-place insulated glycol bath
- Front located glycol filling port
- Digital temperature control with LCD display
- "-2" suffix in model number denotes two recirculating pumps, "-3" suffix in model number denotes three recirculating pumps

Optional Accessories

- LCS-G Galvanized line chiller stand
- LCR-G Galvanized line chiller wall rack
- Legs 6" legs with flanged feet


Intertek
 Conforms to ANSI/UL STD 471
 Certified to CSA STD
 C22.2 No. 120


Intertek
 Conforms to ANSI/UL STD 471
 Certified to CSA STD
 C22.2 No. 120



LCS-G

LCR-G

Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	


Beverage Line Chillers

Specifications

Model No.		BLC-1/3	BLC-1/3-2	BLC-1/2	BLC-1/2-2	BLC-3/4	BLC-3/4-2	BLC-3/4-3
Dimensionst	Length (inches)	28-7/8	28-7/8	28-7/8	28-7/8	28-7/8	28-7/8	28-7/8
	Width (inches)	28-5/8	28-5/8	28-5/8	28-5/8	28-5/8	28-5/8	28-5/8
	Height (inches)	24-1/8	24-1/8	24-1/8	24-1/8	24-1/8	24-1/8	24-1/8
Electrical	Voltage	120V	120V	120V	120V	208/240V	208/240V	208/240V
	Frequency	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
	Phase	1ø	1ø	1ø	1ø	1ø	1ø	1ø
	FLA	14A	20A	15A	21A	8.5A/9A	10.5A/11A	12.5A/13A
	Dedicated Circuit	20A	30A	20A	30A	20A	20A	20A
	Electrical Connection	Corded with NEMA 5-20P	Hard Wire	Corded with NEMA 5-20P	Hard Wire	Corded with NEMA 6-20P	Corded with NEMA 6-20P	Corded with NEMA 6-20P
Refrigerant	R448A	R448A	R448A	R448A	R448A	R448A	R448A	
Refrigerant Charge	24 oz	24 oz	24 oz	24 oz	24 oz	24 oz	24 oz	
Compressor	1/3 HP	1/3 HP	1/2 HP	1/2 HP	3/4 HP	3/4 HP	3/4 HP	
Capacities*	3,400 BTUH	2,800 BTUH	4,600 BTUH	4,100 BTUH	6,200 BTUH	5,700 BTUH	5,000 BTUH	
Heat Rejection (BTU/hr)	9,133 BTUH	10,990 BTUH	10,743 BTUH	12,700 BTUH	13,571 BTUH	14,709 BTUH	15,647 BTUH	
Circulating Pumps	100 GPH	100 GPH	100 GPH	100 GPH	100 GPH	100 GPH	100 GPH	
Glycol Bath Capacity	4 Gallons	4 Gallons	4 Gallons	4 Gallons	4 Gallons	4 Gallons	4 Gallons	
Shipping Weight LBS (kg)	190 (86.2)	205 (93)	190 (86.2)	205 (93)	200 (90.7)	215 (97.5)	230 (104.3)	

* Note: Rated capacities assume maximum operating ambient temperature of 80°F.

† Note: A minimum clearance of eight inches from the back and twenty-four inches from the left and right sides of the unit must be allowed for proper air flow. See diagram below.

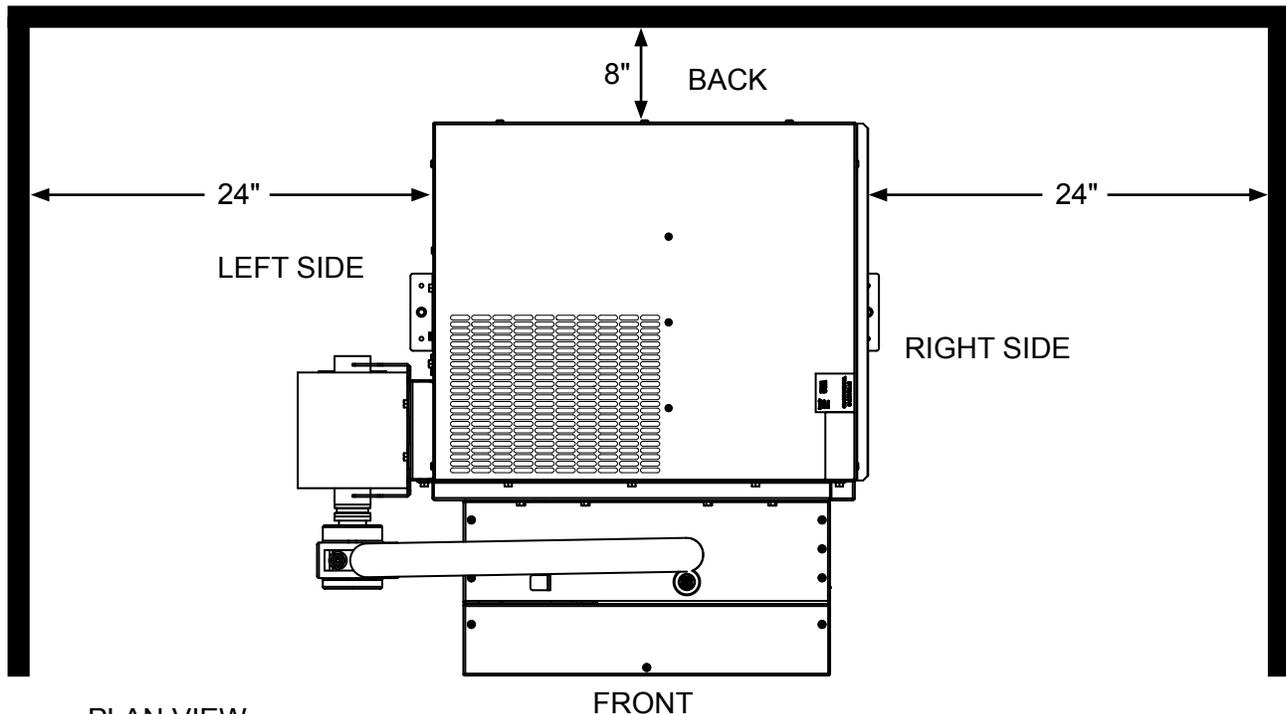


PLAN VIEW

FRONT


Beverage Line Chillers

Dimensions


BLC-1/3, BLC-1/2, BLC-3/4

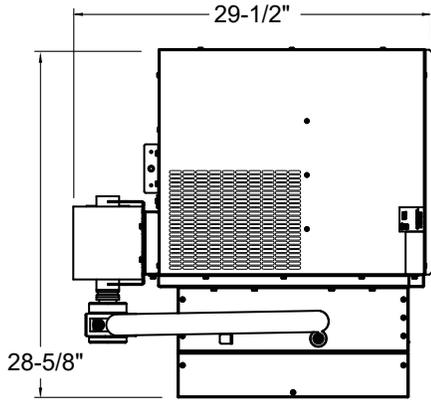

PLAN VIEW

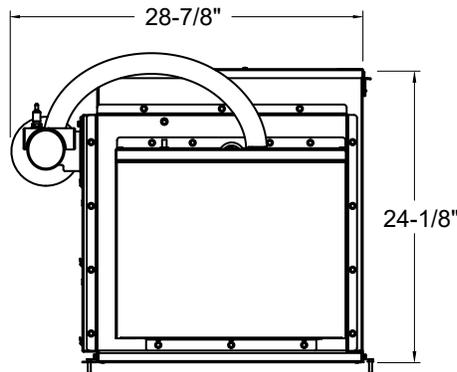


FRONT ELEVATION

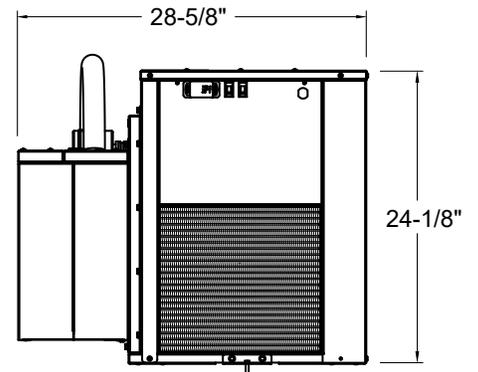


SIDE ELEVATION


BLC-1/3-2, BLC-1/2-2, BLC-3/4-2

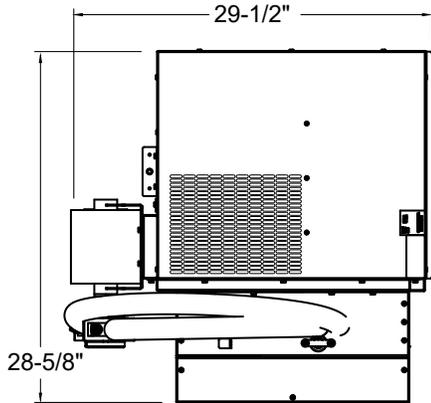

PLAN VIEW

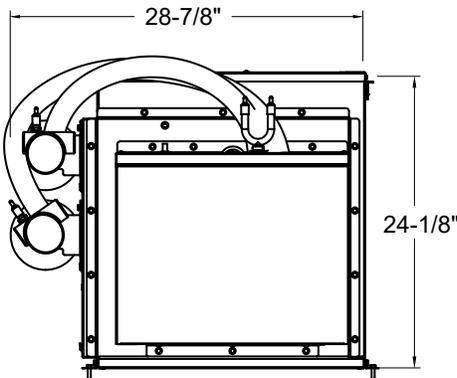


FRONT ELEVATION

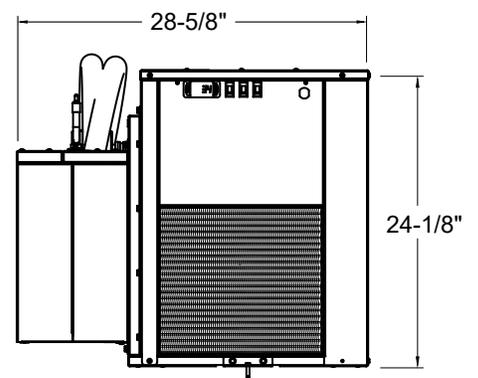


SIDE ELEVATION


BLC-3/4-3

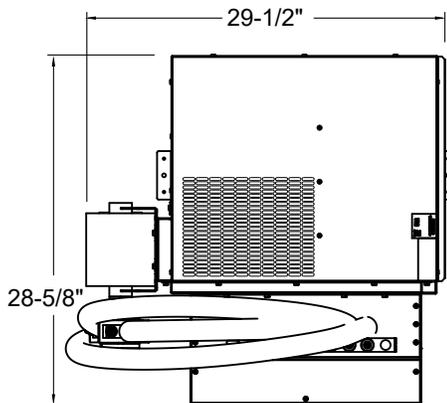

PLAN VIEW

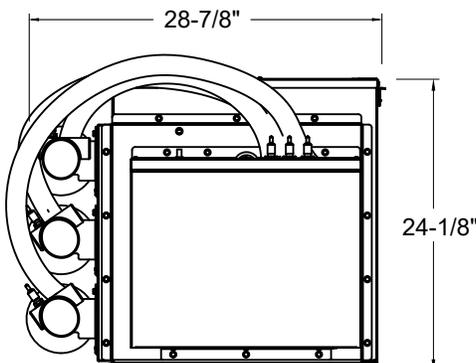

FRONT ELEVATION

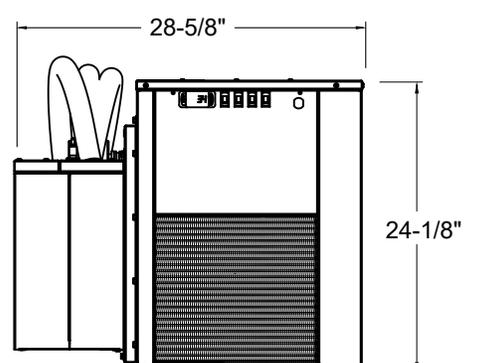

SIDE ELEVATION