


Intertek
 4004503
 Conforms to NSF/ANSI STD 2

Dimensional Information

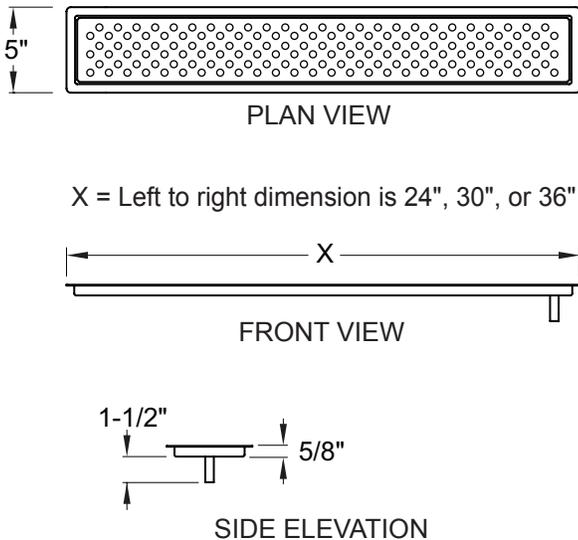

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Drink Rails

DI-DR	DI-DR24, DI-DR30, DI-DR36
--------------	---------------------------

Standard Features

- All stainless steel construction
- Available in 24", 30", or 36" lengths
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows

Specifications

Drains

- 1/2" welded tailpiece

Cut-out Dimensions

- Model DI-DR24 - 4-1/4" by 23-1/4"
- Model DI-DR30 - 4-1/4" by 29-1/4"
- Model DI-DR36 - 4-1/4" by 35-1/4"

Materials

- 20 gauge stainless steel parts include: perforated insert
- 18 gauge stainless steel parts include: drain pan

Installation Instructions

1. Make a cut-out in work surface using cut-out dimensions (located under Specifications) for appropriate model.
2. Make initial drain connections, especially if access to drain is limited once the unit is in place
3. Place unit into cut-out and finish plumbing the drain line.
4. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	