

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

|                   |        |
|-------------------|--------|
| Project:          |        |
| Model #:          |        |
| Item #:           |        |
| Available W/H:    | Qty:   |
| Approval:         |        |
| AIA #:            | SIS #: |
| CSI Section 11400 |        |

## Pass Thru Solid Door Heated Cabinet

Reach-In  
 M3 Series

**Model : M3H24-1-PT**

### ≡ FEATURES & BENEFITS ≡

- **Digital temperature control & monitor system**
  - Keeps food products safe by maintaining constant temperatures
  - Alarm beeps when doors are not sealed
  - Digital display allows for easy monitoring
- **Ducted fan air distribution system**  
 Maintains temperature within the food zone
- **On/Off switch**  
 ON/OFF switch is located on control panel
- **Stainless steel cabinet construction**  
 The Turbo Air M3 heated cabinet model boasts a stainless steel exterior (galvanized steel top, bottom and back) and interior. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.
- **LED interior lighting**
- **High-density polyurethane insulation**  
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **Field reversible door hinge**
- **Adjustable, stainless steel wire shelves**
- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**




| Model             | Swing Doors | CU./FT.     | #of Shelves | Wattage (W) | AMPS       | Crated Weight (lbs.) | L x D x H† (inches)                                                   |
|-------------------|-------------|-------------|-------------|-------------|------------|----------------------|-----------------------------------------------------------------------|
| <b>M3H24-1-PT</b> | <b>2</b>    | <b>22.7</b> | <b>3</b>    | <b>950</b>  | <b>8.5</b> | <b>231</b>           | <b>28<sup>3</sup>/<sub>4</sub> X 33<sup>1</sup>/<sub>8</sub> X 78</b> |

# Pass Thru Solid Door Heated Cabinet

Reach-In  
M3 Series

## Model : M3H24-1-PT

| ELECTRICAL DATA            |                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------|
| Voltage                    | 115/60/1                                                                                     |
| Plug Type                  |  NEMA 5-15P |
| Full Load Amperes          | 8.5                                                                                          |
| Wattage (W)                | 950                                                                                          |
| Cord Length (ft.)          | 8                                                                                            |
| DIMENSIONAL DATA           |                                                                                              |
| # of Doors                 | 2                                                                                            |
| # of Racks Accepted        | 1                                                                                            |
| Net Capacity (cu. ft.)     | 22.7                                                                                         |
| Ext. Length Overall (in.)  | 28 <sup>3</sup> / <sub>4</sub> (730mm)                                                       |
| Ext. Depth Overall (in.)   | 33 <sup>1</sup> / <sub>8</sub> (840mm)                                                       |
| Ext. Height Overall (in.)† | 78 (1981mm)                                                                                  |
| Int. Length Overall (in.)  | 22 <sup>3</sup> / <sub>8</sub> (568mm)                                                       |
| Int. Depth Overall (in.)   | 24 <sup>5</sup> / <sub>8</sub> (625mm)                                                       |
| Int. Height Overall (in.)  | 58 <sup>3</sup> / <sub>4</sub> (1493mm)                                                      |
| # of Shelves               | 3                                                                                            |
| Shelf Size (L x D) (in.)   | 23 <sup>1</sup> / <sub>2</sub> x 21 <sup>5</sup> / <sub>8</sub>                              |
| Net Weight (lbs.)          | 188                                                                                          |
| Gross Weight (lbs.)        | 231                                                                                          |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

† Height does not include 5" for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty

### ■ STANDARD FEATURES


- Door locks
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

### ■ OPTIONAL ACCESSORIES


- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Half door bun tray rack: TSP-2224 (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250-T (each holds up to fifteen 18"L x 26"D sheet pans)
- 5 pairs of universal tray slides and pilasters for M3H24-1: TS1-UNM (requires installation)
- Additional stainless steel wire shelf: T24H938760

## PLAN VIEW

(unit : inch)

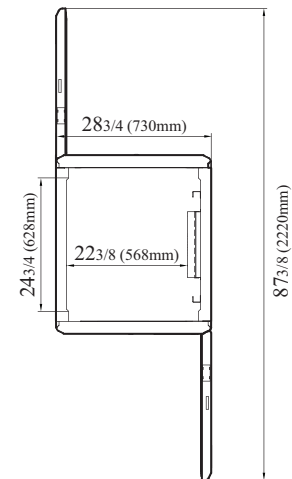


TOP VIEW

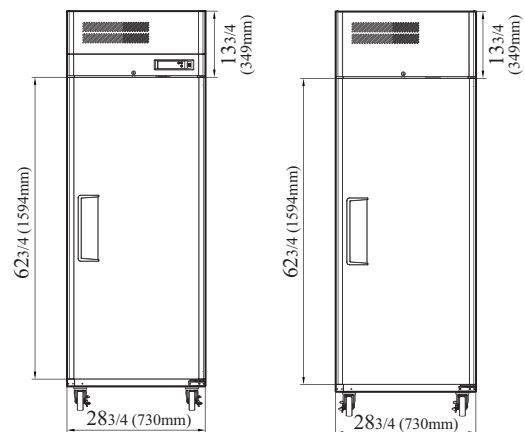

FRONT VIEW

BACK VIEW

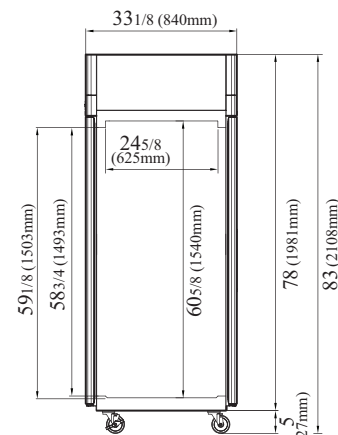

SIDE VIEW

Ver.20260318



- Turbo Air: 800-627-0032
- Bake Tech Innovation: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002