



PERLICK®



MODEL NUMBERS - PTS36, PTS60, PTS84,

SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR



PTS36 shown



PTS60 shown

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS
PTS36
PTS60
PTS84

OPTIONS

MODEL NOS.	DESCRIPTION
PTS36	2-door model
PTS60	4-door model
PTS84	6-door model

Form No. Z2381
Rev. 04.14.25



PERLICK®



MODEL NUMBERS - PTS36, PTS60, PTS84,

SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBERS		PTS36	PTS60	PTS84
NUMBER OF DOORS		2	4	6
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	36 (914)	60 (1524)	84 (2134)
	Depth - in. (mm)	26 ¹ / ₁₆ (678)	26 ¹ / ₁₆ (678)	26 ¹ / ₁₆ (678)
	Height - in. (mm)	34 ⁹ / ₁₆ (878)	34 ⁹ / ₁₆ (878)	34 ⁹ / ₁₆ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	20 (508)	44 (1118)	68 (1727)
	Depth - in. (mm)	18 ³ / ₄ (476)	18 ³ / ₄ (476)	18 ³ / ₄ (476)
	Height - in. (mm)	31 (787)	31 (787)	31 (787)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		8.0 (227)	17.4 (493)	26.7 (756)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	182/273	371/553	581/868
	STAGGERED - 12 OZ. BOTTLE/CAN	196/292	400/592	628/932
SHIPPING WEIGHT Lbs. (kg.)		264 (120)	354 (161)	496 (225)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.8	2.5	4.2
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	6'5"	6'5"	6'5"
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/6	1/5	1/4
	Refrigerant	R290	R290	R290
	Refrigerant Charge gm.	90	100	90
	Factory Temperature Setting-Refrigerator F (C)	38° (3.3°)	38° (3.3°)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting-White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting-Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range-Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube
	Pull Out Condensing Unit	Yes	Yes	Yes
Front Vented	Yes	Yes	Yes	
PLUMBING	Floor Drain Included	Yes	Yes	Yes
	Evaporator Condensate	Automatically	Automatically	Automatically

Form No. Z2381
Rev. 04.14.25




PERLICK®

COMMERCIAL



MODEL NUMBERS - PTS36, PTS60, PTS84,

SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

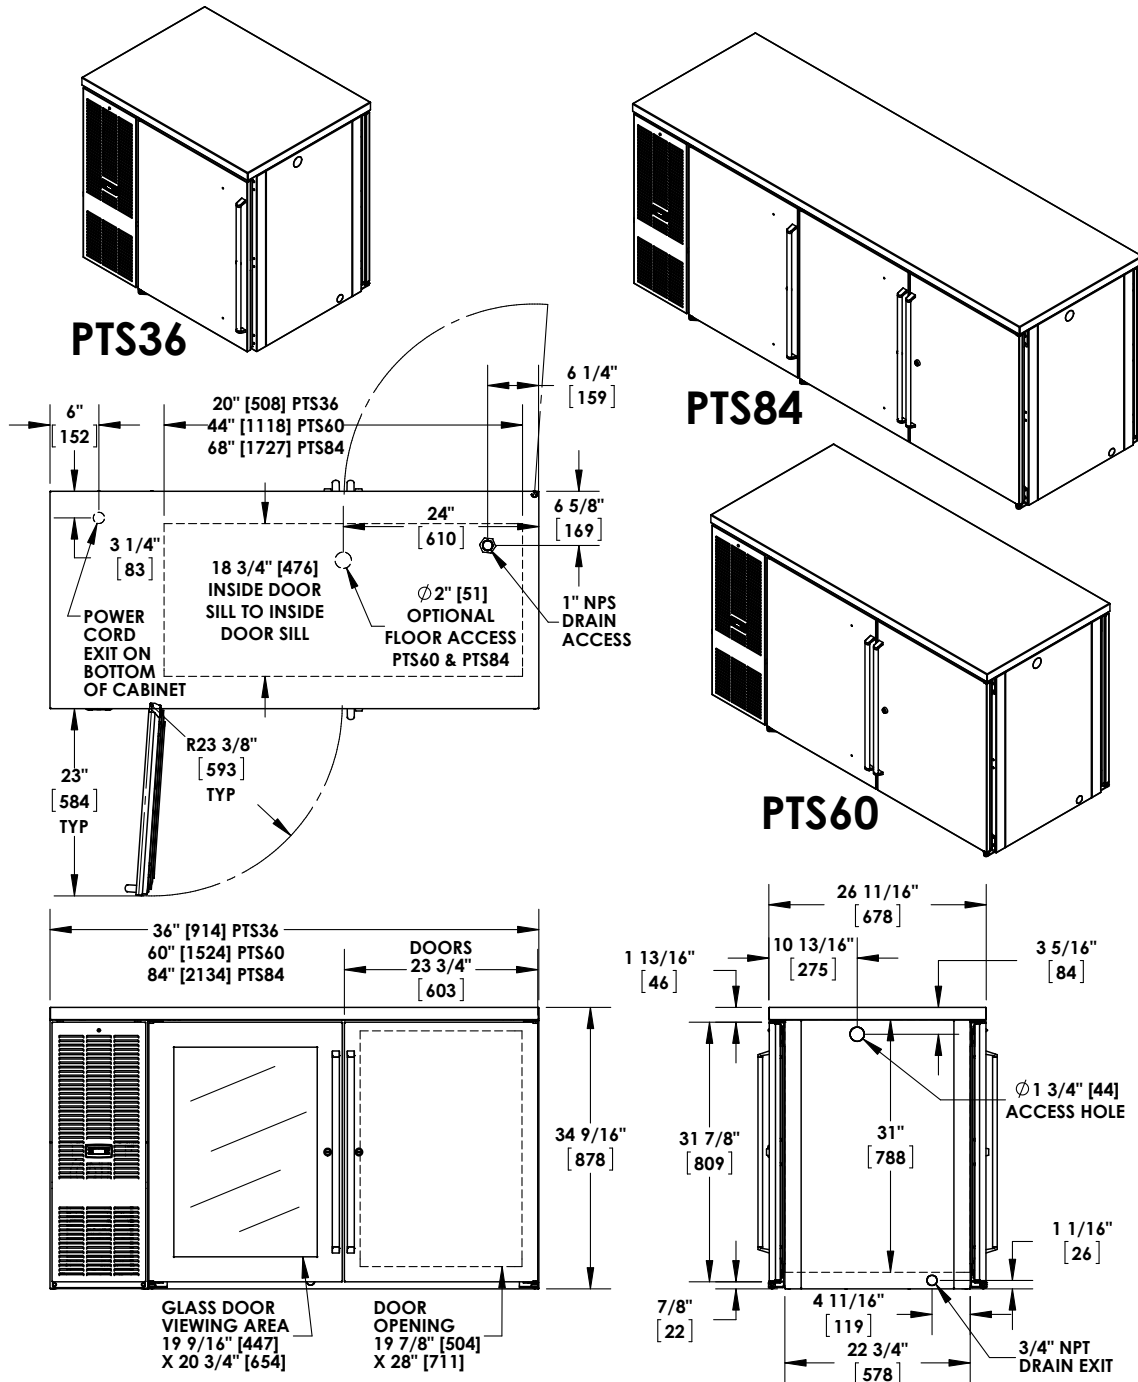

Form No. Z2381
Rev. 04.14.25