(II)	BEVERAGE-AIR.
------	---------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

FOOD PREPARATION TABLES

DPD67HC Deli/Pizza Prep Table with One Door and Three Drawers Hydrocarbon Series



CABINET CONSTRUCTION

7 Year Parts/Labor Warranty 7 Year Compressor Warranty

- Stainless steel front, sides, top, door, drawers and grille (galvanized
- Interior liner is made of corrosion resistant aluminum
- Aluminum top interior liner prevents spill from falling into cabinet
- Stainless steel top
- Removable hoods and insulated lid assemblies are made of matching stainless steel
- Self-closing door with 120° stay-open feature on cam-lift hinges
- Magnetic gaskets provide positive seal on both door and drawers
- Field reversible door
- 3" Casters, 2 with brakes standard
- 19" Wide reversible cutting board is removable for easy cleaning
- Two (2) epoxy-coated steel wire shelves
- Units will accept pans up to 6" deep (pans are not included)
- Drawer frames are heavy-duty stainless steel
- 12-Gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs
- Telescoping slides, with locking mechanism to prevent drawers from being pulled off of cabinet
- Heavy-duty pan locking divider supports are standard in drawers
- Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Clear lid
- Overshelf kits
- Additional shelves
- Shelf clips
- Pan support
- Door locks
- Composite cutting board
- Thermometer
- Night cover
- Bun tray rack
- 6" Casters
- 6" Legs black or seismic/flanged
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- · Epoxy coated evaporator coil
- Enhanced airflow maintains temperatures between 36° 38°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



EXTERNAL DIMENSIONAL DATA	MODEL	DPD67HC-3		
Depth Overall with Cutting Board	EXTERNAL DIMENSIONAL DATA			
Height Overall with Casters 54 %"	Width Overall	67"		
No. of Drawers 3	Depth Overall with Cutting Board	38 1/8"		
Depth with Drawer Extended 57 1/4"	Height Overall with Casters	54 ¾"		
Drawer Openings 21 %" x 6 %"	No. of Drawers	3		
No. of Doors	Depth with Drawer Extended	57 1⁄4"		
Door Opening	Drawer Openings	21 %" x 6 %"		
Cutting Board 19" INTERNAL DIMENSIONAL DATA NET Capacity (cubic ft.) 20.7 Internal Width Overall (in) 63" Internal Width Usable (in) 48" Internal Depth Overall (in) 26" Internal Height Overall (in) 23 1/8" No. of Shelves 2 ELECTRICAL DATA Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 70"	No. of Doors	1		
INTERNAL DIMENSIONAL DATA	Door Opening	21 %" x 23 %"		
NET Capacity (cubic ft.) 20.7 Internal Width Overall (in) 63" Internal Width Usable (in) 48" Internal Depth Overall (in) 26" Internal Height Overall (in) 23 %" No. of Shelves 2 ELECTRICAL DATA Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA 482 lbs Gross Weight - Crated 48" Width - Crated 70"	Cutting Board	19"		
Internal Width Overall (in)	INTERNAL DIMENSIONAL DATA			
Internal Width Usable (in) 48" Internal Depth Overall (in) 26" Internal Height Overall (in) 23 1/6" No. of Shelves 2 ELECTRICAL DATA Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 70"	NET Capacity (cubic ft.)	20.7		
Internal Depth Overall (in) 26" Internal Height Overall (in) 23 %" No. of Shelves 2 ELECTRICAL DATA Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (Ibs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Internal Width Overall (in)	63"		
Internal Height Overall (in) No. of Shelves 2 ELECTRICAL DATA Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Internal Width Usable (in)	48"		
No. of Shelves 2	Internal Depth Overall (in)	26"		
ELECTRICAL DATA Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA 1/3 Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA 482 lbs Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Internal Height Overall (in)	23 1/8"		
Full Load Amperes 4.5 Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	No. of Shelves	2		
Voltage 115/60/1 Nema Plug (8' cord) 5-15P REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA 482 lbs Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	ELECTRICAL DATA			
Nema Plug (8' cord) REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Full Load Amperes	4.5		
REFRIGERATION DATA Horsepower 1/3 Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA 482 lbs Gross Weight - Crated 48" Width - Crated 70"	Voltage	115/60/1		
Horsepower	Nema Plug (8' cord)	5-15P		
Capacity (BTU/Hr) 2940 Heat Rejection (BTU/Hr) 4410 Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	REFRIGERATION DATA			
Heat Rejection (BTU/Hr)	Horsepower	1/3		
Charge (lbs/grams/ounces) 0.2315 / 105 / 3.7 SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Capacity (BTU/Hr)	2940		
SHIPPING DATA Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Heat Rejection (BTU/Hr)	4410		
Gross Weight - Crated 482 lbs Height - Crated 48" Width - Crated 70"	Charge (lbs/grams/ounces)	0.2315 / 105 / 3.7		
Height - Crated 48" Width - Crated 70"	SHIPPING DATA			
Width - Crated 70"	Gross Weight - Crated	482 lbs		
	Height - Crated	48"		
Depth - Crated 37"	Width - Crated	70"		
	Depth - Crated	37"		


*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4*. Metric dimensions (MM).





Deli/Pizza Preparation Table with Drawers

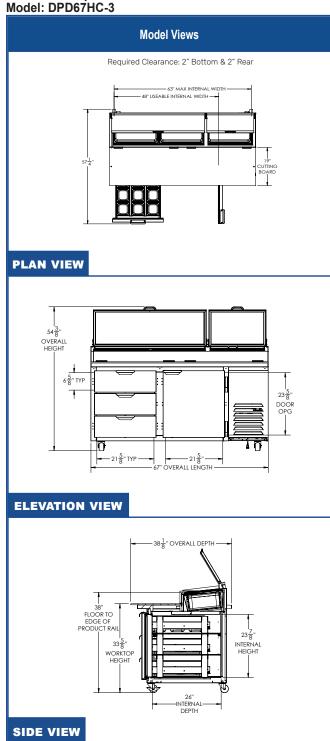

ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

