

## DSLHRT Roll-Thrus

### Heated Roll-Thrus

#### Models

☐ DSLHRT1-S

☐ DSLHRT2-S



DSLHRT2-S

#### Standard Features

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 8' cord and plug
- Adjustable Electronic Temp Control From 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Accepts Carts: 26 1/2" w x 28" D x 65" H (cart not included)
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

#### Options & Accessories

- Stainless Steel Back And Shroud
- Door Swing Orientation (at time of order)
- Correctional Package
- Exterior Door Laminate


#### Specifications

**Heating system:** Cabinets are designed to maintain temperatures between 80°F - 180°F. Units are heated with two bottom-mounted heating elements per section. The externally mounted blower allows for full use of interior cabinet while maintaining even temperatures. System is controlled using an electronic temperature control.




DSLHRT Heated Roll-Thrus

## DSLHRT1-S

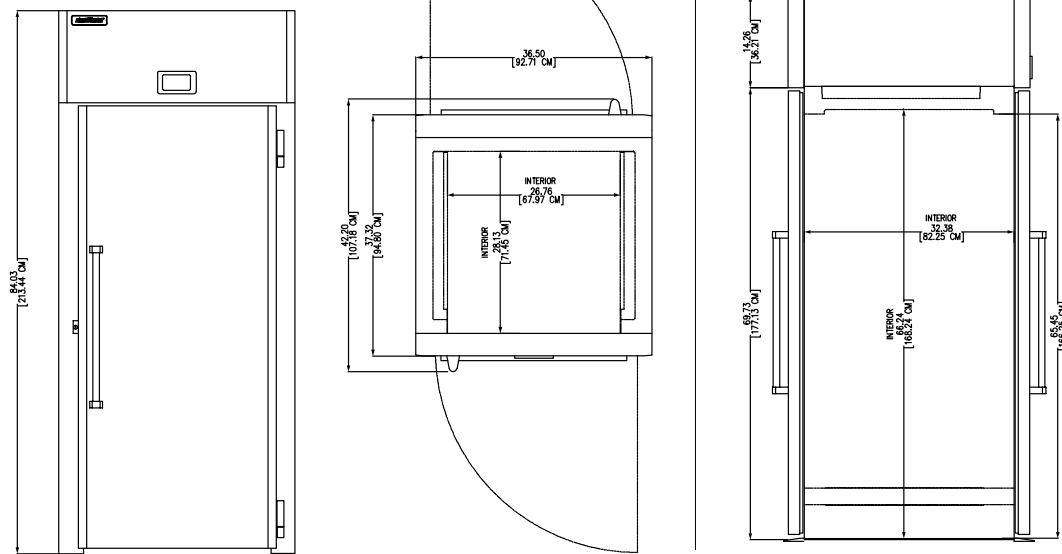

## DSLHRT2-S

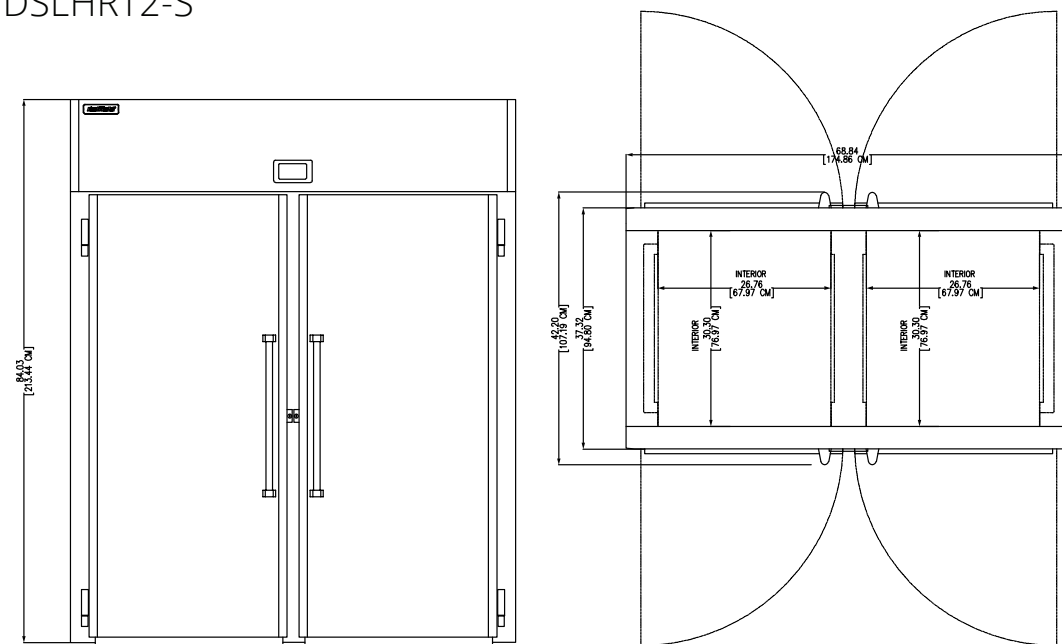

Specifications								
Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Heater Watts	Ship Weight	Nema Plug
DSLHRT1-S	208-240/60/1	6.8	38.7	N/A	N/A	1500	388	6-20P
DSLHRT2-S	208-240/60/1	13	72.4	N/A	N/A	3000	662	6-20P

Welbilt reserves the right to make changes to the design or specifications without prior notice.