

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

HORIZON BOTTOM MOUNT REACH-IN

HBR19HC Glass Door Reach-In Refrigerator

Hydrocarbon Series





7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, side, and grille (galvanized back & bottom)
- · Stainless steel interior
- LED lighting
- Full electronic control with one-touch defrost
- One–piece grille allow easy removal/installation for preventative maintenance
- Self closing door with 120° stay open feature
- Spring-loaded style hinges
- Plug-in magnetic door gaskets
- Three (3) heavy duty epoxy coated wire shelves
- 6" Casters with two (2) brakes

OPTIONS & ACCESSORIES

- Stainless steel universal tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- 3" Caster or 6" legs
- Door locks
- Epoxy shelves
- · Shelf clips
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerator capable of maintaining product temperatures between 36°F and 38°F








MODEL	HBR19HC-1-G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall with Handle	27 ½"	
Height Overall	84 1/8"	
Number of Doors	1	
Depth with Door Open 90°	51 ¾"	
Door Opening (in)	24 1⁄8" x 52 1⁄2"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.08	
Internal Width Overall (in)	24 1⁄4"	
Internal Depth Overall (in)	22 ½"	
Internal Height Overall (in)	61 ¾"	
Internal Height Useable (in)	55"	
Number of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes	2.88	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1702	
Heat Rejection (BTU/Hr)	2553	
Charge (lbs/grams/ounces)	0.1985 / 90 / 3.18	
SHIPPING DATA		
Gross Weight - Crated	380 lbs	
Height - Crated	85"	
Width - Crated	36"	
Depth - Crated	34"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4°. Metric dimensions (MM).

Bottom Mount Reach-In Refrigerator Model: HBR19HC-1-G

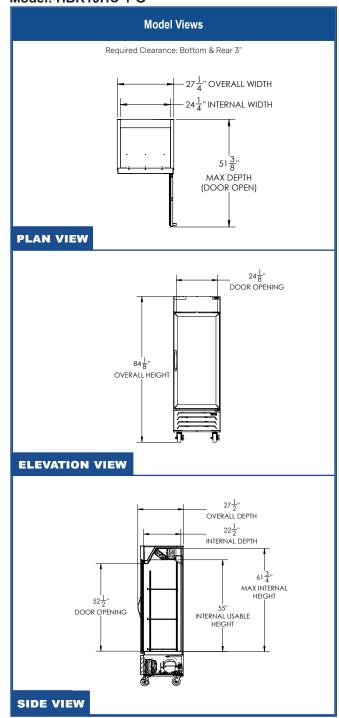



ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.



