

35-5/8"L x 34-1/4"D x 82-1/4"H • B37D • B47D 47-5/8"L x 34-1/4"D x 82-1/4"H

Included

- Casters (non-locking) w/ levelers
- One piece formed ABS plastic tub
- One year parts & labor warranty
- Rear wall spacer (removable to fit through door opening)
- Top light (LED 4000K)



Standard Features	Additional Options					
Powder coated Silversan Black	Laminate (stock/non-stock colors)					
	Powder coated (stock/non-stock colors)					
	Stainless steel					
Powder coated Silversan Black	Powder coated Designer White					
	Stainless steel					
Powder coated Silversan Black	Stainless steel (must choose stainless exterior)					
Powder coated Silversan Black	Stainless steel					
Casters (non-locking) w/ levelers						
Full w/stainless steel mirror interior	Cutaway w/ glass					
	None (synchronized defrost required)					
• None	Full wrap graphic set					
	Logo graphic only					
• None	¹ • Night curtain, retractable, non-locking					
	Removable solid security cover, locking					
	Roll-down security cover, locking					
• None	Universal price tag molding (clear w/ open top)					
None (solid back panel)	Rear loading hinged doors, locking					
Metal shelves (4), non-lighted	Metal shelves (4), lighted (LED 4000K)					
6' Straight blade power cord						
	Second year parts & labor warranty					
	Powder coated Silversan Black Powder coated Silversan Black Powder coated Silversan Black Powder coated Silversan Black Casters (non-locking) w/ levelers Full w/stainless steel mirror interior None None None None None Metal shelves (4), non-lighted					

Option Notes: 1 - One cover/curtain type per model


Structural Concepts

DELIVERING FRESH. ALWAYS.™

In	tende	d Environment:	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.							
Zo	ne	Intended Product To	Warmest Avg Prod Temp ° F							
	1	Packaged non-refrige	erated products	Ambient						

PLAN VIEW

SIDE VIEW

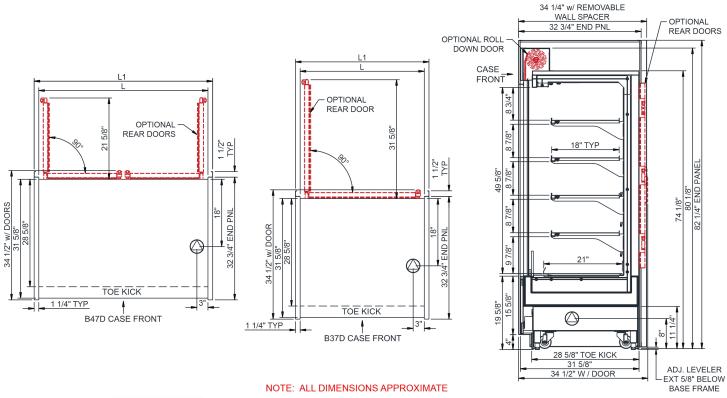

ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).

LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH), OR 1% PVC TUBE).

REFRIGERATION LINE CONNECTION.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
B37D	33.13	35.63	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.12	34	2+G	5-15P or L5-15P	N/A	N/A	N/A	650
B47D	45.13	47.63	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	1.12	48	2+G	5-15P or L5-15P	N/A	N/A	N/A	750

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

None

DOE 2017

Energy Efficiency

Important Notes:

- 1) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 2) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 3) If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.

▲ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.