

# BACK BAR EQUIPMENT

## Model: **KC59N**

Natural Refrigerant R-290 Model

### 59" Keg Cooler

Textured baked black enamel finish exterior, stainless steel countertop, interior back and side panels with reinforced stainless steel floor.



## Options and Accessories

(upcharge and lead times may apply)

|                                                     |                                   |
|-----------------------------------------------------|-----------------------------------|
| Epoxy coated or stainless steel shelves             | Single, dual, or triple faucets   |
| Wine racks                                          | Tower placement (consult factory) |
| Hinged glass door(s) (consult factory)              | Faucet locks                      |
| Food storage rated stainless steel interior (NSF-7) | Casters or legs                   |
| Condensing unit on right (standard left)            | Riser base*                       |

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

### CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Front, rear and side venting louvered grills

Magnetic snap in Santoprene™ door gaskets

Cylinder-keyed security lock in each door

Stainless steel reinforced threshold

### MODEL FEATURES

Low profile cabinet design

Electronic control, off cycle defrost

LED interior lighting

Continuously cooled, 3" diameter beer column with lever faucet, CO<sub>2</sub> pressure relief distributor and CO<sub>2</sub> tubing with clamps

Easily removable stainless steel drip grate with convenient front mounted cleanout drainage hose (pan not removable)

Easily accessible and serviceable condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                          |                                          |
|----------------------------------------------------------|------------------------------------------|
| Net Capacity (cubic feet)                                | 22 (623 l)                               |
| Width, Overall (inches)                                  | 59 (1499 mm)                             |
| Depth, Overall (inches)<br>(including handles & bumpers) | 29 <sup>3</sup> / <sub>16</sub> (741 mm) |
| Depth, Body Only (inches)<br>(less doors)                | 25 (635 mm)                              |
| Height, Overall (inches)<br>(not including columns)      | 34 <sup>3</sup> / <sub>4</sub> (883 mm)  |
| Capacity: # Barrel Kegs                                  | 2                                        |
| Capacity: # Straight Wall Kegs                           | 3                                        |
| Capacity : # <sup>1</sup> / <sub>6</sub> Size Kegs       | 9                                        |
| Number of Doors                                          | 2                                        |
| Number of Beer Columns<br>(with single faucets)          | 2                                        |

### REFRIGERANT DATA

|                             |                             |
|-----------------------------|-----------------------------|
| Condensing Unit Size (H.P.) | <sup>1</sup> / <sub>4</sub> |
| Capacity (BTU per hour)*    | 1930                        |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Feed Wires (including ground)                  | 3                   |
| Total Amps (International)                     | 3.7 (3.4)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA

|                          |              |
|--------------------------|--------------|
| Weight (pounds)          | 350 (159 kg) |
| Height - Crated (inches) | 46 (1168 mm) |
| Width - Crated (inches)  | 65 (1651 mm) |
| Depth - Crated (inches)  | 42 (1067 mm) |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

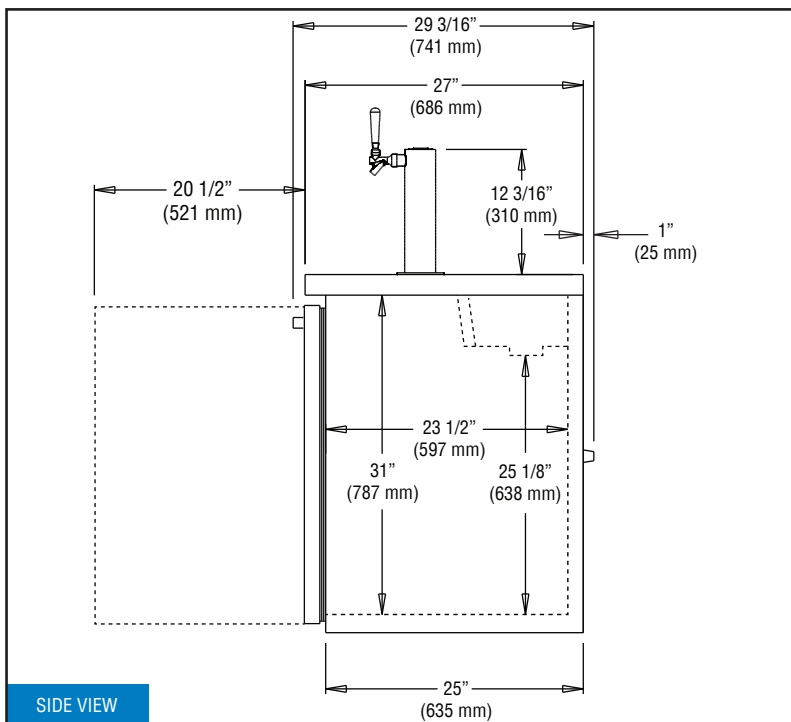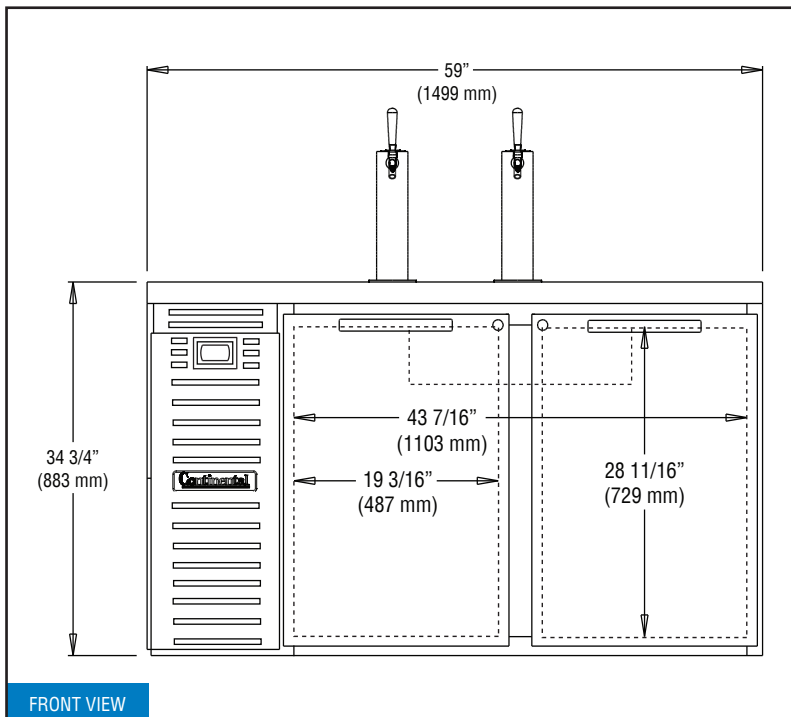

**IMPORTANT NOTE:** Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet **must** not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.

REVISED: 2/19/25