

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Reach-In Half-Door Freezers



FEATURES LIST

CSD-2HDF-BAL-HC, CSD-4HDF-BAL-HC

- CFC free refrigerant and foam with self contained capillary tube system
- Electronic thermostat and digital LED temperature display for accurate control
- Temperature Range: -11°F - 1°F
- Self-closing doors that remain open past 90°
- Magnetic gasket can be replaced without a tool
- Door Locks & LED Interior Lighting
- Larger fan motors and blades for more efficient airflow for fast recovery times
- Four casters, two front locking
- Adjustable heavy duty epoxy coated wire shelves
- Environment Friendly Freon R290
- Easy slide out compressor housing for service
- Bottom mount raises the floor for ease of adding and removing product
- Warranty: 2 years parts and labor additional 3 years- compressor
- Zero clearance sides, 2" rear clearance

*Not suitable for installation in a non-commercial or residential applications.


Certified To ANSI/
NSF 7 Standards



As continued product improvement is a policy,
specifications are subject to change without notice

Approvals

PLAN VIEW

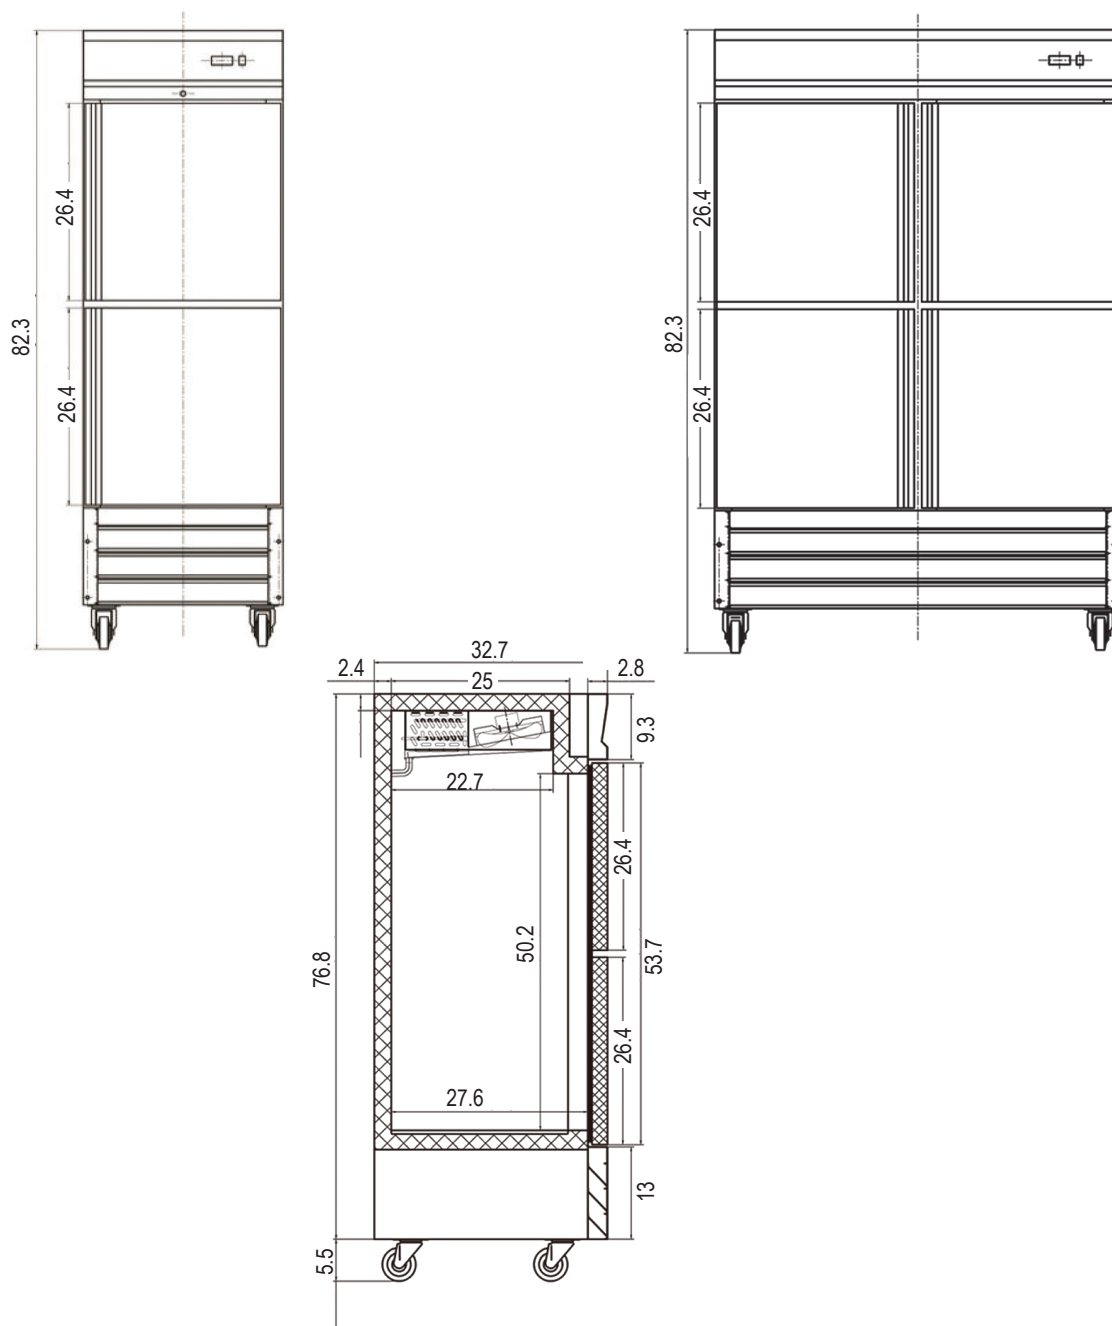

| Model | Doors | Shelves | Shelf Sizes | Cabinet Dim (in) | | | HP | Voltage | Amp | NEMA Plug | Cord Lgth(ft) | Crated Weight (lbs) |
|-----------------|-------|---------|-------------|------------------|------|------|-----|----------|------|-----------|---------------|---------------------|
| | | | | W | D | H | | | | | | |
| CSD-2HDF-BAL-HC | 2 | 3 | 24.3/ 21.6 | 26.8 | 32.7 | 82.3 | 5/8 | 115/60/1 | 9.0 | 5-15P | 8.2 | 306 |
| CSD-4HDF-BAL-HC | 4 | 6 | 24.3/ 21.6 | 53.9 | 32.7 | 82.3 | 1 | 115/60/1 | 12.0 | 5-15P | 8.2 | 489 |