

15" OVERLAY PANEL DOOR CLEAR ICE MACHINE — ADA

TUIADA-15-RS/LS-A~O

TUIADA-15-RS-A~O (Right hinged)

TUIADA-15-LS-A~O (Left hinged)

FEATURES

- Articulating, soft close hinge allows fully integrated, flexible installations.
- Produces up to 75lbs. of clear ice per day with a storage capacity of 28lbs.
- Bin Level Control for entertaining flexibility (50%, 65%, 70%, 85%, 100%).
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- · Concealed digital control located behind toekick.
- Exclusive True Magna Scoop for easy storage on door.
- Industry exclusive, standard built-in drain pump.
- External water filter kit included rated up to 1250 gallons.
- · Automatic cleaning system.
- · All undercounter models UL rated for outdoor use.
- Environmentally friendly R290 refrigerant.
- Energy Star rated.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at **true-residential.com/custom**.













TUIADA-15-RS-A~O

SPECIFICATIONS


Dimensions (w x h x d)	14%" x 31%" x 23 ¹⁹ /32"
Cutout Dimensions (w x h x d)	15" x 32" x 24"
Standard Overlay Panel (w x h x d)	14 ⁵ / ₈ " x 27 ⁷ / ₈ " x ³ / ₄ "
Panel provided by others. Other insta Consult install guide for details.	allation options available.
Operating Requirements Air Temperature Water Temperature Water Pressure (PSIG)	40°F — 100°F 40°F — 100°F 20 — 80
Maximum Ice Capacity (Ibs/day) Rated Ice Capacity (Ibs/day) Rated Ice Storage (Ibs) Rated Energy Consumption	75 75 28
(kWh/lbs) Rated Water Consumption (Gal/lbs)	6.65 / 100 24.2 / 100
Plumbing	Water Supply: ½" OD copper, braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: ½" NPT.
Plumbing Weight (lbs.)	braided stainless steel or PEX tubing and compression fittings (not included).
	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: 1/2" NPT.
Weight (lbs.)	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: ½" NPT.
Weight (lbs.) Voltage	braided stainless steel or PEX tubing and compression fittings (not included). Drain Pump Connection: 1/2" NPT. 140 115/60/1

^{*}NOTE: Overlay models have black powder coated steel exteriors.



15" OVERLAY PANEL DOOR CLEAR ICE MACHINE — ADA

TUIADA-15-RS/LS-A \sim O — (shown with a $\frac{3}{4}$ " cabinetry panel)

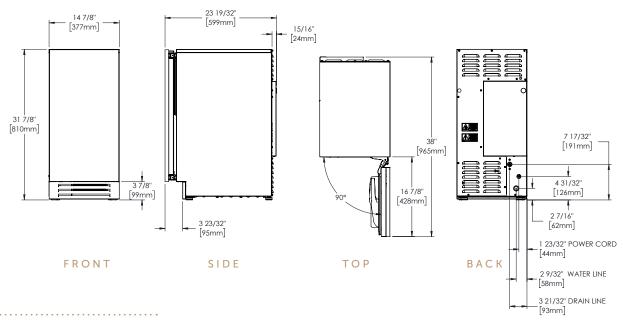

OPENING DIMENSIONS



MODEL OPTIONS

MODEL	FINISH
TUIADA-15-RS-A~0	Overlay panel right-hinged
THADA 15 LO A O	Overlan and left him and
TUIADA-15-LS-A~0	Overlay panel left-hinged

ACCESSORIES (OPTIONAL)

[Descaling solution
F	Replacement water filter
	• • • • • • • • • • • • • • • • • • • •
A	Anti-condensation pads

WARRANTY

3 year full (parts & labor) 6 year sealed system (parts & labor)

2001 East Terra Lane I O'Fallon, MO 63366-4434 I p 636.240.2400 I f 636.272.7546 I true-residential.com I info@true-residential.com