



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville
Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

Italian Glass 26 " Refrigerated Display Case

Ideal for both Bakery & Deli Merchandising

Designed for customers looking for rich, up-scale Italian styling for maximum visual appeal that will drive product sales.



Model ITR4834-B18
Shown with optional laminate

OPTIONAL ACCESSORIES

- ☐ Special Base Laminates
- ☐ Condensate Pump for self-contained cases
- ☐ Condensate pan for remote cases
- ☐ Cord & Plug (SC models only)
- ☐ Stainless Steel Shelving
- ☐ Reflective Ends
- ☐ 4"/102mm Casters
- ☐ Recessed Casters
- ☐ 6"/152mm Legs With or Without Skirt
- ☐ Rear Wrap board
- ☐ Remote Condensing Unit (EEV Included)
- ☐ Joining Kit for Continuous Line-Ups
- ☐ Reflective Rear Doors
- ☐ Front Air Intake & Discharge

MODEL

DIMENSIONS

(Includes End Panels)

☐ ITR3626-B18

36 x 30.75 x 44 (in)
914 x 781 x 1118 (mm)

☐ ITR4826-B18

48 x 30.75 x 44 (in)
1219 x 781 x 1118 (mm)

☐ ITR6026-B18

60 x 30.75 x 44 (in)
1524 x 781 x 1118 (mm)

STANDARD FEATURES

Model Features

- Powder coated steel base construction with a choice of six standard laminates
- Stainless steel interior
- All tempered thermo-pane glass construction
- Tilt out front glass for easy cleaning
- Removable sliding glass rear doors
- Adjustable Leg Levelers
- Rear air intake and discharge.

Refrigeration

- Electronic temperature control with demand defrost
- PTC Condensate evaporator provided for a totally self-contained system.
- Condensate pump standard with remote cases
- Easily accessible light switch, power switch, and electronic temperature control
- Average product temperature of 38°F (3.3°C) to 40°F (4.4°C)
- R290 Refrigerant

Shelving

- Adjustable tempered glass shelves. Shelves are adjustable up and down and can be tilted in two positions (0°/5° angle)
- Two tiers of shelves

Lighting

- 3500K LED top light and shelf lights
- DLC Certified, IP66 rated

Agency Approvals

- UL, C-UL, and UL Sanitation Listed to NSF-7, Type I conditions
- DOE 2017 Compliant



Note: Information is subject to change at any time. Visit www.federalind.com For the most current specs.

AIA #

Italian Glass 26" Refrigerated Display Case

SIS #

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.


Zone	Intended product to be displayed	Avg prod temp °F / °C
All	Unpackaged Refrigerated Products / All Foods & Beverages	38°F / (3.3°C)

DIMENSION: xx"/(mm)

SYMBOL KEY:
 ELECTRICAL JUNCTION BOX
 (SUPPLIED W/6' LEADS OR POWER CORD)

 TUB DRAIN LOCATION

 REMOTE REFRIGERATION
LINE CONNECTION

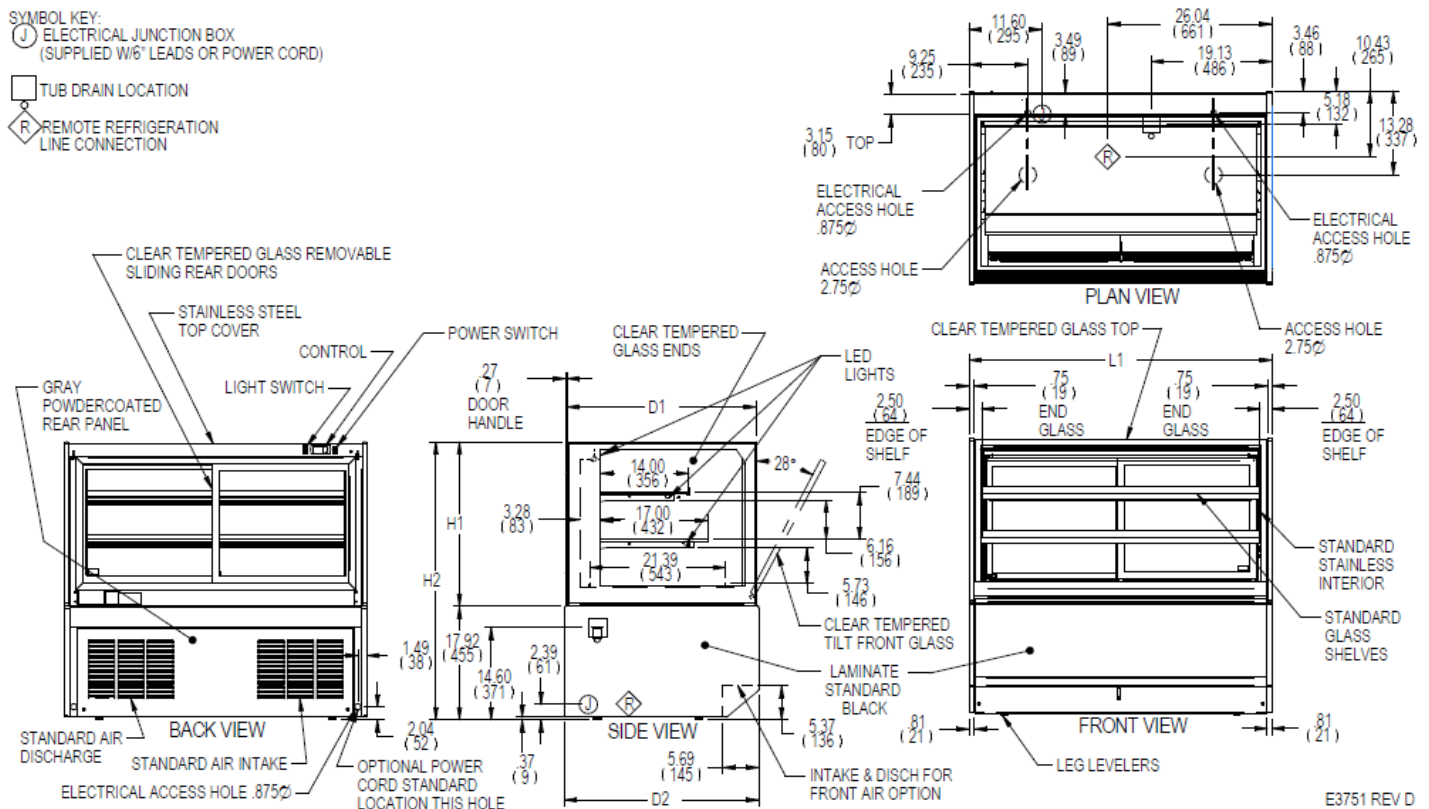

E3751 REV D

MODEL	DIMENSION					# OF TIERS	SHELVING			DISPLAY AREA SQ IN	INTERIOR VOLUME CU FT	SELF CONTAINED						REMOTE					
	L	D1	D2	H1	H2		DT	DB	L1			PERMANENT 2-WIRE + GROUND	OPTIONAL NEMA CORD & PLUG	REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT	PERMANENT CONNECT 2-WIRE + GROUND	REFRIGERANT	CONDENSATE REMOVAL	SHIP WEIGHT			
	in	in	in	in	in		in	in	in			120/60/1	2-WIRE + GROUND			LBS	120/60/1			LBS			
	mm	mm	mm	mm	mm		mm	mm	mm			AMPS	MAX FUSE SIZE			KILO	AMPS			MAX FUSE SIZE	KILO		
	mm	mm	mm	mm	mm		mm	mm	mm			mm	mm			mm	mm			mm	mm	mm	mm
ITR3626-B18	36.00	30.00	30.75	26.00	44.00	2	14	17	30.88	1630 SQ IN	11.4 CU FT	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	625 LBS 283 KILO	3.0	15	R449a	CONDENSATE E PUMP	600 LBS 272 KILO	
ITR4826-B18	48.00	30.00	30.75	26.00	44.00	2	14	17	42.88	2240 SQ IN	15.4 CU FT	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	680 LBS 308 KILO	3.0	15	R449a	CONDENSATE E PUMP	630 LBS 286 KILO	
ITR6026-B18	60.00	30.00	30.75	26.00	44.00	2	14	17	54.88	2850 SQ IN	19.0 CU FT	12.4	20	NEMA 5-20P	R290	CONDENSATE PAN	820 LBS 372 KILO	3.3	15	R449a	CONDENSATE E PUMP	770 LBS 349 KILO	
	1524	762	781	660	1118		356	432	1394														

- Refrigerated cases are designed to operate in a maximum of 80°F (27°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- Packaged food products placed in case must be pre-chilled before placing in case.



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com