

DSL-R-G Reach-Ins

Reach-In Refrigerators with Glass Doors

DSL-R-G Reach-Ins

Models

- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| ☐ DSLR1-G | ☐ DSLR2-G | ☐ DSLR3-G |
| ☐ DSLR1-GH | ☐ DSLR2-GH | ☐ DSLR3-GH |



DSL2-G

Standard Features

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- R-290 refrigerant
- Hot gas condensate evaporator
- Adaptive defrost
- Refrigerator capable of maintaining product temperature 36°F to 38°F
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

Options & Accessories

- Laminate – front, ends, shroud
- Heat shield end – max temp 400 degrees
- Trim strips

Specifications


Refrigeration system: All components are mounted to the top cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R290 refrigerant is used. System has the capability of maintaining between 36°F and 38°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. Utilizing a variable speed compressor, the system provides maximum efficiency and reduced energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.




R290




DSL-R-G Reach-Ins

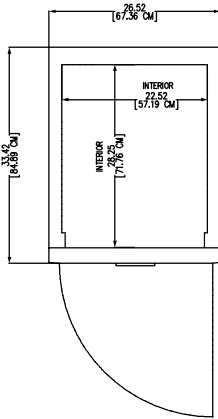



DSL-R1-G

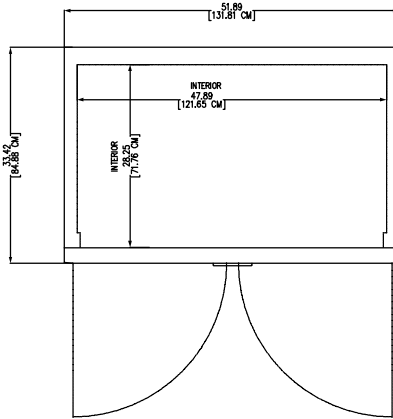

DSL-R2-G

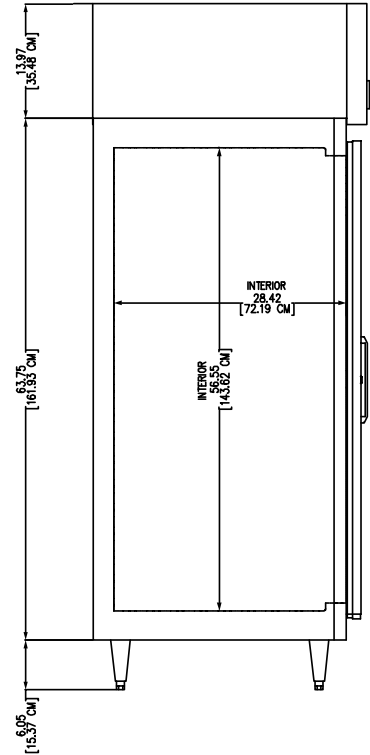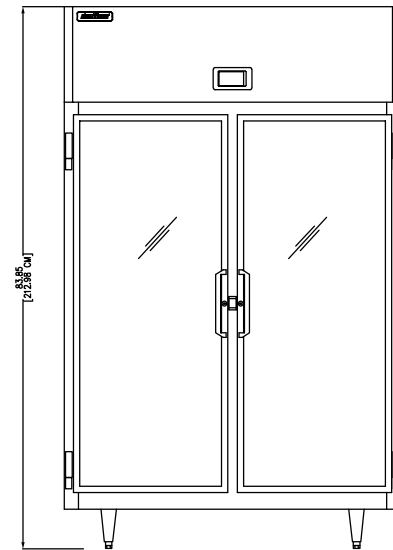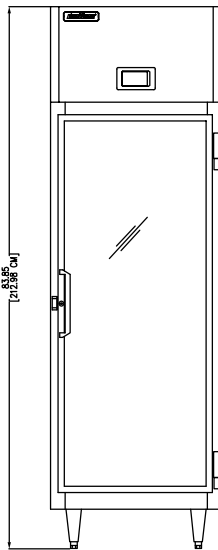


DSL-R3-G

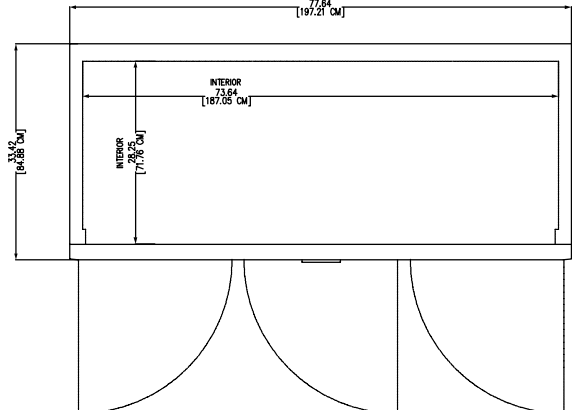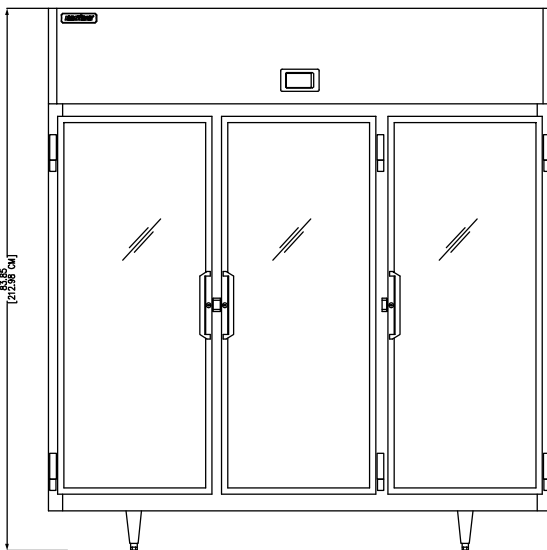

Welbilt reserves the right to make changes to the design or specifications without prior notice.

DSL-R-G Reach-Ins

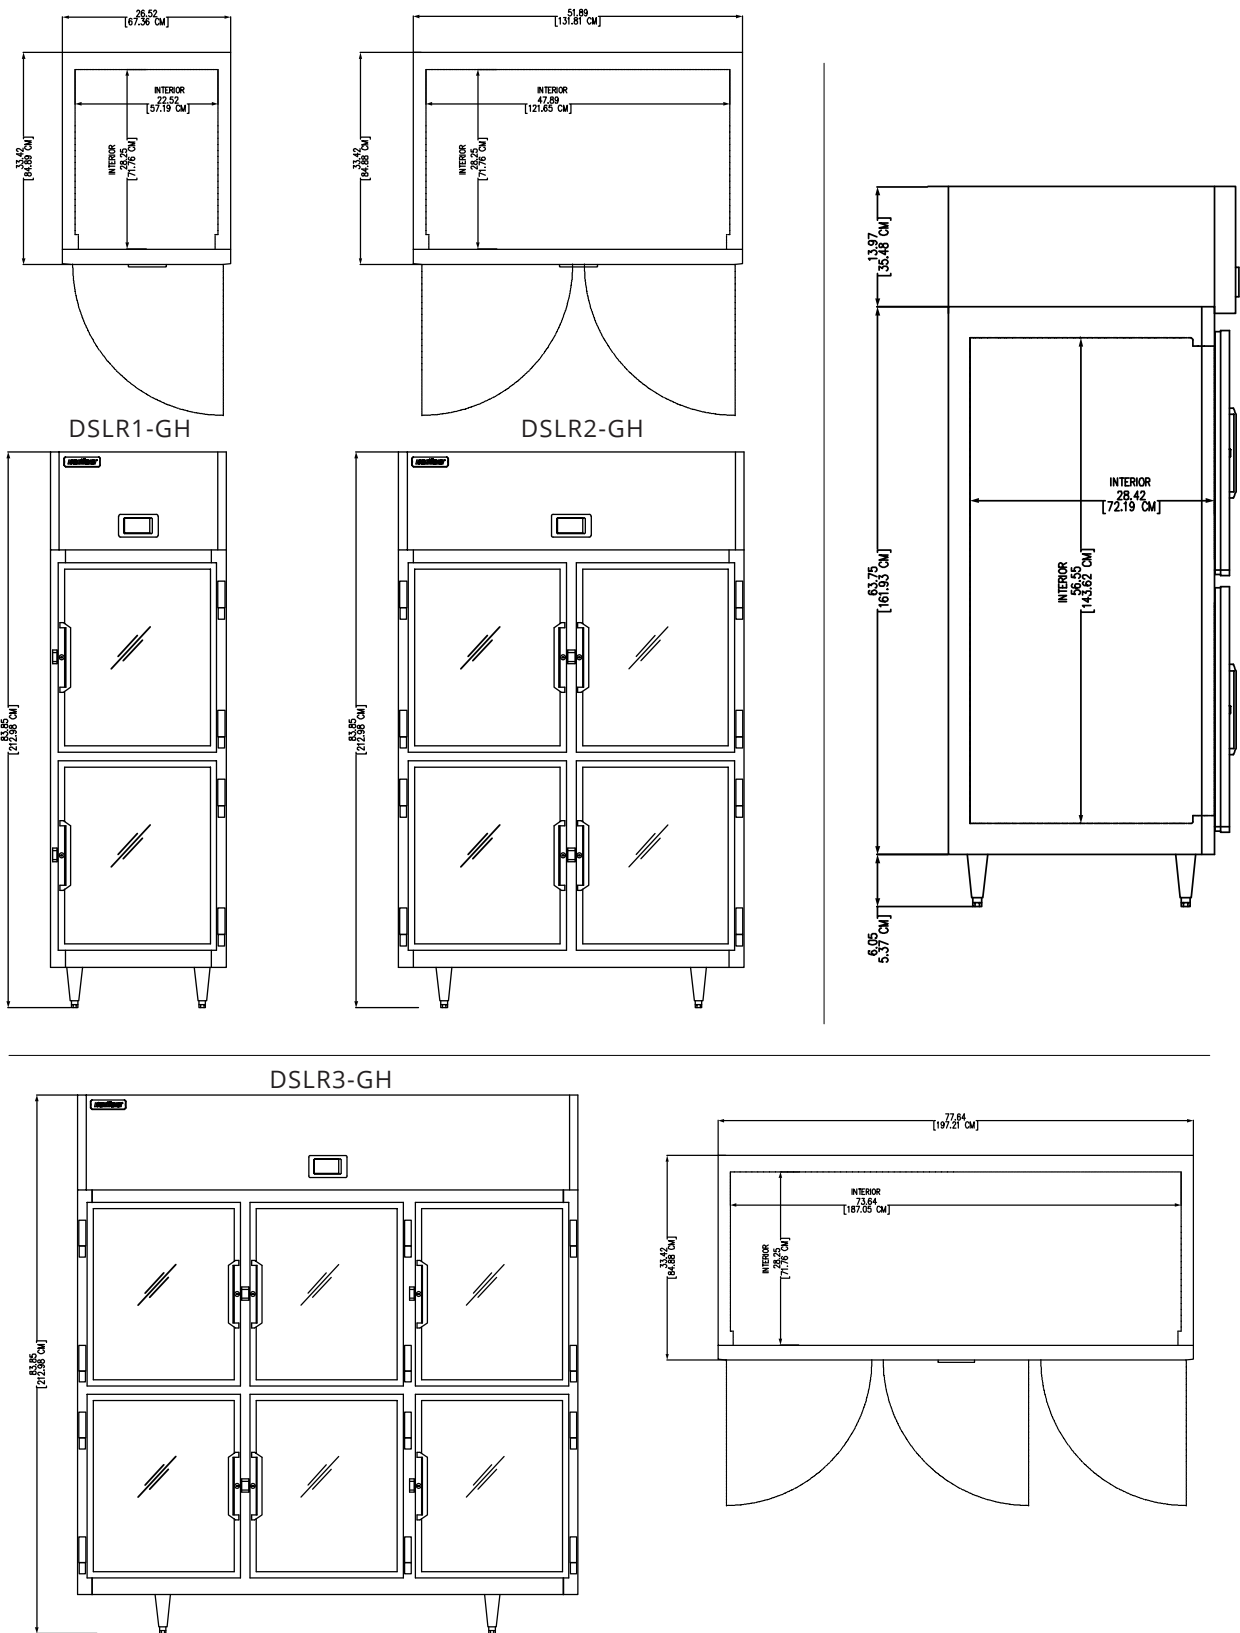

Welbilt reserves the right to make changes to the design or specifications without prior notice.

NOTE: 12" top clearance is required.

NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Delfield recommends using either an Eaton SGF20 or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

Specifications								
Model	V/Hz/Ph	Amps	Volume Cu. Ft.	No. of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug
DSL-R1-G	115/60/1	6.5	21	3	1/3	2800	408 lbs	5-15P
DSL-R1-GH	115/60/1	6.5	21	3	1/3	2800	408 lbs	5-15P
DSL-R2-G	115/60/1	6.5	44.57	6	1/3	2800	576 lbs	5-15P
DSL-R2-GH	115/60/1	6.5	44.57	6	1/3	2800	576 lbs	5-15P
DSL-R3-G	115/60/1	6.5	68.34	9	3/4	4950	800 lbs	5-15P
DSL-R3-GH	115/60/1	6.5	68.34	9	3/4	4950	800 lbs	5-15P

Welbilt reserves the right to make changes to the design or specifications without prior notice.