Rapide Cuisine® Countertop Induction Ranges

Models: IRNG-PC1-14, -18

Hatco's patented Rapide Cuisine® Countertop Professional Induction Range is designed and built for the rigors of commercial foodservice use. Its Magnetic Power System (MPS) delivers the highest power in its class!

It has brains and beauty with a sleek, modern, low-profile design, high resolution color display, timer, plus convenient power and temperature modes. All this and energy efficient too!

Standard features:

- Tough enough for back-of-the-house cooking and prep areas but is still easily portable and adaptable for buffets and many other front-of the-house applications

- High resolution TFT (thin film transistor) display instantly advises the operator of precise power (1 to 100), temperature (F° or C° in one degree increments) and time control (30 seconds to 10 hours)

- Programmable mode where the operator can create preset programs for consistent cooking cycles

- Easy to use, color-coded selectable functions

- Adaptive control knob adjusts to user input. From precise, fine control (slow turns) to spanning the full range in a single twist (fast turns)

- Elegant, contemporary, low-profile design with a choice of color combinations to match your décor

- Pan Sense Technology (PST) activates the unit only when a suitable pan is placed on top

- Black glass-ceramic top is durable and easy to clean – fully-sealed top and conformal coated boards adds extra protection against grease or moisture

- Automatic shut-off to prevent overheating

- Withstands high ambient kitchen temperatures

- USB port for downloading updates

- 71" (1800 mm) cord with plug

IRNG-PC1-18 shown in standard finishes

Includes a food temperature probe which facilitates highly accurate cooking

Options (available at time of purchase only)

Housing Color for Countertop Range
    Top housing: Stainless Steel (standard)
    Bottom housing: Gloss Finish Bold Black (standard)

    For IRNG-PC1-18:

☐ Top housing: Gloss Finish Bold Black
    Bottom housing: Gloss Finish Bold Black

For operation, location and safety information, please refer to the Installation and Operating Manual.

IRNG-PC1 Model

13" (330 mm)
Cooking Surface

12" (304 mm)

FRONT VIEW

17" (431 mm)

Cook Surface
12.09" (307 mm)

3.4"
(86 mm)

13.35" (339 mm)
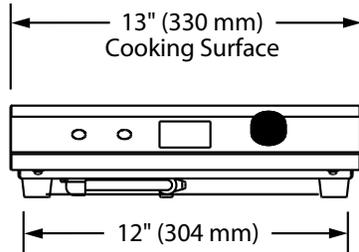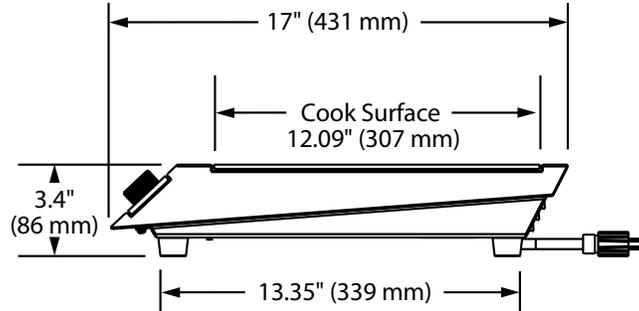
SIDE VIEW

SPECIFICATIONS
Countertop Induction Ranges

Model	Dimensions (Width x Depth x Height)	Volts	Phase	Watts	Amps	Plug	Cord Location	Ship Weight[†]
IRNG-PC1-14	13" x 17" x 3.375" (330 x 431 x 86 mm)	120	Single	1440	12.0	NEMA 5-15P	Rear left bottom base corner	17 lbs. (8 kg)
IRNG-PC1-18[§]	13" x 17" x 3.375" (330 x 431 x 86 mm)	120	Single	1800	15.0	NEMA 5-15P	Rear left bottom base corner	17 lbs. (8 kg)

[†] Shipping weight includes packaging and is approximate.

[§] Not available for Canada.

PAN SIZE
Maximum Pan Size: 13" diameter (330 mm), Minimum Pan Size: 4" diameter (102 mm)

PLUG CONFIGURATIONS
NEMA 5-15P

PRODUCT SPECS
Rapide Cuisine® Countertop Induction Ranges

The Countertop Induction Range shall be a Rapide Cuisine® model, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Induction Range shall be rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width. The Countertop Induction Range shall consist of a stainless steel housing with an aluminum base with a single generator coil and a glass ceramic top surface. It includes a tempered glass control panel, 0-100% power levels and temperature control in F° or C°, plus color coordinated display and controls. The range will be controlled via an infinite control and feature a USB port for updates and future access to additional operating modes. A food temperature probe and 71" (1800 mm) cord and plug is included.

Warranty consists of 24/7 parts and service assistance (US and Canada only).