



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



E-3-CBSS

OPTIONS:

- 14 gauge tops
- 1/2" poly cutting surface added to integral top
- Backsplash
- Recessed top (to accommodate griddles, fryers, etc.)
- Adaptor plates
- 3-phase wiring
- 6', 8' or 10' Cord and plug
- Standard intuitive, easy to use touch screen control
 - One control for all wells standard indent box below touch screen. Touch screen controls use NEMA 14 plug, contact factory for details.
- Heated base module
- Electric outlet in base
- Sliding Doors
- Pass-thru construction
- Veneered plastic laminate panels on body
- Powder coat paint in 12 colors
- Casters (add cord and plug), 5" swivel with locks
- Food shields
- Tray slides
- Work shelves
- Customer side Kickplates - Stainless steel or Painted
- 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Steamtables Hot Food Units - Electric - Standard

- E-2-CBPG/E-2-CBSS 2 top openings
- E-3-CBPG/E-3-CBSS 3 top openings
- E-4-CBPG/E-4-CBSS 4 top openings
- E-5-CBPG/E-5-CBSS 5 top openings
- E-6-CBPG/E-6-CBSS 6 top openings

TOP:

- 16 gauge 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- 6 1/2" deep Sealed wells with drains
- Wet or Dry operation
- Fully Insulated Wells
- Copper manifolds and brass master valve
- 750 or 1200 watt elements
- 120, 208 or 240 volt A/C
- Master Toggle Switch w/ indicator light for entire unit
- Single Phase standard

BODY AND INTERIOR SHELF:

- Stainless Steel body
- Painted body w/ choice of 12 powder coat colors
 - Stainless Steel Front Panel w/ control knobs
 - Wire knob guards
 - Full bottom shelf to match body
 - 6" polished stainless steel adjustable legs

Certifications



Specification subject to change



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax


www.dukemfg.com

SS-1098 Thurmaduke Hot Holding Electric - Standard

REV F 12/16/2025

Thurmaduke®

Steamtables Hot Food Units - Electric - Standard

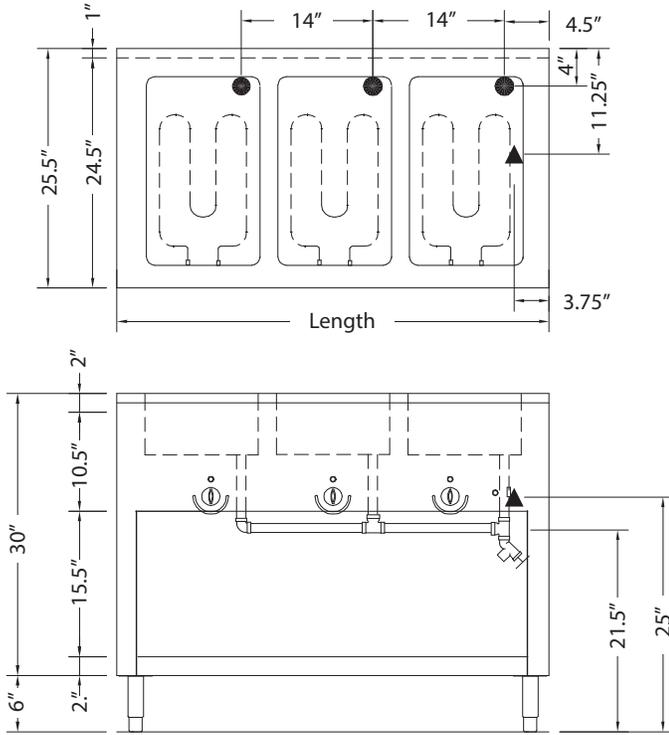

LEGEND	
▲	ELECTRICAL CONNECTION
●	DRAIN LOCATION

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Depth		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
E-2-CBPG	E-2-CBSS	32	81.3	25-1/2	64.8	36	91.4	2	28.1	210	95.5
E-3-CBPG	E-3-CBSS	46	116.8	25-1/2	64.8	36	91.4	3	39.6	264	120.0
E-4-CBPG	E-4-CBSS	60	152.4	25-1/2	64.8	36	91.4	4	51.2	344	156.4
E-5-CBPG	E-5-CBSS	74	188.0	25-1/2	64.8	36	91.4	5	62.3	433	196.8
E-6-CBPG	E-6-CBSS	88	223.5	25-1/2	64.8	36	91.4	6	74.3	527	239.6

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Cord & NEMA plug NOT included

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-CBPG/SS	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
E-3-CBPG/SS	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
E-4-CBPG/SS	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
E-5-CBPG/SS	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30
E-6-CBPG/SS	N/A			4500	21.6	L6-30	4500	18.8	L6-30

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E-2-CBPG/SS	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
E-3-CBPG/SS	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
E-4-CBPG/SS	N/A			4800	23.1	L6-30	4800	20	L6-30
E-5-CBPG/SS	N/A			6000	28.9	6-50	6000	25	6-50
E-6-CBPG/SS	N/A			7200	34.6	6-50	7200	30	6-50



Duke Manufacturing Co.
 2305 N. Broadway
 St. Louis, MO 63102

Phone: 314-231-1130
 Toll Free: 1-800-735-3853
 Fax: 314-231-5074

www.dukemfg.com