

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Column Towers



CT-3-SS  
 NOTE: Faucet handles not included.



**Intertek**  
 4004503  
 Conforms to NSF/ANSI STD 18



CT-3-SS with optional Rinser Faucet Extension



CT- - -

**Size:** Specify the number of faucets from 1 to 3.

**Finish:**  
 SS = Grainline  
 MF = Mirror  
 PB = Brass

### Standard Features

- All stainless steel construction
- Integral surface mount drain pan with lift-out perforated insert
- 1/4" shanks with 3/16" restriction lines
- Available with eco friendly foamed-in-place cold plate assembly for recirculating system. Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion.
- All models include all stainless steel faucets and shanks
- Unique internal support system for solid mounting
- Base plate serves as template for hole cutting

### Configurable Options

- 1, 2, or 3 faucets
- Grainline finish, mirror finish, or brass finish\* (\*NOTE: Brass finish towers provided with mirror finish drain pan and brass finish perforated insert)
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

### Specifications

- Drains**
- Drain pan models - 1/2" tailpiece

- Materials**
- 20 gauge stainless steel parts include: head, column, drain pan, and perforated inserts
  - 16 gauge stainless steel parts include: inner column stiffener brackets
  - 16 gauge galvanized steel parts include: base plate and faucet stiffeners
  - 11 gauge stainless steel parts include: inner column base plate

- Shank Sizes**
- 1/4" I.D. with 3/16" fittings

- Rinser Faucet (optional)**
- Accepts 3/8" cold water lead
  - 30 psi water pressure regulator included
  - 1.2 gallons per minute

### Optional Rinser Faucet

- Installation Notes**
- Unit does not provide a 1" air gap
  - Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
  - Install in-line water pressure regulator (included)
  - A separate shut-off valve is recommended (not included)

03012383  
 Rinser Faucet  
 Assembly



**Intertek**  
 4004503  
 Conforms to  
 NSF/ANSI STD 372

**NOTE: Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.**

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>


<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
---	-----------------

Specifications subject to change without notice. For current specifications please visit our website.


# Column Towers

## Drawings


NOTE: Faucet handles not included.

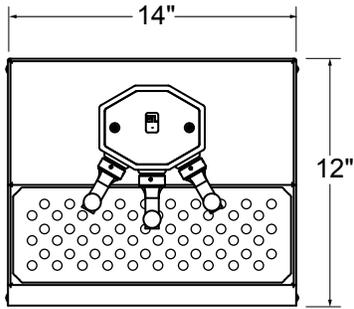

PLAN VIEW

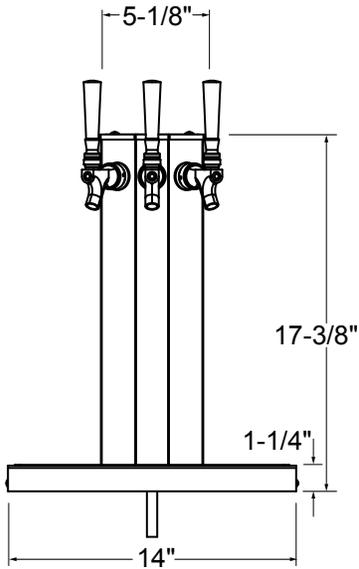


FRONT ELEVATION

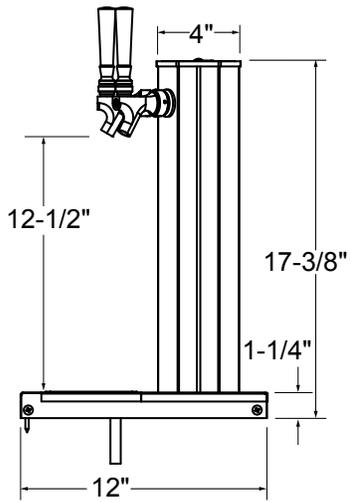


SIDE ELEVATION


## RF - RINSER FAUCET

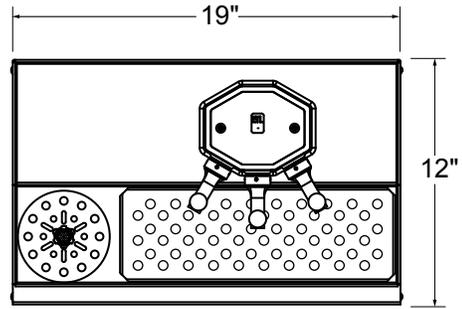

PLAN VIEW

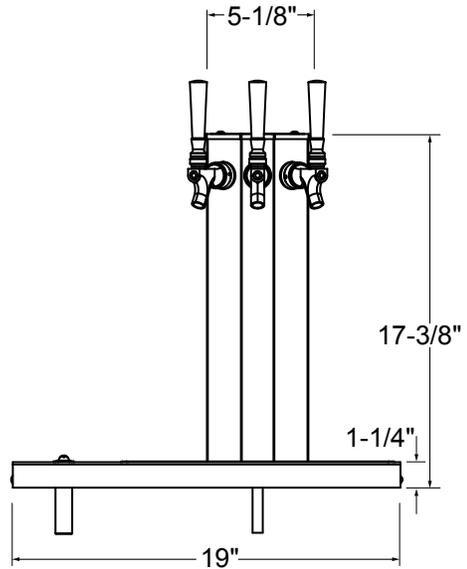

FRONT ELEVATION

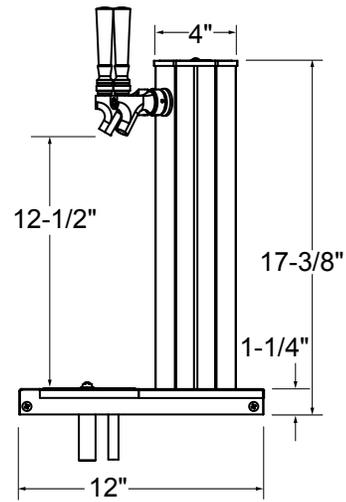

SIDE ELEVATION