

ACCESSORIES

Accessories ISS by **SPG**


Shelf Ledges

- Keeps items from falling off shelves
- Ledges mount to posts and can be used with all ISS shelves
- Height: 6"
- Ledges can be stacked on top of each other for additional height

Model No.*	Fits Shelf Width or Length (In.)	Weight (Lbs.)
LU14	14	1/2
LU18	18	1/2
LU21	21	3/4
LU24	24	1
LU30	30	1 1/2
LU36	36	1 1/2
LU42	42	2
LU48	48	2
LU54	54	2 1/4
LU60	60	2 1/2
LU72	72	3

*Select a finish. Add suffix to model number.

Finish	Suffix
Plating Plus™	C
Grey Bond®	E
Gold Bond®	Y

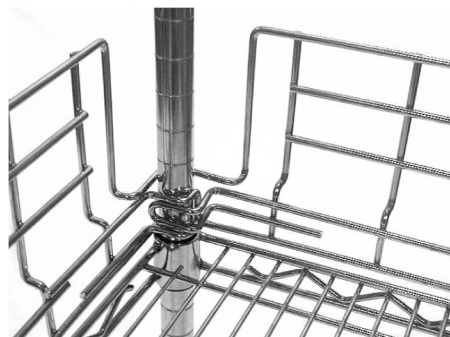


Side & Back Ledges

Clamps, Clips & Foot Plates

Model No.	Description	
PC2	Post Clamps	Joins 2 Posts Side-By-Side
MFP1*	Modified Foot Plate	May Be Bolted To Floor
MMFP1*	Half Modified Foot Plate	May Be Bolted To Floor

*Select a finish. Add suffix to model number.

Finish	Suffix
Plating Plus™	C
Grey Bond®	E
Gold Bond®	Y



Post Clamps
PC2



Modified Foot Plate
MFP1C



Half Modified
Foot Plate
MMP1C

Shelf Dividers

- Maintain separation of goods with shelf dividers
- Height: 8"

Model No.*	Length (In.)	Fits Shelf Width (In.)	Width (mm.)	Weight (Lbs.)	Weight (Kg.)
SDU14	13 1/4	14	356	3/4	0.3
SDU18	17 1/4	18	457	1	0.4
SDU21	20 1/4	21	533	1	0.4
SDU24	23 1/4	24	610	1 1/4	0.5

*Select a finish. Add suffix to model number.

Finish	Suffix
Plating Plus™	C
Grey Bond®	E
Gold Bond®	Y



Shelf Dividers

Stem Casters

- Use stem casters to add shelving mobility and increase efficiency
- Stem casters are load rated for 75 to 300 lbs
- Three caster styles available: swivel only, swivel with brake, and rigid
- Three types of tire treads available: Resilient Rubber, Polyurethane, and Conductive
 - Resilient casters are great for use on rough flooring as they are long lasting, quiet and inexpensive

- Polyurethane casters are non-marking and prevent undue wear on carpets and floors. They are suited to demanding environments such as extreme temperatures and the presence of solvents or organic chemicals
- Conductive casters are designed for dissipation of static charge build-up in computer, electronic or medical applications

- The forks of all stem casters are plated steel except for models CM6PS and CM6PSB which are stainless steel

Swivel Model No.	Swivel With Brake Model No.	Rigid Model No.	Dia. (In.)	(mm.)	Face In. (mm.)	Load Rating (Lbs.)	(Kg.)	Wheel Material	Weight (Lbs.)	(Kg.)
CM5M	CM5MB	CM5MR*	5	127	1 1/4 32	200	91	Resilient Rubber	2 3/4	1.2
CM5P	CM5PB	CM5PR*	5	127	1 1/4 32	300	136	Polyurethane	3	1.4

*Caster channel required. Order separately; see below.



Swivel Caster with
brake



Swivel Caster