



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Countertop Refrigerated Display Cases - Curved/Square

Standard Features


- Stainless steel exterior & interior with black frames
- Rear mount compressor with environmentally friendly R290 refrigerant
- Electronic Temperature Controller
- Two (2) stainless steel shelves standard
- Defog feature to ensure the glass stays clear
- Maintains temperatures between 35°F – 38°F
- Magnetic door gasket(s) standard for positive door seal
- Two (2) rear sliding doors
- LED interior lighting
- Leveling legs
- NEMA 5-15 plug

MODELS:


CRDC-35 / CRDC-46 / CRDS-42 / CRDS-56



CRDC-35

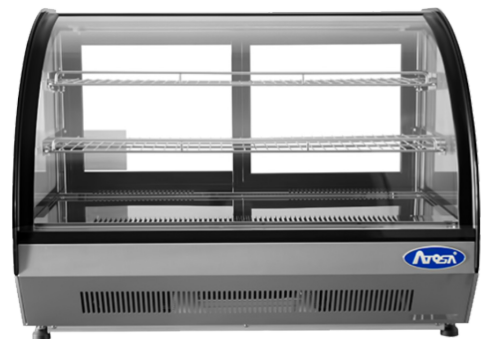

CRDC-46

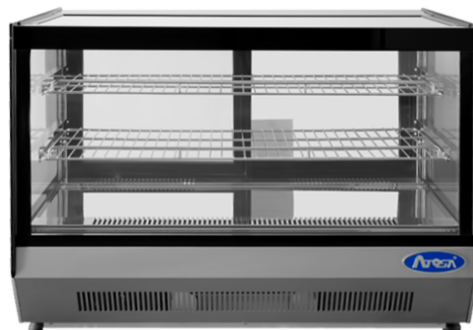

CRDS-56



CRDS-42

For the best results of food preservation we recommend
setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY



REV. 07/25



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com



California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS




Models	Door	Capacity (Cu.Ft.)	Shelves	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
CRDC-35	2	3.5	2	2	115/60/1	1/5	R290	27 ⁵ / ₈ ×22 ¹ / ₈ ×26 ⁷ / ₈	139	172
CRDC-46	2	4.6	2	2	115/60/1	1/5	R290	35 ¹ / ₂ ×22 ¹ / ₈ ×26 ⁷ / ₈	154	200
CRDS-42	2	4.2	2	2	115/60/1	1/5	R290	27 ⁵ / ₈ ×22 ¹ / ₈ ×26 ⁵ / ₈	143	192
CRDS-56	2	5.6	2	2	115/60/1	1/5	R290	35 ¹ / ₂ ×22 ¹ / ₈ ×26 ⁵ / ₈	165	214

PLAN VIEW

CRDC-35





CRDC-46






Side View

CRDS-42



CRDS-56




Side View

LED lights



NEMA 5-15P



NEMA
15A/125V