

PAN RACKS

ENCLOSED CABINET

KELMAX by
SPG



4H2223



ITEM # _____ MODEL # _____ QTY: _____
PROJECT: _____
OPTIONS: ☐ YES _____ ☐ NO _____

Standard Features & Benefits

- ◆ Perfect for food delivery and storage
- ◆ Great for areas where cabinets will be in public view such as hospital hallways or dining halls
- ◆ All welded aluminum construction with double pan top
- ◆ Tray spacing on 1" or 1 1/2" spacing depending on model
- ◆ Door opens a wide 270 degrees on stainless steel hinges
- ◆ Stainless steel gravity latch is drilled for padlock, bringing added security
- ◆ Heavy duty models have reinforced center supports and 5" x 2" casters standard for outstanding mobility
- ◆ Freight Class 300

Model No.	Tray Capacity	Spacing (in.)	D x L x H (in.) (mm.)		Weight (lbs.) (kg.)	
End Load- 1.5" Spacing						
4H2179	16	1 1/2	28 x 22 x 32	711 x 559 x 813	80	36
4H2187	24	1 1/2	28 x 22 x 44	711 x 559 x 1118	95	43
4H2193	32	1 1/2	28 x 22 x 56	711 x 559 x 1422	95	43
4H2200	40	1 1/2	28 x 22 x 68	711 x 559 x 1727	105	48
End Load- Heavy Duty- 1.5" Spacing						
4H2223	40	1 1/2	28 x 22 x 68	711 x 559 x 1727	115	52
Side Load- 1.5" Spacing						
4H2195	32	1 1/2	20 x 31 x 56	508 x 787 x 1422	92	42
End Load- Heavy Duty- 1.5" Spacing						
4H2229	60	1	28 x 22 x 68	711 x 559 x 1727	115	52

For SPG's complete product menu,
visit www.spgusa.com or call 877.503.4SPG (4774)

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP

PAN RACKS

SPECIFICATIONS

CONSTRUCTION:

Constructed of Heavy Duty extruded Type 6063 primary aluminum. Unit is all welded.

SIDEWALLS:

Welded to 1" x 2-1/2" channel. The compound guides are 1" or 1-1/2" on center with guides 5/8". Tongue and groove panels are continuously welded for maximum strength.

TOP:

Aluminum double pan design formed with four lips down and welded.

BACK WALL:

.090 thick aluminum

BASE:

.125 aluminum formed with four lips down and welded

CASTERS:

Unit comes standard with 5" x 1-1/2" plate caster bolted to the base

DOOR:

Constructed of 1/8" thick aluminum panel with a full 270-degree opening. Door held closed with stainless steel gravity latch


HINGES:

Three (3) double knuckle stainless steel hinges are bolted to the door (NSF approved)


Unit Options

Model No.	Description
/BK	Caster Brakes
/CB	Full Perimeter Bumper
/620U	6" Heavy Duty Polyurethane Swivel Plate Caster

To select an option, please contact factory for part number.

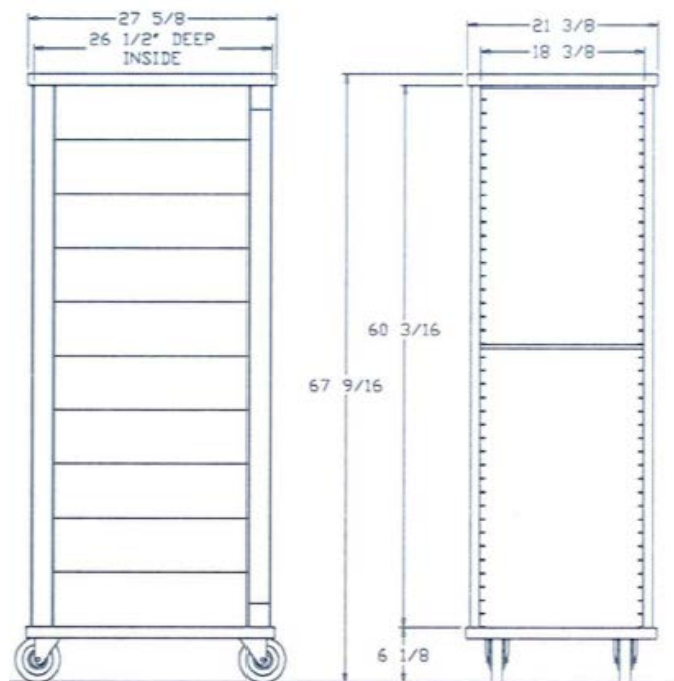

4H2223

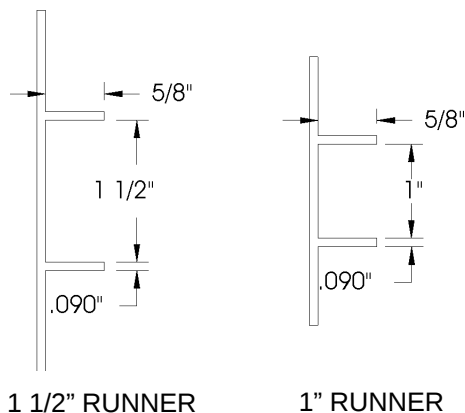

AMCO • Freestyle • ISS • Kelmax • LPI • Universal Stainless • Gillis-Jarke

SPG International, LLC
11230 Harland Drive NE
Covington, GA 30014
877-503-4SPG (4774)

www.spgusa.com

The best names in the business
all have one thing in common.

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP