

SLIMLINE DROP-IN SEALED WELL ELECTRIC UNIT



DISLSW-2-120 Shown

Item #: _____ Qty #: _____

Model #: _____

Project #: _____

FEATURES:

Fiberglass insulation between each compartment
12" x 20" die stamped openings
Full stainless steel construction inside and out
Remote control panel
Units are supplied with drains for wet applications
Includes 1" I.P.S. Drain(s) with Gate Valve

MATERIAL:

TOP: 18 gauge #304 stainless steel
with die stamped pan openings and self
rimmed. (12" x 20" opening)
BODY: 20 gauge galvanized



ELECTRICAL:

120V units yield 1100 Watts
208V/240V dual voltage units yield 825 Watts
at 208V and 1100 Watts at 240V
Infinite control knobs
Indicator lights

**Unit to be hard wired in the field. Optional
cord sets available, please consult the
factory for more information**

Model #	O.A. Length	O.A. Width	# of Wells	Cut-Out Size W x L	Volts	Amps	Watts	Approx. Wt.	Cu. Ft.
DISLSW-2-120	46-1/2"	16-1/2"	2	15-1/4" x 45-1/4"	120	18.33	2200	125 lbs.	12.8
DISLSW-3-120	68-1/2"	16-1/2"	3	15-1/4" x 67-1/4"	120	27.51	3300	150 lbs.	18.6
DISLSW-2-240	46-1/2"	16-1/2"	2	15-1/4" x 45-1/4"	208/240	3.94/9.16	1600/2200	125 lbs.	12.8
DISLSW-3-240	68-1/2"	16-1/2"	3	15-1/4" x 67-1/4"	208/240	11.90/13.34	2475/3300	150 lbs.	18.6
DISLSW-4-240	90-1/2"	16-1/2"	4	15-1/4" x 89-1/4"	208/240	15.88/18.32	3300/4400	174 lbs.	24.5

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures

Optional Accessories:


Visit our website for additional Accessories

SU-90

Automatically fills & maintains water level. For DISW, DISLSW, SW & HDSW Series. Requires Manifold Drain Assembly (Except HDSW series). See below.



Manifold Drains (Per Well)
Add The Suffix **-M** To The
Model Number.



Thermostatic Controls
Add The Suffix **-T** To The
Model Number.

Cord with NEMA Plugs

SU-P-234	8' Cord with NEMA 5-15P plug for 1 well, 120v Units	
SU-P-231	8' Cord with NEMA L5-30P plug for 2 or 3 well, 120v Unit	
SU-P-232	8' Cord with NEMA 6-20P plug for 1, 2, 3 or 6 well (6 well unit requires 2 Cords), 240v Units	
SU-P-233	8' Cord with NEMA L6-30P plug, for 4 or 5 well, 240v Units	

Adapter Bars

SU-45A 12" x 1" Adapter Bar.

3-Phase Upgrade

SU-72 Upgrade to 240 volt units
to 3 Phase Wiring.





DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

DISLSW-4-240 Shown

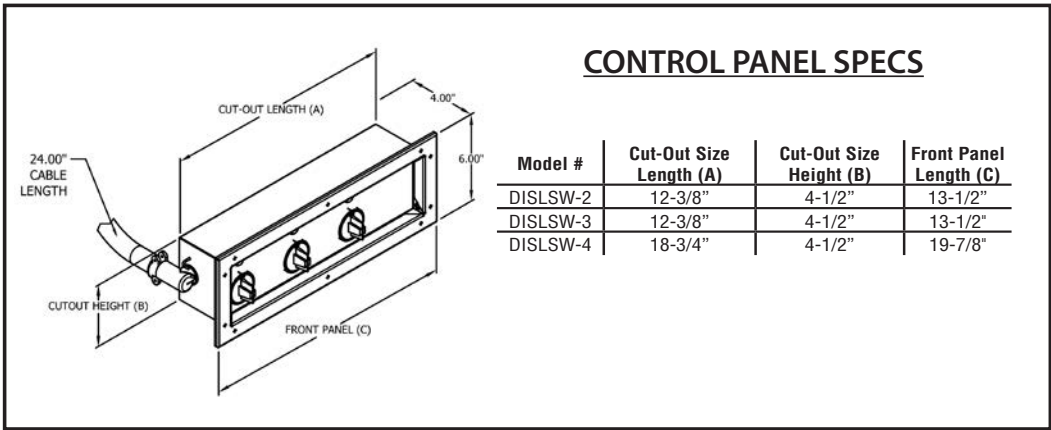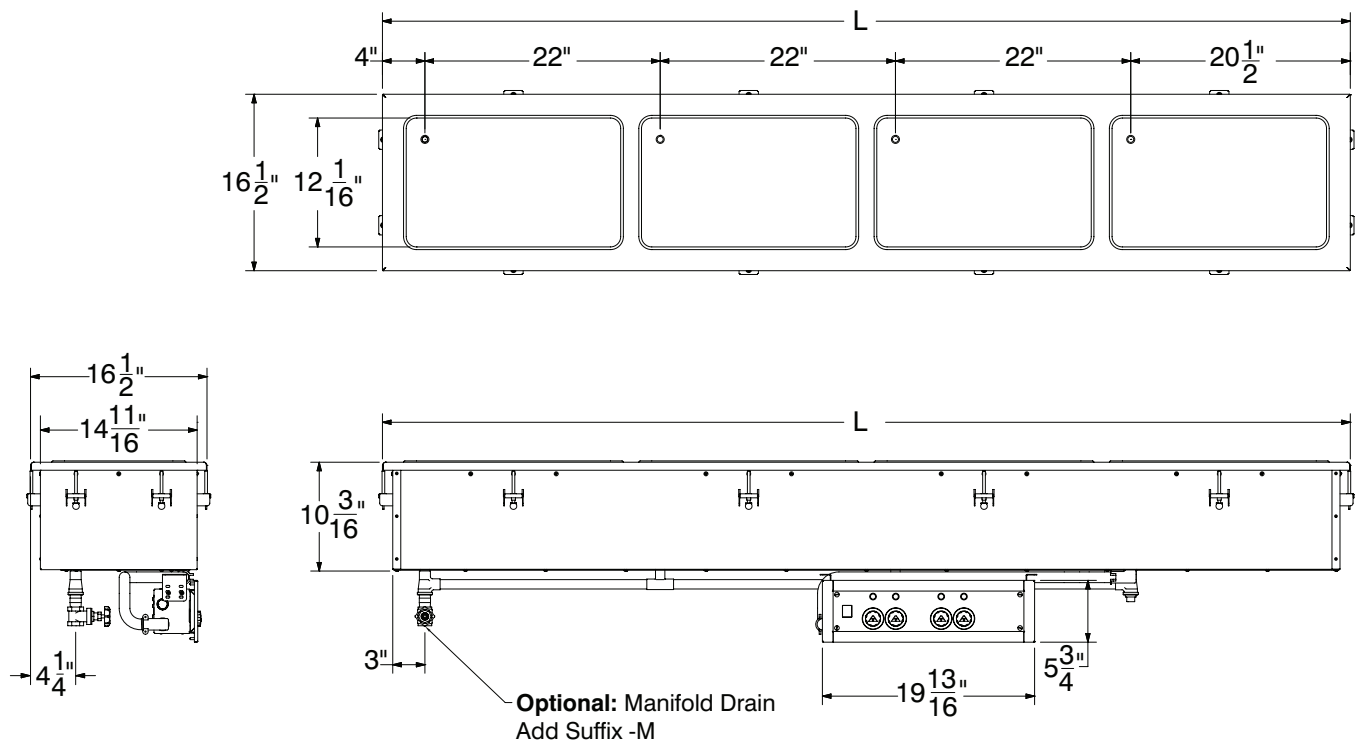

Unit to be hard wired in the field. See Accessories for optional Cords.
Please consult the factory for more information.

