

BLACK♦DIAMOND®

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 24" Standard Series Charbroiler, 2 Burners, in Stainless Steel

BDECTC-24/NG




Enhance your commercial kitchen with this 24-inch Black Diamond Charbroiler, designed for efficiency and durability. Built from stainless steel and cast iron, it withstands demanding environments. It features two burners, each providing 30,000 BTUs for powerful cooking. The charbroiler is equipped with manual ignition and control, ensuring precise operation. Cleaning is made easy with a removable drip tray, making it a practical choice for busy kitchens.

FEATURES AND CONSTRUCTION

- Made of durable stainless steel and cast iron for long-lasting use
- Delivers a powerful 60,000 BTUs for efficient cooking
- Features 2 burners for versatile cooking options
- Compact design perfect for countertop placement
- Equipped with 4 adjustable legs for stability
- Includes coupling adaptor and 3/4 inch gas connection for natural gas
- Manual ignition and control type for straightforward operation
- Wide temperature range to suit various cooking needs
- Heavy-duty construction ensures longevity
- Field convertible to liquid propane for flexible use

3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment
for details at 1-877-672-7740



INCLUDED COMPONENTS

- (4) Adjustable Legs
- (2) Gas Conversion Orifices
- (1) Relief Valve
- (1) Drip Tray
- (1) Raised Grill Plate





BLACK♦DIAMOND®

Black Diamond 24" Standard Series Charbroiler, NG

BDECTC-24/NG

FRONT

SIDE

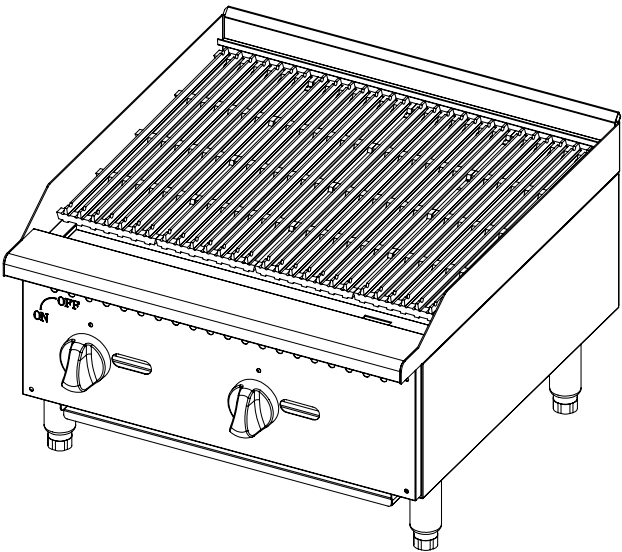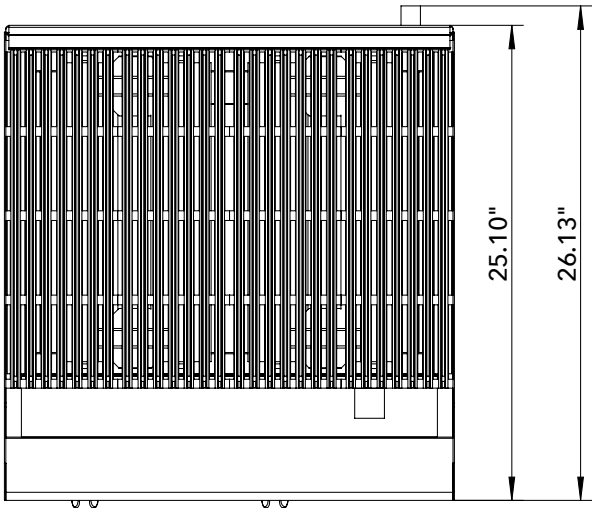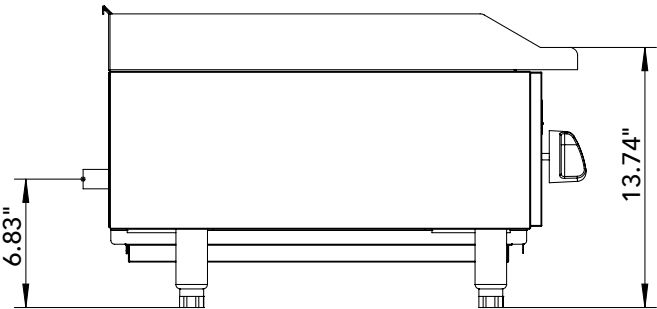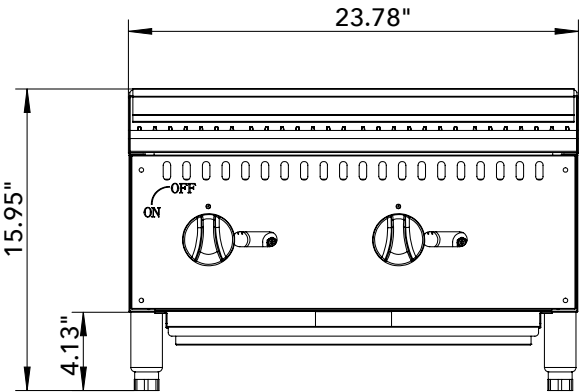

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	60000	2	Cast Iron	1	26.13" x 23.78" x 15.95"	95.9	131.2

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.