

# Drop-in Self-Leveling Dispensers

## Open, Shielded and Heated - Oval Plate

### Models

V4010, V4011, V4012, V4013, V4014  
 V5010, V5011, V5012, V5013, V5014  
 V6010, V6011, V6012, V6013, V6014



**Dispensing level is easily adjusted by attaching or detaching springs - no tools required.**

- Models available to fit oval plates from 9¾ long" to 14½ long"
- All models have a 25" stacking capacity
- Easy-Glide™ design provides quiet, non-stick operation
- Heated dispensers feature thermostatic control. Thermostat minimum 100°F (38°C) -maximum 175°F (79°C)
- High-strength welded stainless steel frame

### Specifications

Unit is of welded stainless steel construction to dispense oval plates. Dispensers hang from surface opening by a 14-gauge flange rim and feature four each 18-gauge vertical corner supports welded to 18-gauge bottom plate. Self-leveling dish carriage is of welded stainless steel construction travel vertically in dispenser tube with nylon roller guides for smooth operation. Carriage has 20-gauge removable dish platform. Unit features flange mounted extension springs on two sides, which are detachable from the dish carriage to provide tension adjustment without tools for different weight dishes. Unit has a vertical stacking capacity of 25" (635 mm). Shielded and heated models have a 24-gauge skin enclosure Unit is NSF listed.

Heated Models Only: Unit is 120 VAC 60 Hz and has 5' (1524 mm) power supply cable with L15-5P NEMA twist lock plug for 120 VAC. Dispenser tubes are fully enclosed in 24-gauge stainless steel, and have a circular bottom mounted 450 watt heater element to provide convection heat. Heating system features thermostatic control in a tamper-protective location with safe high-end shut-off. Control has infinite settings between low and high temperature cut-outs. Thermostat is field adjustable for average interior air temperature between 100° F (38° C) and 175° F (79° C) at middle adjustable thermostatic setting. On-off switch and power indicator light are mounted on top flange of dispenser for easy access and visibility. Average dish temperature rise of 40° F (22° C) above ambient is achieved within one hour of initial heating cycle at middle adjustable thermostatic setting. Unit is UL listed.

### Options

- 208/240 VAC 60Hz (heated models)
- 220 VAC 50 Hz (heated models)

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.


800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com

# Drop-in Self-Leveling Dispensers

Open, Shielded and Heated - Oval Plate

## Models

V4010, V4011, V4012,  
V4013, V4014, V5010,  
V5011, V5012, V5013,  
V5014, V6010, V6011,  
V6012, V6013, V6014

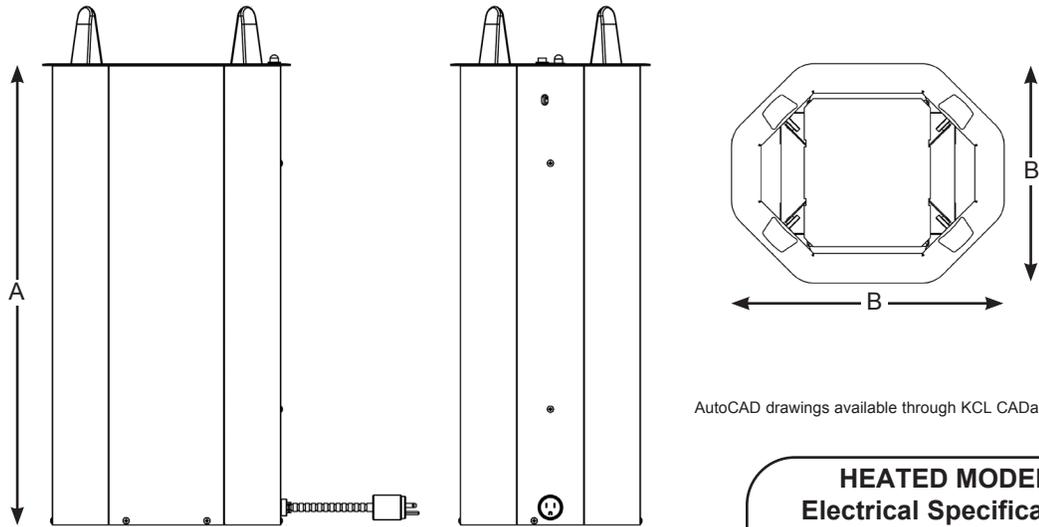


AutoCAD drawings available through KCL CADalog

**HEATED MODELS**  
**Electrical Specifications**  
450 Watts, 3.8 Amps, 120 VAC


## Dimensions

### Counter Cutout Diagrams


V4010, V5010, V6010

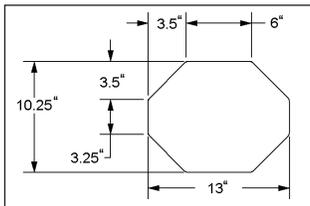



V4011, V5011, V6011

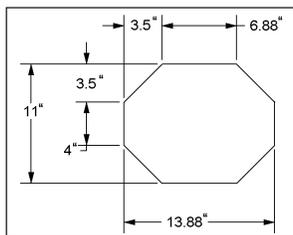

V4012, V5012, V6012

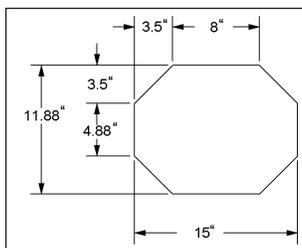

V4013, V5013, V6013

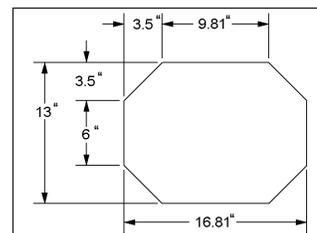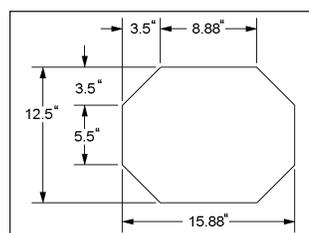

V4014, V5014,  
V6014

Measurements in ( ) denote metric millimeters, unless otherwise specified.

Model	Accommodates Oval Plate Size	Height To Rim (A)	Top Rim Size (B)	lbs.	(kg.)
<b>Open Models</b>					
V4010	6 <sup>3</sup> / <sub>4</sub> " x 9 <sup>3</sup> / <sub>4</sub> " to 7 <sup>3</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>2</sub> "	27 <sup>3</sup> / <sub>4</sub> " (705)	11-3/8" x 14-1/2" (290 x 368)	18	(8.2)
V4011	8" x 10 <sup>3</sup> / <sub>4</sub> " to 8 <sup>1</sup> / <sub>2</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	27 <sup>3</sup> / <sub>4</sub> " (705)	12-1/8" x 15-1/8" (309 x 384)	20	(9.1)
V4012	8 <sup>3</sup> / <sub>4</sub> " x 11 <sup>3</sup> / <sub>4</sub> " to 9 <sup>1</sup> / <sub>4</sub> " x 12 <sup>1</sup> / <sub>2</sub> "	27 <sup>3</sup> / <sub>4</sub> " (705)	13" x 16-1/4" (330 x 413)	22	(10.0)
V4013	9 <sup>1</sup> / <sub>2</sub> " x 12 <sup>3</sup> / <sub>4</sub> " to 10 <sup>1</sup> / <sub>4</sub> " x 13 <sup>1</sup> / <sub>2</sub> "	27 <sup>3</sup> / <sub>4</sub> " (705)	13-1/3" x 17-1/8" (347 x 435)	24	(10.9)
V4014	9 <sup>3</sup> / <sub>4</sub> " x 13 <sup>3</sup> / <sub>4</sub> " to 10 <sup>3</sup> / <sub>4</sub> " x 14 <sup>1</sup> / <sub>2</sub> "	27 <sup>3</sup> / <sub>4</sub> " (705)	14-1/8" x 18" (360 x 457)	27	(12.2)
<b>Shielded Models</b>					
V5010	6 <sup>3</sup> / <sub>4</sub> " x 9 <sup>3</sup> / <sub>4</sub> " to 7 <sup>3</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>2</sub> "	28" (711)	11-3/8" x 14-1/2" (290 x 368)	26	(11.8)
V5011	8" x 10 <sup>3</sup> / <sub>4</sub> " to 8 <sup>1</sup> / <sub>2</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	28" (711)	12-1/8" x 15-1/8" (309 x 384)	28	(12.7)
V5012	8 <sup>3</sup> / <sub>4</sub> " x 11 <sup>3</sup> / <sub>4</sub> " to 9 <sup>1</sup> / <sub>4</sub> " x 12 <sup>1</sup> / <sub>2</sub> "	28" (711)	13" x 16-1/4" (330 x 413)	30	(13.6)
V5013	9 <sup>1</sup> / <sub>2</sub> " x 12 <sup>3</sup> / <sub>4</sub> " to 10 <sup>1</sup> / <sub>4</sub> " x 13 <sup>1</sup> / <sub>2</sub> "	28" (711)	13-1/3" x 17-1/8" (347 x 435)	32	(14.5)
V5014	9 <sup>3</sup> / <sub>4</sub> " x 13 <sup>3</sup> / <sub>4</sub> " to 10 <sup>3</sup> / <sub>4</sub> " x 14 <sup>1</sup> / <sub>2</sub> "	28" (711)	14-1/8" x 18" (360 x 457)	35	(15.9)
<b>Heated Models</b>					
V6010	6 <sup>3</sup> / <sub>4</sub> " x 9 <sup>3</sup> / <sub>4</sub> " to 7 <sup>3</sup> / <sub>4</sub> " x 10 <sup>1</sup> / <sub>2</sub> "	28" (711)	11-3/8" x 14-1/2" (290 x 368)	30	(13.6)
V6011	8" x 10 <sup>3</sup> / <sub>4</sub> " to 8 <sup>1</sup> / <sub>2</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	28" (711)	12-1/8" x 15-1/8" (309 x 384)	32	(14.5)
V6012	8 <sup>3</sup> / <sub>4</sub> " x 11 <sup>3</sup> / <sub>4</sub> " to 9 <sup>1</sup> / <sub>4</sub> " x 12 <sup>1</sup> / <sub>2</sub> "	28" (711)	13" x 16-1/4" (330 x 413)	34	(15.4)
V6013	9 <sup>1</sup> / <sub>2</sub> " x 12 <sup>3</sup> / <sub>4</sub> " to 10 <sup>1</sup> / <sub>4</sub> " x 13 <sup>1</sup> / <sub>2</sub> "	28" (711)	13-1/3" x 17-1/8" (347 x 435)	36	(16.3)
V6014	9 <sup>3</sup> / <sub>4</sub> " x 13 <sup>3</sup> / <sub>4</sub> " to 10 <sup>3</sup> / <sub>4</sub> " x 14 <sup>1</sup> / <sub>2</sub> "	28" (711)	14-1/8" x 18" (360 x 457)	39	(17.7)

**LAKESIDE**  
Ingenuity On Wheels™

Lakeside Manufacturing, Inc.  
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
800-558-8565 • 414-902-6400 • Fax 414-902-6446  
info@eLakeside.com • www.eLakesideFoodservice.com