




A family company manufacturing in the USA

www.glastender.com

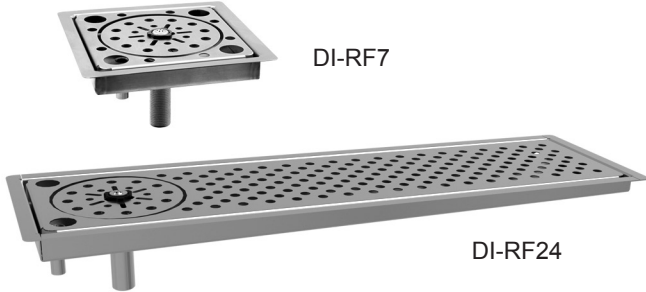

DI-RF7

DI-RF24

Installation

Notes:

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
Install in-line water regulator (included).
A separate shut-off valve is recommended (not included).

Instructions:

- 1. Make a cut-out in work surface using cut-out dimensions (located under Specifications) for appropriate model.
2. Make initial drain connections, especially if access to drain is limited once the unit is in place.
3. Place unit into cut-out and finish plumbing the drain line.
4. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.

Project: _____ AIA# _____
Item #: _____ Qty: _____ SIS# _____
Model #: _____

Drop-In Rinser Faucet

Table with 2 columns: DI-RF and DI-RF7, DI-RF12, DI-RF18, DI-RF24, DI-RF30, DI-RF36

Standard Features

- All stainless steel construction
Pan includes radius interior corners for easy cleaning
Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
Drain pan includes 1/2" flange
Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows

Specifications

Drains

- 1/2" welded tailpiece

Cut-out Dimensions

- Model DI-RF7 - 6-1/4" by 6-1/4"
Model DI-RF12 - 6-1/4" by 11-1/4"
Model DI-RF18 - 6-1/4" by 17-1/4"
Model DI-RF24 - 6-1/4" by 23-1/4"
Model DI-RF30 - 6-1/4" by 29-1/4"
Model DI-RF36 - 6-1/4" by 35-1/4"

Materials

- All stainless steel

Faucet

- Accepts 3/8" cold water lead
30 psi water pressure regulator included
1.2 gallons per minute

03012383 Rinser Faucet Assembly
4004503 Conforms to NSF/ANSI STD 372
ETL Intertek logo


Cleaning & care instructions: https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com
Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.


Drop-In Rinser Faucet

Dimensional Information


DI-RF7
Cut-out size
6-1/4" X 6-1/4"




DI-RF12
Cut-out size
6-1/4" X 11-1/4"




DI-RF18
Cut-out size
6-1/4" X 17-1/4"

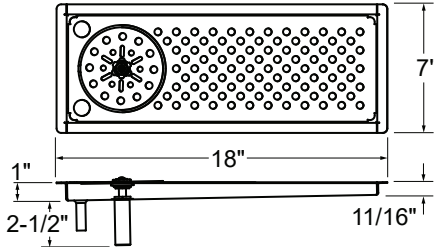

DI-RF24
Cut-out size
6-1/4" X 23-1/4"

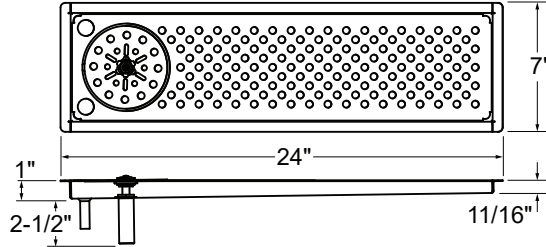

DI-RF30
Cut-out size
6-1/4" X 29-1/4"

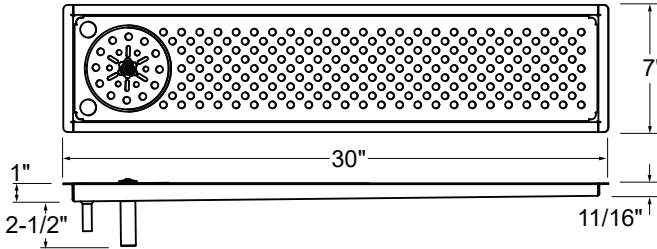

DI-RF36
Cut-out size
6-1/4" X 35-1/4"

