

Fusion

GJDSS Refrigerated Self-Service Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

- **GJDSS4RLB** 51"L x 18-5/8"D x 23"H
- **GJDSS5RLB** 62-7/8"L x 18-5/8"D x 23"H
- **GJDSS6RLB** 75-3/8"L x 18-5/8"D x 23"H
- **GJDSS8RLB** 99-3/4"L x 18-5/8"D x 23"H
- **GJDSS12RLB** 148-1/2"L x 18-5/8"D x 23"H

Included

- Remote DX refrigeration
- LED top light
- One year parts & labor warranty
- Stainless steel rear exterior
- Use with GM remote service models
- Warmest average product temperature of 40°F or less



GJDSS8RLB

Specify	Standard Features	Additional Options
EXTERIOR COLOR	<ul style="list-style-type: none"> • Laminate (stock colors) 	<ul style="list-style-type: none"> • Laminate (non-stock colors) • Powder coated (stock/non-stock colors) • Powder coated Silversan Black • Stainless steel
INTERIOR COLOR	<ul style="list-style-type: none"> • Powder coated Silversan Black 	<ul style="list-style-type: none"> • Stainless steel
LOWER FRONT PANEL COLOR	<ul style="list-style-type: none"> • Powder coated Silversan Black 	<ul style="list-style-type: none"> • Powder coated (stock/non-stock colors) • Stainless steel
BASE SUPPORT	<ul style="list-style-type: none"> • Rail system for shims 	
BUMPER FRONT	<ul style="list-style-type: none"> • 1" Boston bumper (specify color) 	<ul style="list-style-type: none"> • 1" Stainless steel plate rail bumper
END PANELS	<ul style="list-style-type: none"> • Full w/stainless steel mirror interior 	<ul style="list-style-type: none"> • Cutaway w/glass
PRICE TAG MOLDING	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • 1" Price tag molding (black or silver) • Universal price tag molding (clear w/ open top)
LIGHTS	<ul style="list-style-type: none"> • LED 3500K w/ frosted lens 	<ul style="list-style-type: none"> • LED 4000K w/ frosted lens
ELECTRICAL CONNECTION	<ul style="list-style-type: none"> • Electrical leads (remote) 	
REFRIGERATION	¹ <ul style="list-style-type: none"> • Remote DX refrigeration 	¹ <ul style="list-style-type: none"> • Remote w/thermostat, solenoid & TXV
SENSOR	<ul style="list-style-type: none"> • None 	<ul style="list-style-type: none"> • CPC discharge air sensor (remote)
ACCESSORIES		<ul style="list-style-type: none"> • Drain strainer

Std Notes: 1 - Read important notes for remote options


Option Notes: 1 - Read important notes for remote options

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

SIDE VIEW

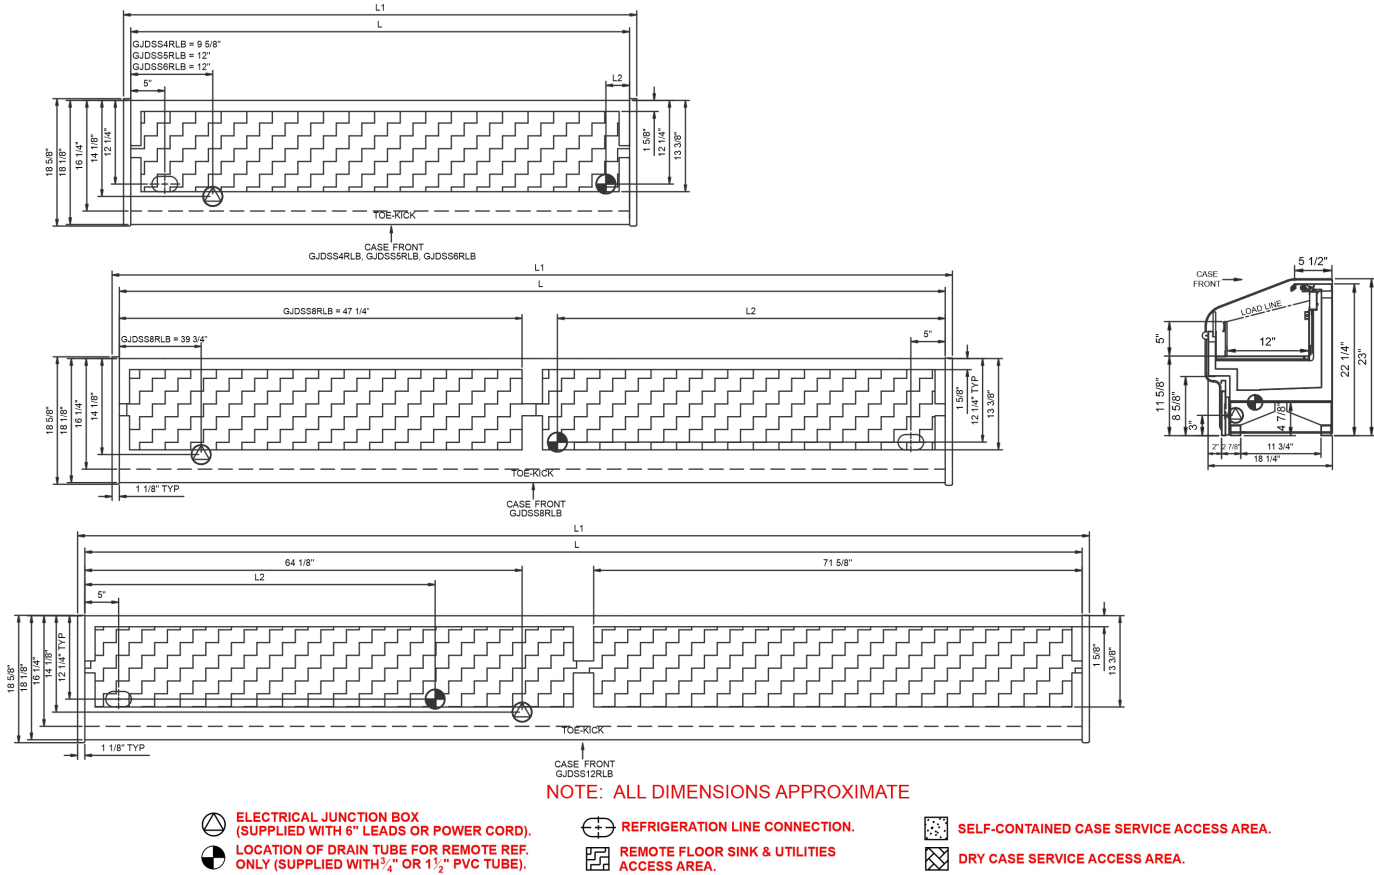

Model Technical Specifications

									Amps							
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
GJDSS4RLB	48.75	51.00	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.58	34	2+G	Leads Single	20.00	1080	1000	400
GJDSS5RLB	60.63	62.88	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.63	43	2+G	Leads Single	20.00	1231	1140	450
GJDSS6RLB	73.13	75.38	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.69	53	2+G	Leads Multiple	20.00	1382	1280	500
GJDSS8RLB	97.50	99.75	3.50	Remote (DX)	Circuit #1	110-120	1	60	1.76	66	2+G	Leads Multiple	20.00	2160	2000	625
				Remote (GLYCOL 35%)	Circuit #1	110-120	1	60	1.76	68	2+G	Leads Multiple	20.00	2160	2000	
GJDSS12RLB	146.25	148.50	51.38	Remote (DX)	Circuit #1	110-120	1	60	1.95	99	2+G	Leads Multiple	20.00	3197	2960	990
				Remote (R744 TRANSCRIT	Circuit #1	110-120	1	60	1.95	99	2+G	Leads Multiple		3197	2960	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

Important Notes:

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 3) Units must be shimmed during installation to ensure the unit is level and plumb.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.