

## Refrigeration Equipment 3-Door Under Counter Refrigerator 72" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738292 (KCHUC72R)

3-Door Under Counter  
Refrigerator 72" Long

### Short Form Specification

Item No. \_\_\_\_\_

3-door refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior

bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Adjustable shelves for flexible storage
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Removable rubber bumper guards for airflow spacing and shock absorption

### Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- White polystyrene interior side panels, for high impact resistance
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Stainless steel worktop, durable functionality


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- 60 mm insulation for energy saving.

### Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445
- Drawer Kit for 48" Mega Top, Salad Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter PNC 880616
- Drawer Kit for Center Section of 70" " Salad, Mega Top Prep Table & 72" Undercounter PNC 880699

APPROVAL: \_\_\_\_\_

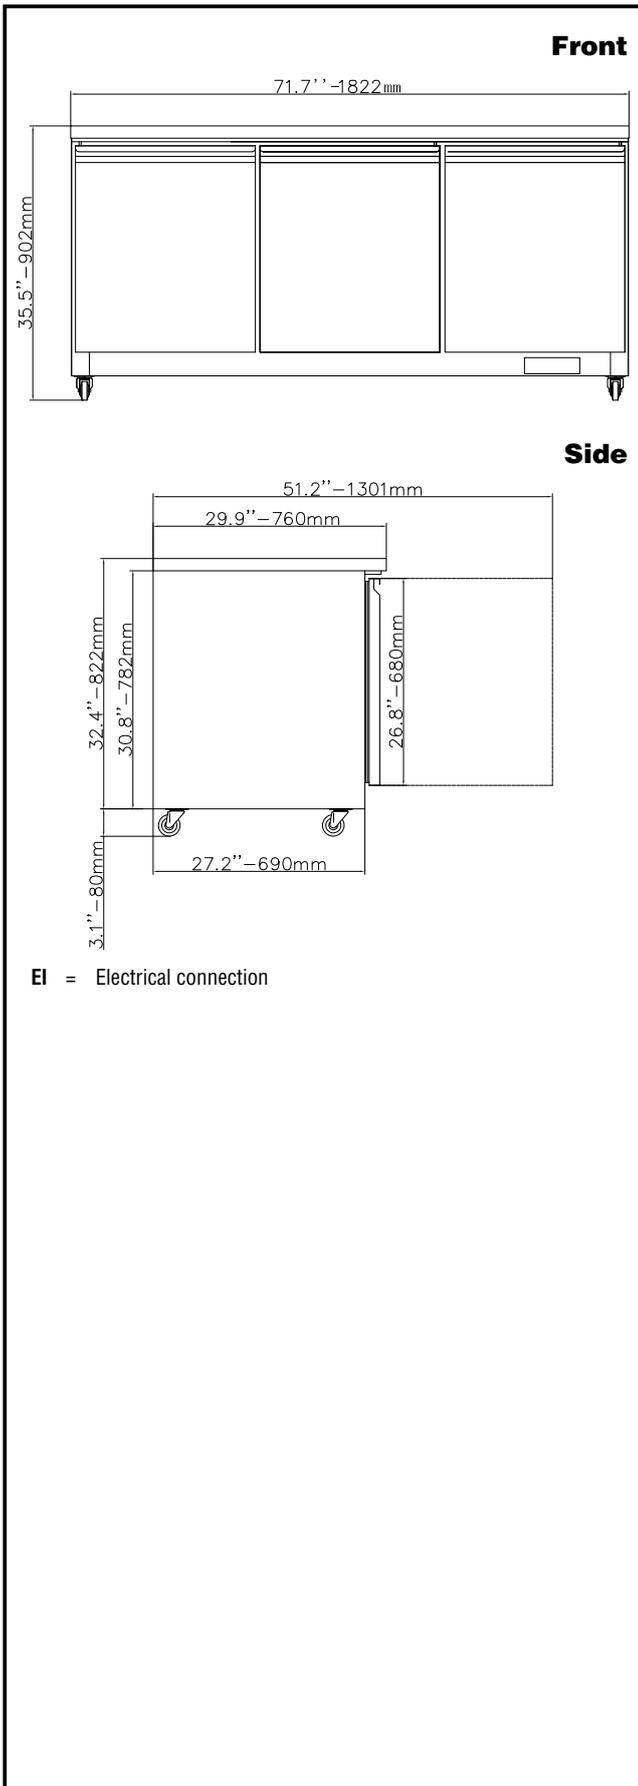

### Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.36 kW
Plug type:	USA NEMA 5-15P

### Capacity:

Gross capacity:	18 cu. feet
-----------------	-------------

### Key Information:

Number and type of grids (included):	3 - Vinyl-Coated steel
Warranty:	3 / 5 years
Door hinges:	1 Left+2 Right
Capacity:	17.9999 cu.ft.
External dimensions, Width:	71 3/4" (1822 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	35 1/2" (902 mm)
Number and type of doors:	3 Full
Internal Dimensions (depth):	24 13/16" / (630 mm)
Internal Dimensions (height):	24 7/16" / (620 mm)
Internal Dimensions (width):	66 15/16" / (1700 mm)
Shipping height:	38 3/16" (970 mm)
Shipping weight:	335 lbs (152 kg)
Shipping volume:	51.02 ft <sup>3</sup> (1.44 m <sup>3</sup> )
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Approvals	ETL C&US; ETL SANITATION

### Refrigeration Data

Condenser type:	Fin & tube
Operating temperature min.:	32 °F
Compressor power:	1/5 hp
Operating temperature max.:	41 °F
Defrost type:	Auto Defrost

### Sustainability

Current consumption:	3.5 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	130 g