

Project
Item
Quantity
FCSI Section 11400
Approved
Date

DRAIN CUP ASSEMBLY

Models

• TD-DC





Standard Features

- The 8' long hose (cut to required length) can be positioned to a remote floor drain. Ideal for the following units that have a Tangent Draw-Off Valve but do not have a floor drain:
 - · floor model stationary kettles
 - floor model tilting kettles
 - floor model tilting skillets
- All Stainless Steel Construction

Tel 1.216.481.4900 Fax 1.216.481.3782


Email steam@clevelandrange.com



Section 10, Page 13 08 / 2017





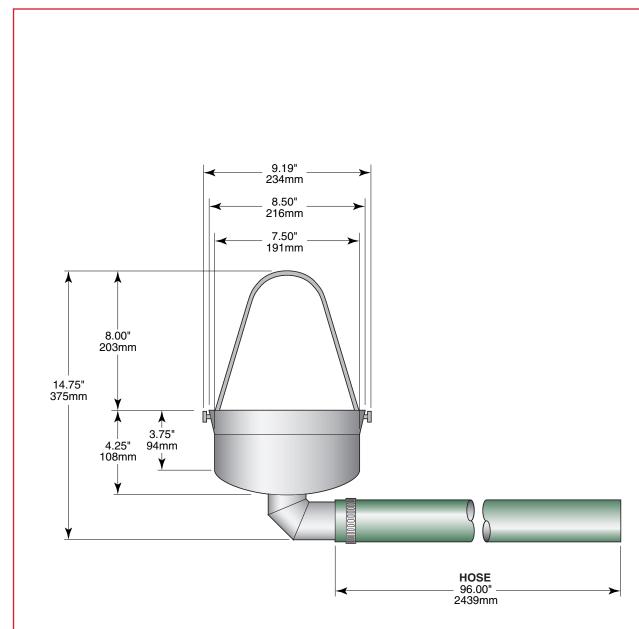

Cleveland Range reserves right of design improvement or modification, as warranted.

Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.

Installation of backflow preventers, wacume breakers and other specific coder requirements is the responsibility of the owner and installer.

Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L., A.G.A., NSF, ASME/N.Bd., CSA, CGA, ETL and others.

(NOT TO SCALE)

