• NE3613DSSV 35-3/4"L x 33"D x 13-5/8"H • NE4813DSSV 47-3/4"L x 33"D x 13-5/8"H

Included

- NOTE: Glass warranty only applicable to first point of delivery
- LED top light
- NOTE: Overall case height is 32-7/8" (includes below counter)
- One piece formed ABS plastic tub
- One year parts & labor warranty




Specify	Standard Features	Additional Options						
FRAME EXTERIOR COLOR	Powder coated Silversan Black	Powder coated (stock/non-stock colors)						
		Stainless steel						
INTERIOR COLOR	Powder coated Silversan Black	NOTE: Interior color must be FDA & NSF approved						
		 Powder coated (stock colors, specify RAL#) 						
		Stainless steel						
BASE SUPPORT	Adjustable, locking casters	• 6"H legs						
LEFT END GLASS	Glass end	No end glass						
RIGHT END GLASS	Glass end	No end glass						
REAR DOORS	None (solid back panel)	Clear glass rear sliding doors						
		Reflective glass rear sliding doors						
LIGHTS	LED 3500K w/ frosted lens	LED 3000K w/ frosted lens						
		LED 4000K w/ frosted lens						
ELECTRICAL CONNECTION	6' Straight blade power cord	6' Locking blade power cord						
		Electrical leads (non-refrigerated)						
REAR NON-VENTED PANEL	None	Note: Same as Rear Vented Panel without vents						
		 Powder coated (stock/non-stock colors) 						
		Stainless steel						
MISCELLANEOUS		Rear door lock						
		Second year parts & labor warranty						
ACCESSORIES		Removable clear acrylic security cover, locking						

Structural Concepts

DELIVERING FRESH. ALWAYS.™

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.						
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F				
1	Packaged non-refrigerated products	Ambient				

PLAN VIEW SIDE VIEW

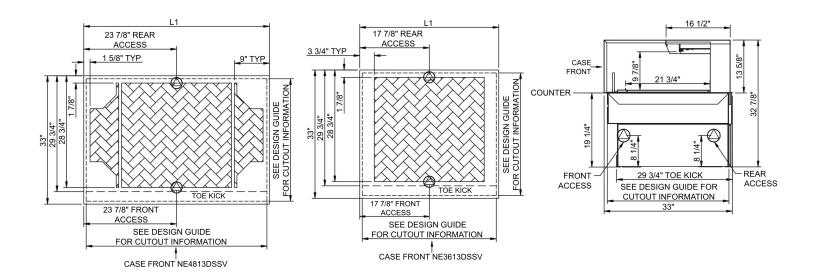

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD). LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 11/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.

SELF-CONTAINED CASE SERVICE ACCESS AREA.

REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																
Model	Ŀ	L1"	L2"	System Circuit Volts			Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wf
NE3613DSSV	N/A	35.75	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	4	2+G	5-15P or L5-15P	N/A	N/A	N/A	500
NE4813DSSV	N/A	47.75	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	6	2+G	5-15P or L5-15P	N/A	N/A	N/A	600

*** Does not include electric defrost on freezer models.

Regulatory Approvals: ETL Listed to UL 65 ETL Sanitation to NSF/ANSI 2



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 19.25" minimum space required beneath counter surface.
- 3) Glass warranty only applicable to first point of delivery.

MARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

21869901