

# BACK BAR EQUIPMENT

## Model: BB69SN

Natural Refrigerant R-290 Model

### 69" Back Bar Cooler - Shallow Depth



ENERGY STAR® Qualified Commercial Refrigerator

Textured baked black enamel finish exterior, stainless steel countertop, interior back and side panels with reinforced stainless steel floor.



## Options and Accessories

(upcharge and lead times may apply)

|                                 |                                                     |
|---------------------------------|-----------------------------------------------------|
| Additional epoxy coated shelves | Food storage rated stainless steel interior (NSF-7) |
| Stainless steel shelves         | Hinged glass door (consult factory)                 |
| Wine rack                       | Casters or legs                                     |
| Riser base*                     | Compressor right (standard on left)                 |

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

### CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Front, rear and side venting louvered grills

Magnetic snap in Santoprene™ door gaskets

Cylinder keyed security lock in each door

Stainless steel reinforced threshold

### MODEL FEATURES

Low profile cabinet design

Electronic control, off cycle defrost

LED interior lighting

Easily accessible and serviceable slide-out condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                          |                                          |
|----------------------------------------------------------|------------------------------------------|
| Net Capacity (cubic feet)                                | 18 (510 l)                               |
| Width, Overall (inches)                                  | 69 (1753 mm)                             |
| Depth, Overall (inches)<br>(including handles & bumpers) | 25 <sup>3</sup> / <sub>16</sub> (640 mm) |
| Depth, Body Only (inches)<br>(less doors)                | 21 (533 mm)                              |
| Height, Overall (inches)                                 | 34 <sup>3</sup> / <sub>4</sub> (883 mm)  |
| Bottle/Can Capacity (12 oz)                              | 65 (per shelf)                           |
| Number of Doors                                          | 2                                        |
| Number of Shelves                                        | 4                                        |

### REFRIGERANT DATA

|                               |                             |
|-------------------------------|-----------------------------|
| Condensing Unit Size (H.P.)   | <sup>1</sup> / <sub>4</sub> |
| R-290 Refrigerant Charge (oz) | 2.5                         |
| Capacity (BTU per hour)*      | 1930                        |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Feed Wires (including ground)                  | 3                   |
| Total Amps (International)                     | 3.5 (1.7)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA


|                          |              |
|--------------------------|--------------|
| Weight (pounds)          | 415 (205 kg) |
| Height - Crated (inches) | 46 (1168 mm) |
| Width - Crated (inches)  | 78 (1981 mm) |
| Depth - Crated (inches)  | 42 (1067 mm) |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

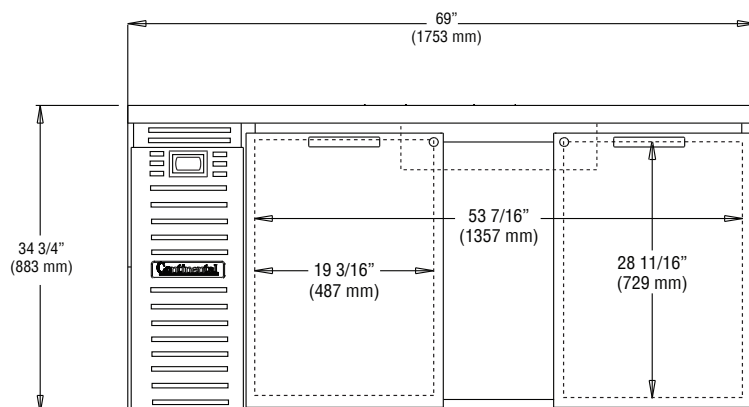

FRONT VIEW

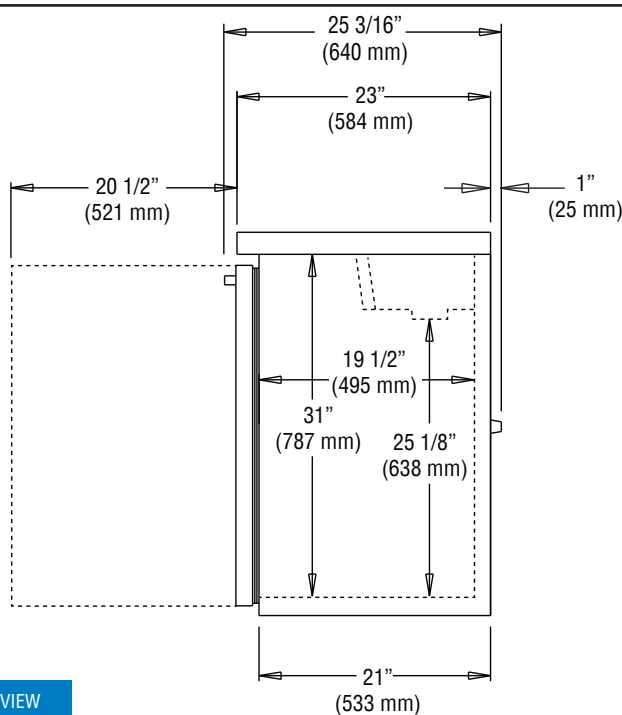

SIDE VIEW

**IMPORTANT NOTE:** Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet **must** not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 1/16/26