

# HD SERIES TAPE LIGHT

## 24V High Output HD - Pro Kit

Designed for lighting professionals, HD Series Pro Kits contain all of the essential installation components needed for basic single color linear lighting systems - just add a controller or dimmer and you're all set. Speed installations by taking out the guess work and questioning compatibility.

- Ready to install 24V tape light pro kit
- Includes 96W hardwire power supply and install accessories
- High Density (HD) LED spacing in High Output grade
- Available in 3000K warm white with 90+ CRI
- Up to 335Lm per foot performance
- Cuttable every 2.46" with 16.4ft max run
- Create custom length power feeds and jumper wires
- Easy installation featuring 3M VBH adhesive backing
- IP54 rating featuring nano-coating protective layer
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life / 5-year limited warranty



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_


LOCATION: \_\_\_\_\_

CATALOG NUMBER: \_\_\_\_\_



HTLHD SERIES QUICK SPECS	
VOLTAGE	24V
WATTAGE	3.65W / ft
LUMENS	335Lm / ft
CCT OPTIONS	3000K
CRI	90+
MAX RUN	16.4ft
CUTTING POINTS	1.51" (38.4mm)
IP RATING	IP54 Unjacketed
DIMMING	TRIAC / ELV (5-100%)
DIMENSIONS	0.39" (10mm) W x 0.06" (1.65mm) H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry / Damp Location
RATED LIFE	50,000 Hours

### HTLHD SERIES QUICK LOOK

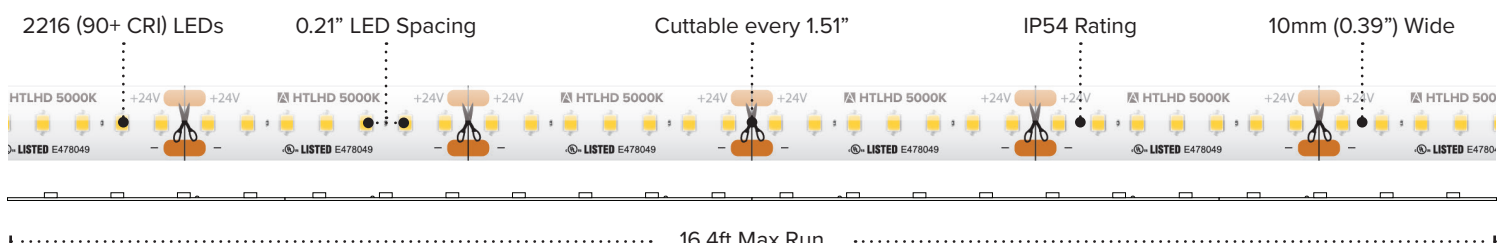


**HTLHD PROKIT ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
<b>HTLHD-WW-PROKIT-16</b>	24V	3000K	16.4 ft	335Lm / ft	3.65W / ft	IP54	90+	1.51" (38.4mm)	16.4 ft



HTLHD Pro Kits Include: (1) 24V ADPT 96W Power Supply / (1) 15ft (20/2) Wire Spool / (8) HD Power Feeds / (3) HD Splice Connectors

**HTLHD PROKIT QUICK SET-UP**

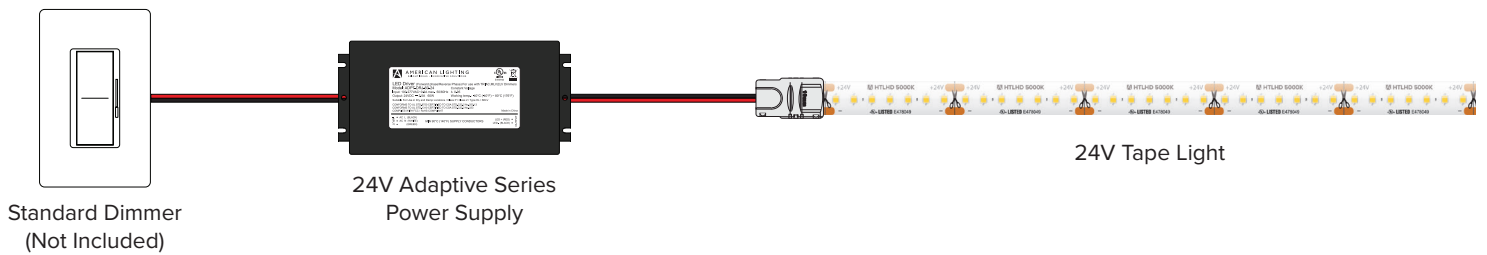

**HTLHD PROKIT ACCESSORIES**

ITEM NUMBER	DESCRIPTION
<b>TL-CONKIT</b>	Trulink 4-in-1 Connection Kit
<b>TL-BLKS</b>	Trulink 4-in-1 Connector Block (QTY 10)
<b>TL-2PWR-HD</b>	HD Power Feed (IP54)
<b>TL-2JUMP6-HD</b>	6" HD Linking Cable
<b>TL-2JUMP24-HD</b>	24" HD Linking Cable
<b>TL-2SPL-HD</b>	HD Tape to Tape Splice Connector
<b>WIRE-15-2PIN</b>	15ft 20/2 Wire Spool
<b>INLINE-SC-CTRL</b>	Simple Select In-line Controller (Single Color)
<b>SPK-REC-5CH</b>	Spektrum Smart Receiver (App Controlled)
<b>LVS-2PIN</b>	In-Line Terminal Splice Block
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway (White)

