


Hub City™ Worm Gear Drives

Accessories & Options


Vertical Mounting Kits

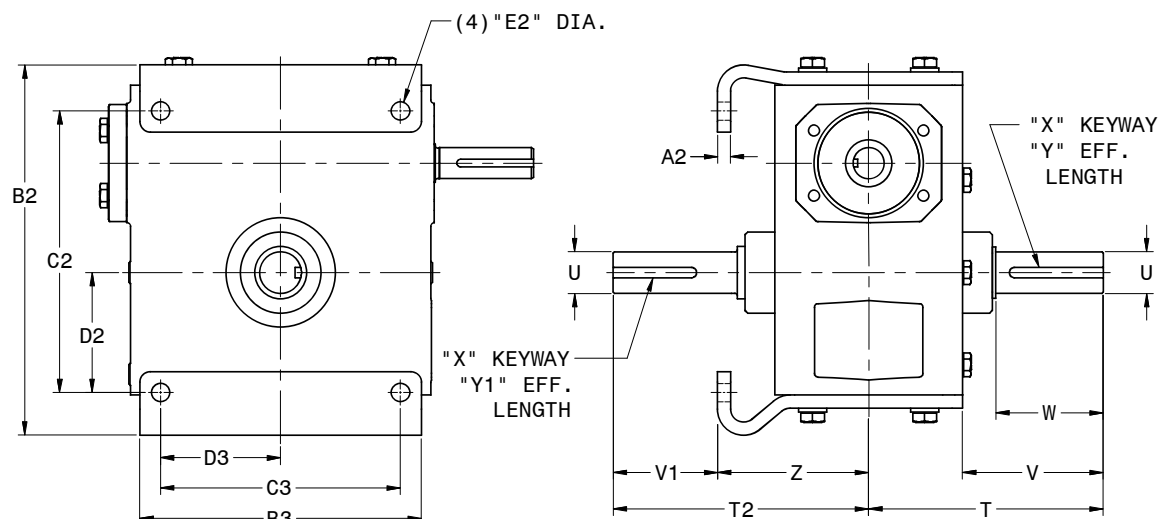

NOTE: Vertical mount kits are intended to be attached so the mounting feet are on the side opposite of the output cover of a hollow bore unit, model "XX2" or "XX5" as shown. **Customer is required to specify the style of the gearbox when ordering to accomplish this.**


BASE MODEL	STOCK BORE REQUIRED
182 OR 185	1.000
212 OR 215	1.000
242 OR 245	1.000

BASE MODEL	STOCK BORE REQUIRED
262 OR 265	1.000
322 OR 325	1.438
382 OR 385	1.938




STYLE: AL
MODEL "XX2"
OR "XX5"
STYLE "B"

PLUS "AL,AR" KIT




STYLE: AR
MODEL "XX2"
OR "XX5"
STYLE "A"

PLUS "AL,AR" KIT




STYLE: BL
MODEL "XX2"
OR "XX5"
STYLE "B"

PLUS "BL,CR" KIT




STYLE: BR
MODEL "XX2"
OR "XX5"
STYLE "A"

PLUS "BR,CL" KIT



STYLE: CL
MODEL "XX2"
OR "XX5"
STYLE "B"

PLUS "BR,CL" KIT



STYLE: CR
MODEL "XX2"
OR "XX5"
STYLE "A"

PLUS "BL,CR" KIT

CONSULT FACTORY FOR VERTICAL SHAFT LUBRICATION RECOMMENDATIONS OR REVIEW VERTICAL SHAFT LUBRICATION INSTRUCTIONS INCLUDED IN KIT.

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

DOWNLOAD AVAILABLE CAD MODELS AT: WWW.HUBCITYINC.COM

SERIES	STYLE	VERTICAL MT. KIT NO.	SHIP WT. LBS.	T	T2	U	V	V1	W	X	Y	Y1	Z	A2	B2	B3	C2	C3	D2	D3	E2
180	AL,AR	0229-02957	7.2	4.50	5.19	0.750	2.78	2.00	1.87	3/16	1.66	1.79									
	BL,CR	0229-02958	7.0	N/A	5.19	0.749	N/A	2.00	N/A	X	N/A	1.79	3.19	.25	7.00	4.75	5.00	4	2.13	2.00	.44*
	BR,CL	0229-02959	6.7	4.50	N/A		2.78	N/A	1.92	3/32	1.66	N/A									
210	AL,AR	0229-02960	9.9	5.00	5.50	0.875	2.94	2.25	1.99	3/16	1.79	1.73									
	BL,CR	0229-02961	9.6	N/A	5.50	0.874	N/A	2.25	N/A	X	N/A	1.73	3.25	.31	7.68	4.75	5.25	4	2.13	2.00	.44
	BR,CL	0229-02962	9.5	5.00	N/A		2.94	N/A	2.04	3/32	1.79	N/A									
W240	AL,AR	0229-03258	12.9	5.63	6.13	1.000	3.60	2.50	2.55	1/4	2.13	1.88									
	BL,CR	0229-03259	12.4	N/A	6.13	0.999	N/A	2.50	N/A	X	N/A	1.88	3.63	.31	9.98	6.50	7.75	5.75	2.88	2.88	.44*
	BR,CL	0229-03260	12.3	5.63	N/A		3.60	N/A	2.45	1/8	2.13	N/A									
260	AL,AR	0229-02966	12.5	5.63	6.13	1.000	3.38	2.50	2.58	1/4	2.13	1.88									
	BL,CR	0229-02967	12.0	N/A	6.13	0.999	N/A	2.50	N/A	X	N/A	1.88	3.63	.31	8.88	6.75	6.75	5.75	2.88	2.88	.44
	BR,CL	0229-02968	11.9	5.63	N/A		3.38	N/A	2.48	1/8	2.13	N/A									
320	AL,AR	0229-02969	17.3	6.38	7.00	1.250	3.78	2.75	2.31	1/4	2.06	2.06									
	BL,CR	0229-02970	16.5	N/A	7.00	1.249	N/A	2.75	N/A	X	N/A	2.06	4.25	.31	10.48	7.25	7.75	6.25	3.25	3.13	.56*
	BR,CL	0229-02971	16.3	6.38	N/A		3.78	N/A	2.35	1/8	2.06	N/A									
380	AL,AR	0229-02972	23.1	7.50	7.75	1.500	4.75	3.25	3.38	3/8	3.00	2.59									
	BL,CR	0229-02973	21.5	N/A	7.75	1.499	N/A	3.25	N/A	X	N/A	2.59	4.50	.31	11.69	8.00	9.00	7	3.75	3.50	.56
	BR,CL	0229-02974	21.3	7.50	N/A		4.75	N/A	3.47	3/16	3.00	N/A									

* SLOTTED HOLES