




# Hub City™ CleanLine™ Gear Drives

## Hub3® Stainless Steel Worm Gear Drives Accessories & Options

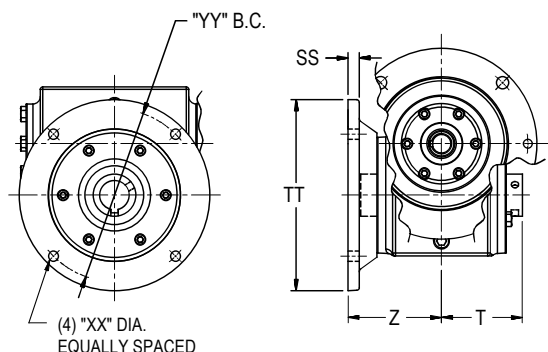

### Hub3® F-Flange Mounting Kits


| SERIES | TORQUE ARM BRACKET KIT NUMBER * | KIT SHIPPING WT. LBS. | T    | Z    | SS   | TT   | YY    |
|--------|---------------------------------|-----------------------|------|------|------|------|-------|
| SSW130 | 0279-00810                      | 6.1                   | 2.38 | 2.52 | 0.38 | 6.00 | 5.000 |
| SSW150 | 0279-00810                      | 6.1                   | 2.71 | 2.87 | 0.38 | 6.00 | 5.000 |
| SSW180 | 0279-00811                      | 6.1                   | 2.75 | 3.18 | 0.38 | 6.50 | 5.875 |
| SSW210 | 0279-00812                      | 6.5                   | 3.00 | 3.69 | 0.44 | 7.88 | 7.000 |
| SSW240 | 0279-00813                      | 18                    | 3.00 | 3.73 | 0.44 | 8.38 | 7.500 |
| SSW260 | 0279-00814                      | 18                    | 3.50 | 3.70 | 0.50 | 8.88 | 8.000 |
| SSW320 | 0279-00815                      | 19                    | 3.94 | 4.03 | 0.50 | 9.88 | 9.000 |

\* F-FLANGE CAN ONLY MOUNT TO OUTPUT COVER SIDE OF REDUCER.

APPROPRIATE ASSEMBLY STYLE OF GEARBOX MUST BE ORDERED TO ACCOMMODATE F-FLANGE MOUNTING. REFERENCE MODEL DIMENSION PAGES K-10-11 & K-14-15.

### Hub3® Torque Arm Brackets

| SERIES* | TORQUE ARM BRACKET KIT NUMBER | KIT SHIPPING WT. LBS. | D     | A    |
|---------|-------------------------------|-----------------------|-------|------|
| SSW130  | 0279-00816                    | 2                     | 1.718 | 1.25 |
| SSW150  | 0279-00817                    | 2                     | 1.906 | 2.50 |
| SSW180  | 0279-00818                    | 2                     | 2.062 | 2.50 |
| SSW210  | 0279-00819                    | 2                     | 2.280 | 3.15 |
| SSW240  | 0279-00820                    | 2                     | 2.500 | 3.25 |
| SSW260  | 0279-00821                    | 2                     | 2.940 | 3.75 |
| SSW320  | 0279-00822                    | 3                     | 3.500 | 5.00 |





\* SAME KTS ARE USED WHEN THE MODEL IS THE FINAL UNIT ON A DOUBLE REDUCTION Hub3® WORM GEAR REDUCER.

### 316 Stainless Steel Clearance Spacers

(For Worm Gear and Bevel Gear Drives)

| BOLT SIZE | SPACER NO. | O.D.  | W     |
|-----------|------------|-------|-------|
| 1/4       | 8471601286 | 0.625 | 0.375 |
| 5/16      | 8471601287 | 0.688 | 0.375 |
| 3/8       | 8471601288 | 0.812 | 0.375 |
| 7/16      | 8471601289 | 0.922 | 0.375 |
| 1/2       | 8471601290 | 0.969 | 0.375 |
| 5/8       | 8471601291 | 1.312 | 0.375 |



DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.  
DOWNLOAD AVAILABLE CAD MODELS AT:  
[WWW.HUBCITYINC.COM](http://WWW.HUBCITYINC.COM)

ORDER (1) SPACER FOR EACH MOUNTING HOLE REQUIRED.  
CONSULT FACTORY FOR ADDITIONAL SIZES AVAILABLE.

CLEARANCE SPACERS ARE AN EXCELLENT METHOD OF ADDING SPACE BETWEEN THE GEARBOX AND ITS MOUNTING SURFACE.

CLEARANCE SPACERS MINIMIZE THE SURFACE CONTACT AREA BETWEEN THE GEARBOX AND ITS MOUNTING SURFACE TO REDUCE POTENTIAL BACTERIAL GROWTH AREAS.

CLEARANCE SPACERS PROVIDE SPACE FOR CLEANING BRUSHES TO BE USED DURING SANITATION PROCESSES. THE SPACERS ALLOW ACCESSIBILITY WHEN CLEANING BY HIGH-PRESSURE WASHING OR CIRCULATION OF FLOWING CHEMICAL SOLUTIONS, CLEANING LIQUIDS AND WATER RINSES.



Select hollow output bore models in this product line are now available with the HubLoc® keyless bushing system. Refer to pages i and ii at front of this catalog for features, available sizes, and ordering information.