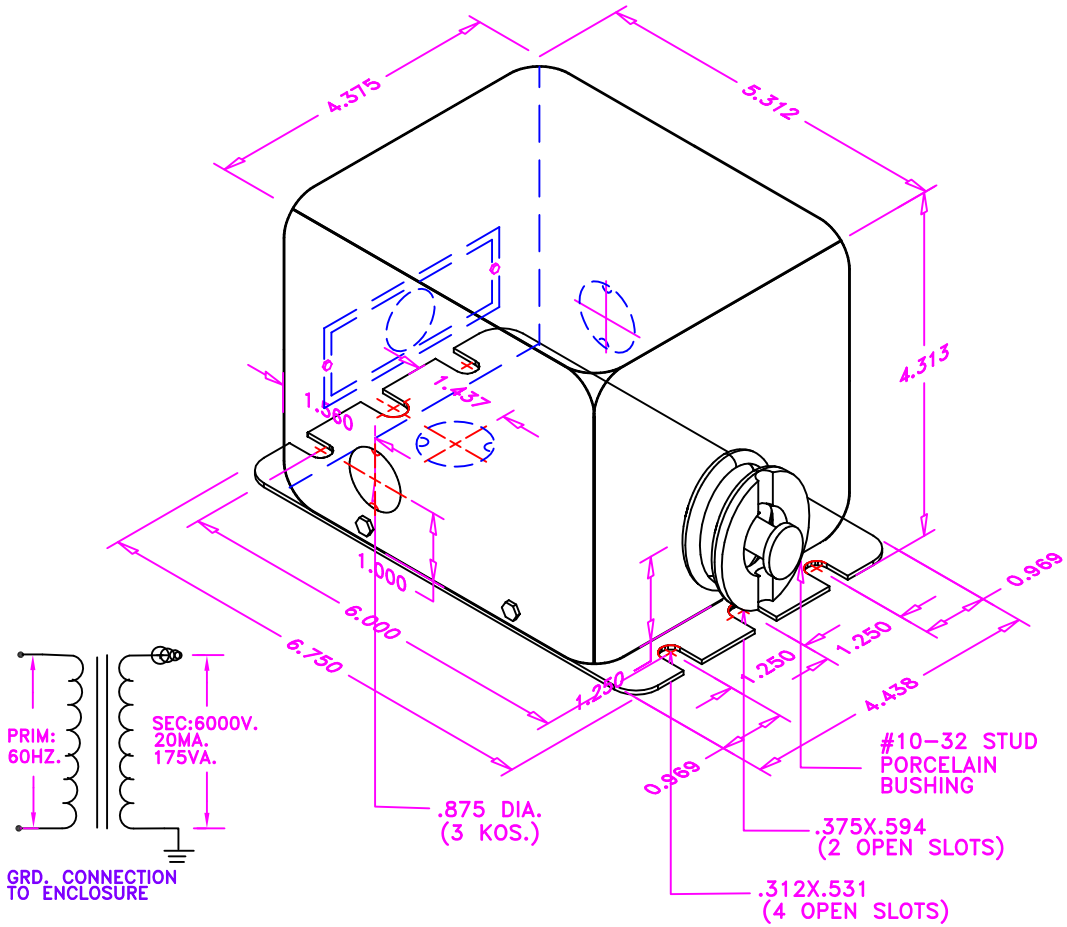

ELECTRICAL SPECIFICATIONS
STYLE: ENCLOSED, AIR COOLED, DRY TYPE, TRANS.
PRIMARY: – VOLTS. 60HZ.
SECONDARY: 6000V. AT 20 MA.
INSULATION SYSTEM: 105°C MINIMUM
TEMPERATURE RAISE: 55°C MAXIMUM
RATING: 175 VA.

NOTE: END OF SECONDARY GROUNDED TYPE

CAT. NO.	A06-SA6	C06-SA6
PRIM. V.	120 V.	240 V.
CYCLE	60 HZ.	60 HZ.
SEC. VA	175 VA	175 VA
SEC. V.	6000 V	6000 V
SEC. MA.	20 MA	20 MA

REV: D DRAWN ON AUTO CAD UPDATED MJ 9-19-00 REV: E PRIM WAS 120 & 240V. MJ 3-19-01

REV: C WAS AN EN-150A WITHOUT KO ADD. EN-150 COVER W/KO 5-1-94
REV: B 5.313 WAS 5.5 MJ 10-24-91
REV: A REDRAWN OLD PRINT 4-3-79

TITLE: OUTLINE FOR 175 VA 1PH. 60HZ.
IGNITION TRANSFORMER

DONGAN ELECTRIC
MFG. CO.

PIONEER TRANSFORMER CO.

TOLERANCES
DECIMAL DIMENSIONS ±.030
FRACTIONAL DIMENSIONS ±1/32

SCALE:
3D

MADE BY	DATE	CHECKED & APPROVED
JAL	4-3-79	

PART NUMBER	DRAWING NUMBER
A06-SA6 C06-SA6	10-366